



Model Name SL461A Digital Signage



Unique selling point

- * OPS Module Support
- * PID panel with high reliability of usage
- * 50,000 hours light life for long use (24/7)
- * Landscap & Portrait orientation mode support
- * Display Port IO support for high video quality
- * DVI Daisy Chain Support
- * RS232 & LAN control for well management

| | | | |
|--------------------|--|--|-----|
| Panel | Screen Diagonal | 46" | |
| | Backlight | LED | |
| | Resolution | FHD 1920 x 1080 (pixels) | |
| | Aspect Ratio | 16 : 9 | |
| | Brightness | 500nits | |
| | Contrast Ratio | 4000:1 | |
| | Viewing Angle | 178 degree (H) / 178 degree (V) | |
| | Color gamut (x% NTSC) | 72% | |
| | Frame Rate | 60Hz | |
| | Response Time | 6.5ms | |
| | Panel bit | 10 bit (8bit+FRC), 1073.7M | |
| | Light life | 50,000 hrs (typ.) | |
| | Orientation | Landscape / Portrait | |
| Interface | Input/Output | Power (AC) In | x 1 |
| | | Audio line-in | x 1 |
| | | Composite video In (BNC) | x 1 |
| | | Composite audio In/ Out (RCA) | x 1 |
| | | Component video (RCA) | x 1 |
| | | External Speaker Out (L/R) | x 1 |
| | | D-sub In/ Out | x 1 |
| | | HDMI (Type A) | x 1 |
| | | DVI-D In/ Out | x 1 |
| | | DisplayPort Input | x 1 |
| | | RJ45 | x 1 |
| | RS232 In/ Out | x 1 | |
| | Others | AC power switch | x 1 |
| | | IR receiver | x 1 |
| OPS Slot | | x 1 | |
| Mechanical | Dimensions(W x H x D) | 1052.7x607.3x69 mm | |
| | Weight (without packing / with packing) | 22/27.5 kg | |
| Power | Power supply | 100 V ~ 240 V, 50 Hz / 60 Hz | |
| | Power consumption | <245W, 132W (Typ.) | |
| OSD | On-Screen Display Languages | English/ French/ Portuguese/ Spanish/ Simplified Chinese/ Traditional Chinese(6 Languages) | |
| Accessories | Standard | Remote Control w/ Battery | x 1 |
| | | Power Cord (by region) | x 1 |
| | | Quick Start Guide | x 1 |
| | | VGA(D-sub 15pin) Cable | x 1 |
| | Optional | Stand | |


SL461A Digital Signage

Input/output terminals

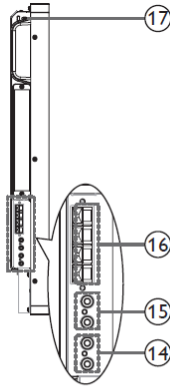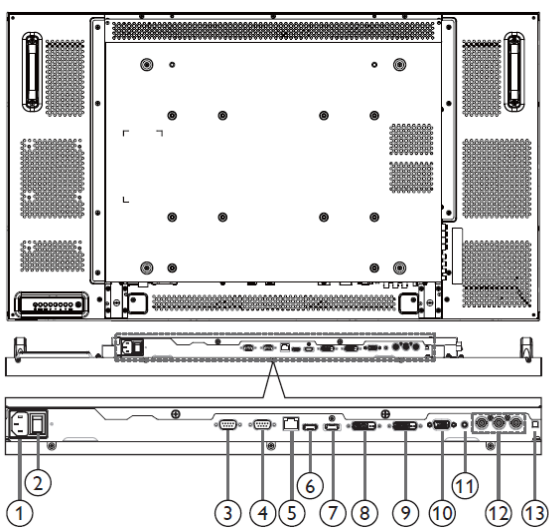

- ① **AC IN**
AC power input from the wall outlet.
- ② **MAIN POWER SWITCH**
Switch the main power on/off.
- ③ **RS232C OUT**
RS232C network output for the loop-through function.
- ④ **RS232C IN**
RS232C network input for the loop-through function.
- ⑤ **RJ-45**
LAN port connection from your OPS device.
- ⑥ **HDMI IN**
HDMI video/audio input.
- ⑦ **DisplayPort**
DisplayPort video input.
- ⑧ **DVI IN**
DVI-D video input.
- ⑨ **DVI OUT / VGA OUT**
DVI or VGA video output.
- ⑩ **VGA IN (D-Sub)**
VGA video input.
- ⑪ **VGA AUDIO IN**
Audio input for VGA source (3.5mm stereo phone).
- ⑫ **COMPONENT IN (BNC)**
Component YPbPr video source input.
- ⑬ **SPEAKER SWITCH**
Internal speaker on/off switch.
- ⑭ **AUDIO IN**
Audio input from external AV device (RCA).
- ⑮ **AUDIO OUT (RCA)**
Audio output from the AUDIO IN jack to an external AV device.
- ⑯ **SPEAKERS OUT**
External speakers output.
- ⑰ **KENSINGTON LOCK**
Used for security and theft prevention.

Wallmount

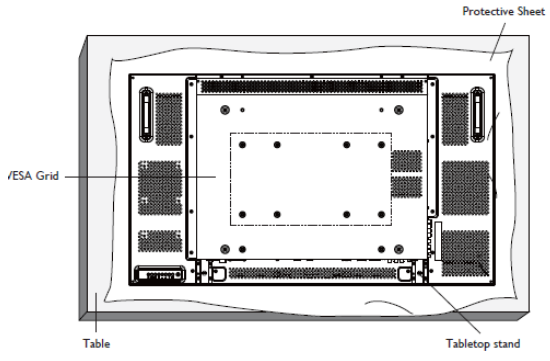

| | |
|---------------|--------------------|
| SL461A | 400(H) x 400(V) mm |
| | 400(H) x 200(V) mm |
| | 200(H) x 200(V) mm |

Dimension

