

E42-6500 Smart LED Firmware Upgrade Guide

內 容：

E42-6500 USB 軟體更新步驟 for end-user。更新軟體將重置系統，

原本自行設定的記憶將消除。

說 明：

1. 軟體下載與 USB.

1.1 由官方網站檔案下載中心下載 E42-6500 軟體(exe 自解壓縮檔)



The screenshot shows the BenQ website's file download center. On the left, there is a navigation menu with three items: "檔案下載中心" (File Download Center), "維修中心" (Repair Center), and "產品註冊" (Product Registration). The main content area is titled "檔案下載中心" and features a search interface. The search filters are set to "大型液晶" (Large LCD) for the product line and "E42-6500" for the product model. Below the search bar, there are two tabs: "BIOS/FirmWare" (selected) and "使用手冊" (User Manual). A table displays the search results for the selected filters:


File	OS	Version	Size	Date
V1.10.00;FW更新前請先閱讀FW Upgrade G...		V1.10.00(exe自解壓縮檔)	177. MB	2012-07-27

A tooltip is visible over the first row of the table, displaying the text: "V1.10.00;FW更新前請先閱讀FW Upgrade Guide".


1.2 下載檔案



1.3 雙擊檔案(exe 檔)自解壓縮後資料匣裡有一 zip 檔(檔名為大寫)

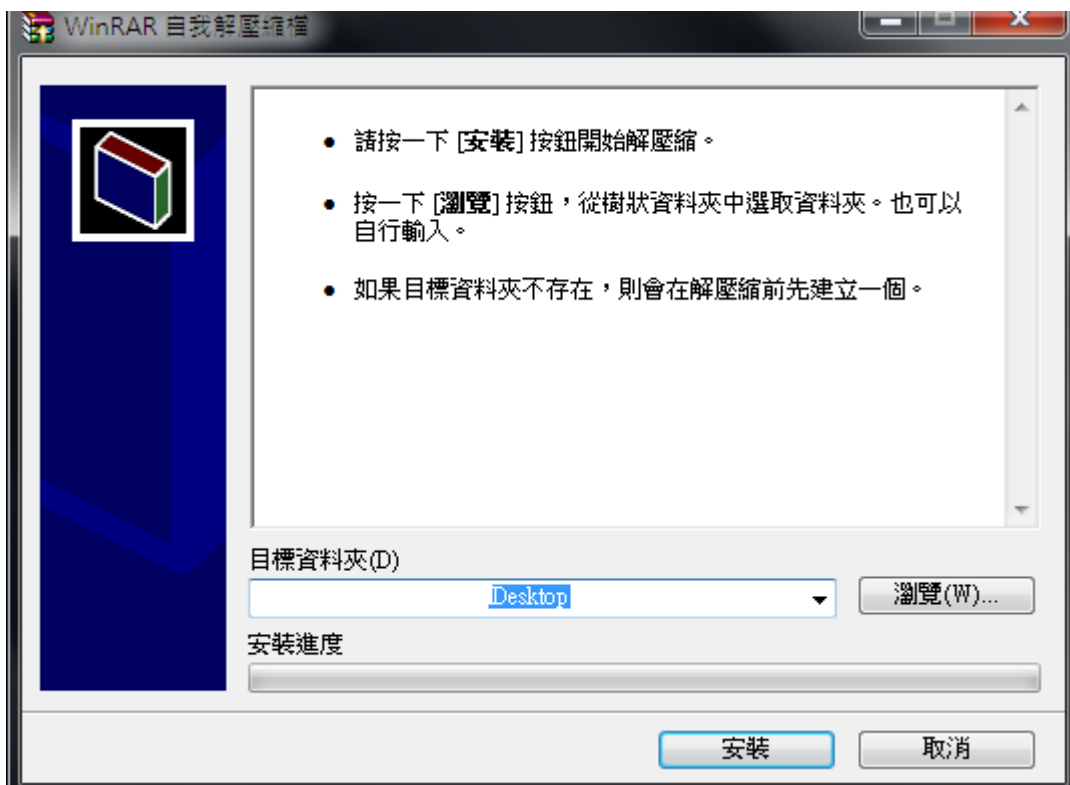

1.4 將 zip 檔置入空間大於 500MB 的 FAT32 USB 隨身碟中,無須解壓縮.

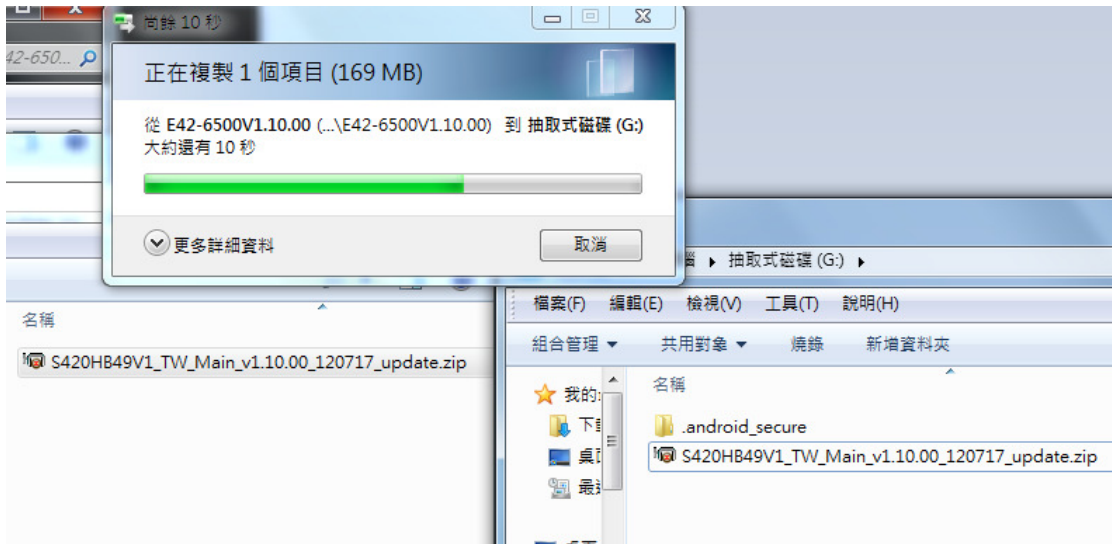

2. 軟體更新步驟.更新軟體過程前後會兩次關機重開.更新後等同重載系統.


舊有設定值的記憶將消除.

2.1 將 E42-6500 在開機狀態將 USB 隨身碟插入機身上 USB 孔.




2.1 以遙控器,目錄→設定→軟體升級→顯示新舊版本→

確認要更新韌體→是

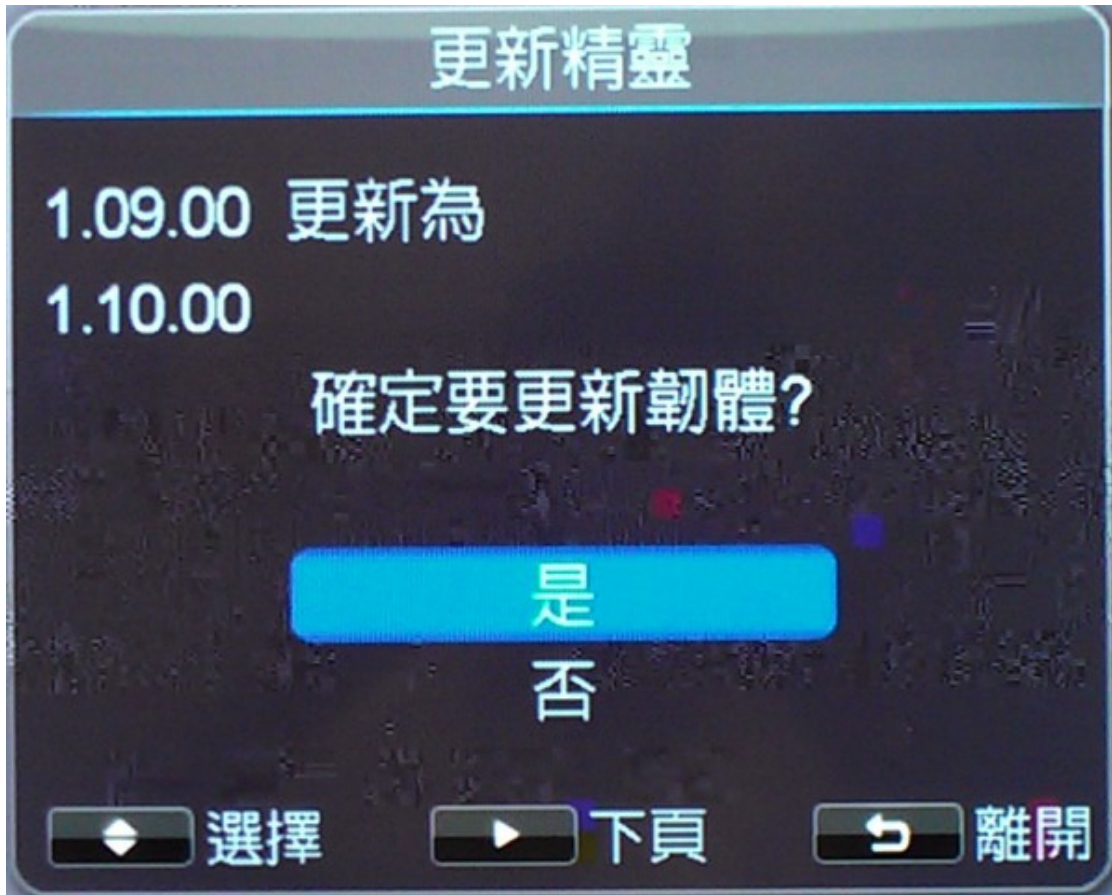


2.2 畫面黑屏出現 BenQ logo

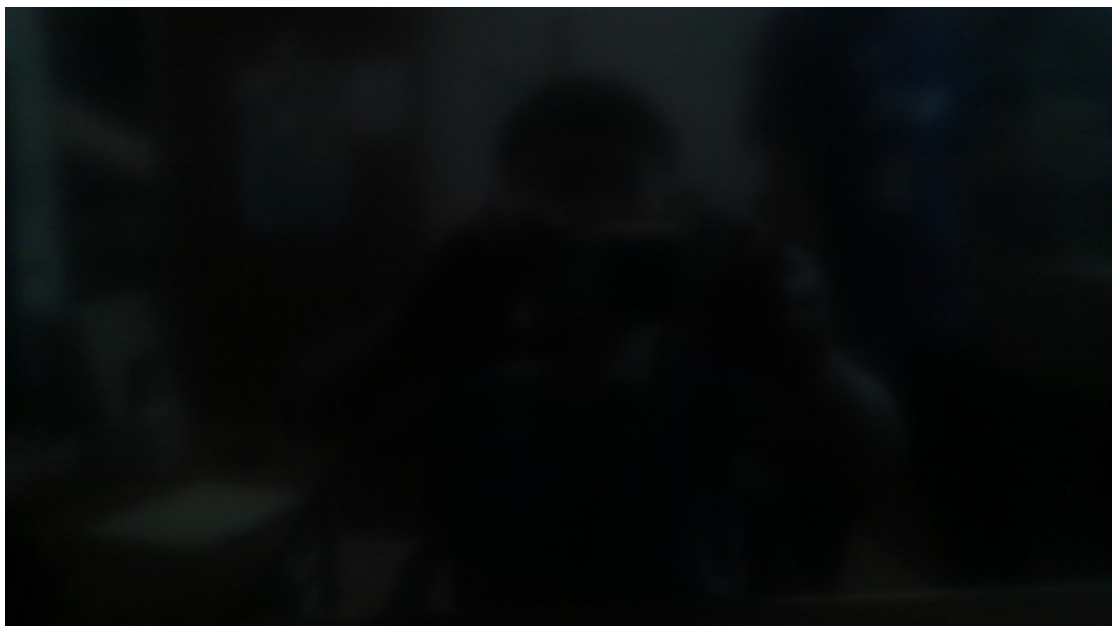





2.3 顯示載入系統 Loading system

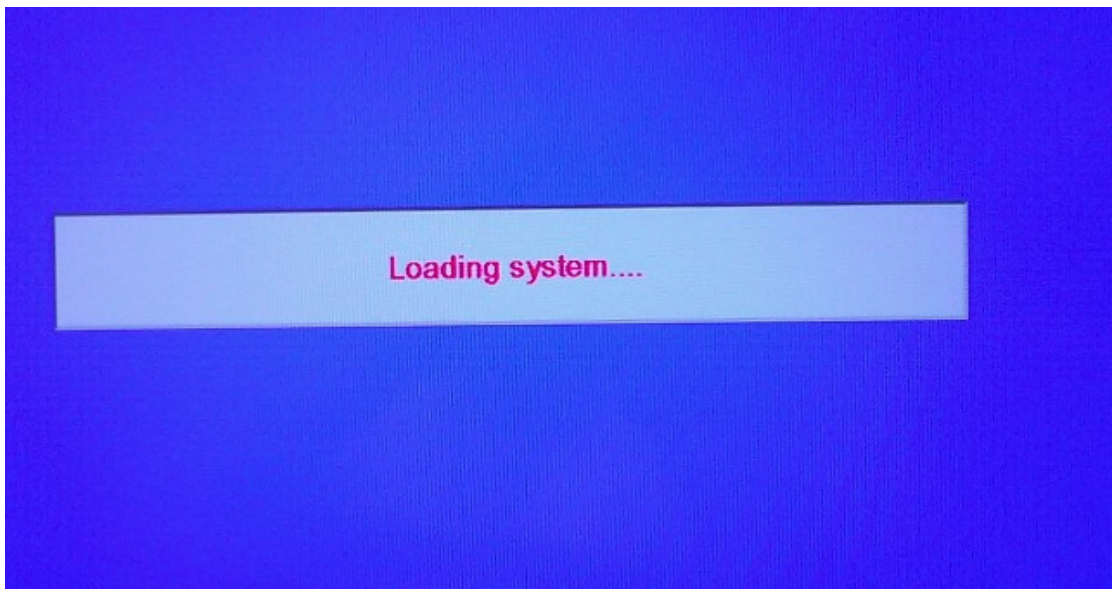


2.4 更新系統 Update system starting

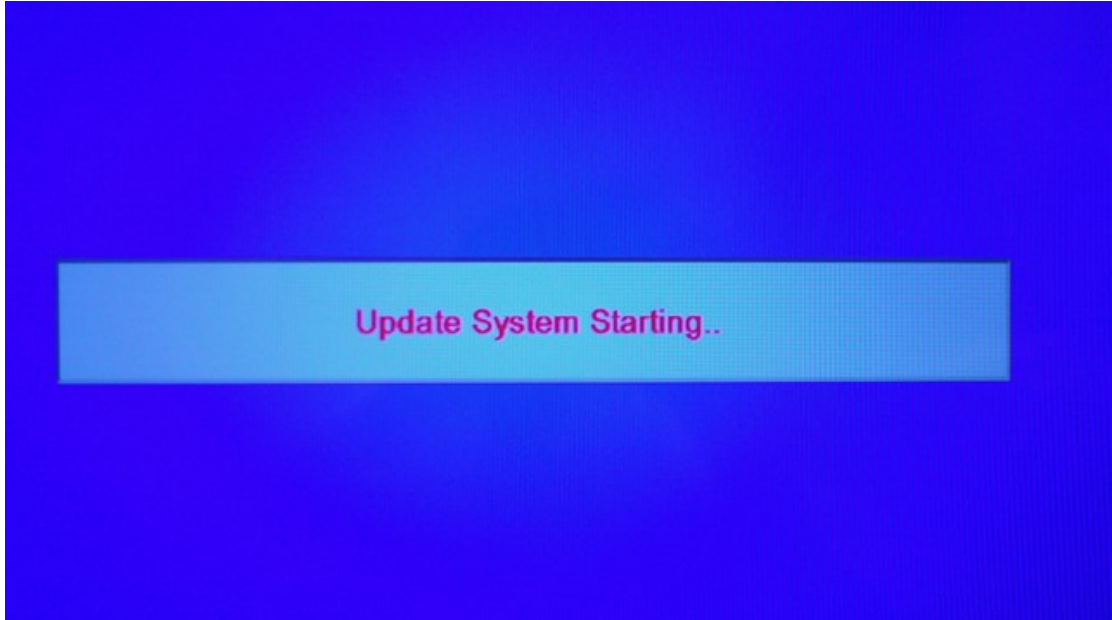

2.5 完成更新 Update complete

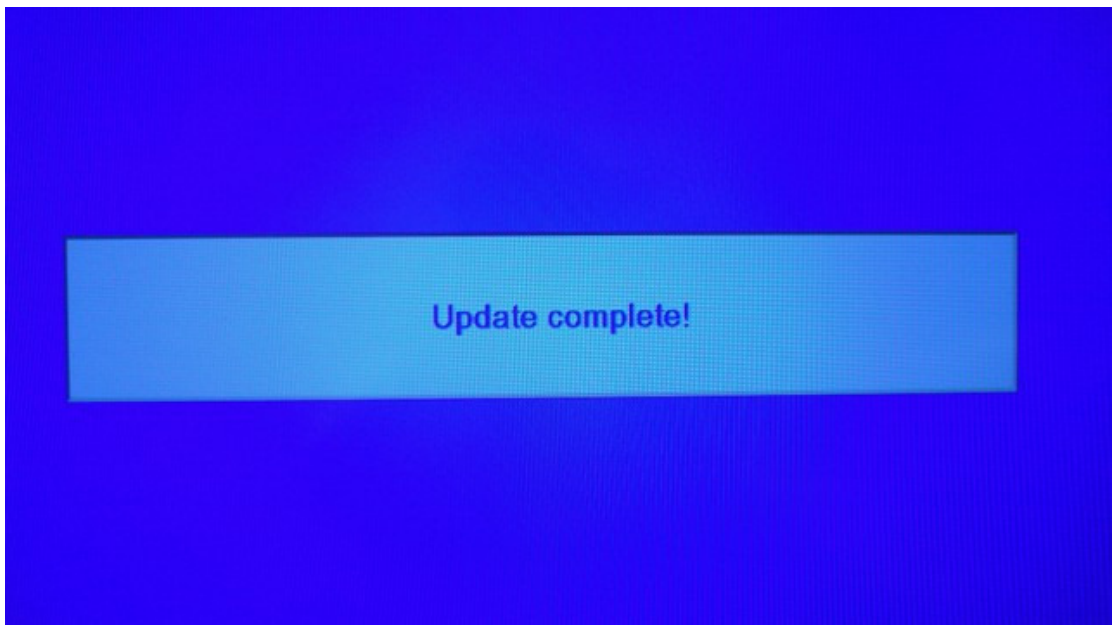

2.6 自動重開機

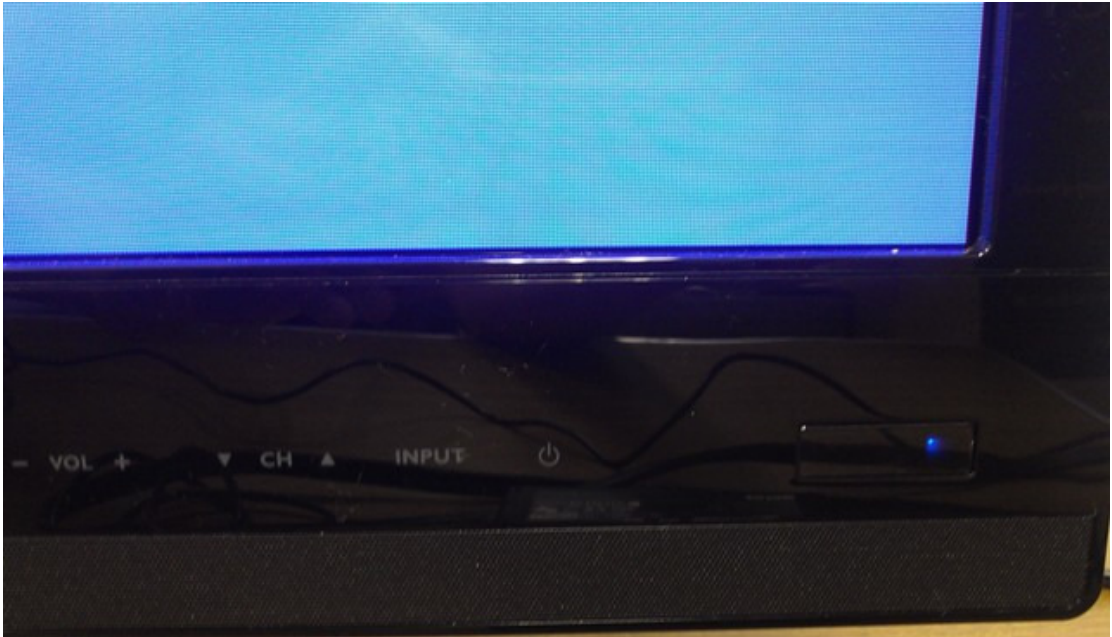

2.7 初始設定,即原本機器記憶已清空並更新系統.

