
# **SL490** Digital Signage



# Input and Output Terminals



No.	Name	Description	
0	AC Switch	Switch the main power on / off.	
2	AC IN	AC power input from the wall outlet.	
•	HDMII IN / 4 HDMI2 IN	HDMI video / audio input.	
6	IR IN / 🗿 IR OUT	IR signal input / output for the loop-through function.	
0	RJ-45	LAN control function for the use of remote control signal from control center.	
8	RS232 IN / <b>②</b> RS232 OUT	RS232 network input / output for the loop-through function.	
10	Audio OUT	Audio output to external AV device.	
0	USB PORT B	Touch connector to PC.	
Ø	USB PORT A	USB <del>•&lt;</del>	
(E)	PC LINE IN	Audio input for VGA source (3.5mm stereo phone).	
<b>(</b>	DVI IN	DVI-I video input.	
<b>(</b>	DVI OUT	DVI-I video output.	
16	DisplayPort IN / 10 DisplayPort OUT	DisplayPort video input / output.	
<b>®</b>	MICRO USB	Connect your USB storage device.	
<b>®</b>	MICRO SD CARD	Connect your MICRO SD CARD.	
20	SECURITY LOCK	Used for security and theft prevention.	

#### **Features**

- Smart Signage / Closed Android
- Embedded X-Sign Player Supports Playing of Multiple X-Sign Files MDA Software Supports Remote Management
- 24/7 Operation
- Landscape / Portrait Display


- Display 4K Daisy Chain
- OTA Function to Continiously Optimize System Performance



#### **Product Specifications**

Panel	Screen Diagonal	49''		
	Backlight	LED		
	Resolution	1920 × 1080		
	Aspect Ratio	16:9		
	Brightness	450 nits		
	Contrast Ratio	1100:1		
	Viewing Angle	178° (H) / 178° (V)		
	Frame Rate	60Hz		
	Response Time	12ms		
	Panel bit	8 bit		
	Light life	50,000 hrs (min.)		
	Orientation	Landscape / Portrait		
nterface	Input	Power (AC) Inlet	x l	
	•	HDMI	× 2	
		DVI-I	x l	
		USB	x 3 (1 USB 2.0 , 1 for voltage supply, 1 micro USB)	
		RS232	x l	
		LAN	x l	
	Output	Audio out	× I (3.5 mm Mini Jack Line out)	
	•	RS232	x l	
		D-sub	x l	
		HDMI	x l	
		DVI-I	x l	
Speaker	Built-in speaker	10W x 2		
1echanical	Dimensions (W $\times$ H $\times$ D)	1097 × 633 × 45.5 mm (without base)		
	Weight (net / gross)	14.7 / 19.9 kg		
ower	Power supply	100 V ~ 240 V, 50 Hz / 60 Hz		
	Power consumption	67W (typical)		
OSD	On-Screen Display Languages	English / French / Spanish / Simplified Chinese / Traditional Chinese / German / Dutch / Polish / Russian / Czech / Danish /		
	, , , ,	Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Arabic / Japanese / Korean / Thai (21 languages)		
Accessories	Standard	Remote Control	x l	
		Power Cord	× 2 (EU, UK)	
		Quick Start Guide	x l	
		VGA (D-sub 15pin) Cable	x l	
		HDMI	x l	
	Optional	Stand		

## **Dimensions**

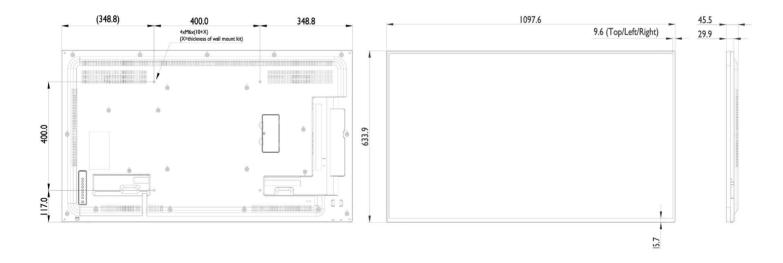

### BenQ Europe B.V.

Meerenakkerweg 1-17 5652 AR Eindhoven The Netherlands Tel: +31 88 8889200 Fax: +31 88 8889299

