



**Model Name** **DH551F Digital Signage**

**Unique selling point**

- \* Dual display simuntaneously
- \* Slim & light than normal 2 sides display
- \* PID operates 24/7, over 50,000 hrs
- \* Landscap & Portrait orientation mode support
- \* With various celling type ( Ceiling/Wall/Stand types) installation to meet different scenarios


<b>Panel</b>	<b>Screen Diagonal</b>	55"		
	<b>Backlight</b>	LED		
	<b>Resolution</b>	FHD 1920 x 1080 (pixels)		
	<b>Aspect Ratio</b>	16 : 9		
	<b>Brightness</b>	700 / 700 nits		
	<b>Contrast Ratio</b>	3000:1		
	<b>Viewing Angle</b>	178 degree (H) / 178 degree (V)		
	<b>Color gamut (x% NTSC)</b>	72%		
	<b>Frame Rate</b>	60Hz		
	<b>Response Time</b>	8ms		
	<b>Panel bit</b>	8 bit, 16.7M		
	<b>Light life</b>	50,000 hrs (typ.)		
<b>Orientation</b>	Landscape / Portrait			
<b>Interface</b>	<b>Input/Output</b>	Power (AC) In	x 1	
		Audio line-in	N/A	
		Composite video In/ Out (BNC)	N/A	
		Composite audio In/ Out (RCA)	N/A	
		Component video (RCA)	N/A	
		External Speaker Out (L/R)	N/A	
		D-sub In/ Out	N/A	
		HDMI (Type A ) in	x 2	
		DVI-D In/ Out	N/A	
		DisplayPort Input	N/A	
		RJ45	N/A	
RS232 In/ Out	N/A			
<b>Others</b>	AC power switch	x 1 (Power box)		
<b>Mechanical</b>	<b>Dimensions(W x H x D)</b>	1516.0 x 858.0 x 23.4 mm		
	<b>Bezel Width (T/B/L/R)</b>	64.2/239.1/87.0/87.0 mm		
	<b>Weight (without packing)</b>	49.5 kg		
<b>Power</b>	<b>Power supply</b>	100 V ~ 240 V, 50 Hz / 60 Hz		
	<b>Power consumption</b>	230W (Typ.)		
<b>OSD</b>	<b>On-Screen Display Languages</b>	EN / ES / FR / DE / IT/ PT / RU /SC / JP /TC		
<b>Software</b>	<b>Color Calibration</b>	N/A		
	<b>Multiple Display Control (MDA)</b>	N/A		
<b>Accessories</b>	<b>Standard</b>	Remote Control w/ Battery	x 1	
		Power Cord (by region)	x 3 (US/UK/EU)	
		Quick Start Guide	x 1	
		HDMI Cables	x 2	
		VGA(D-sub 15pin) Cable	N/A	
		Video wall installation pad (for gap inspection)	N/A	
	<b>Optional</b>	Mounting	Ceiling/Wall/Stand types	
		Edge Finishing Kits	N/A	
		Display PRO color meter (for Color Calibration SW)	N/A	

# DH551F Digital Signage

## Input/output terminals

### Connecting HDMI cables and connectors


Plug two HDMI cables into the cabinet, and ensure that all cable plugs are firmly fitted into the jacks.

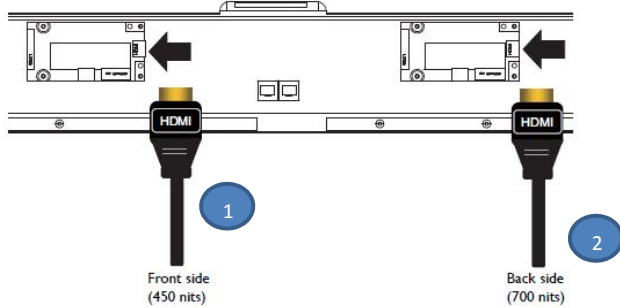

\* Note:  
Before connecting HDMI\_2, please make sure HDMI\_1 is already well connected. Otherwise, there is no signal.

### Connecting the power cord

Plug in the power cable and turn on the AC power switch.

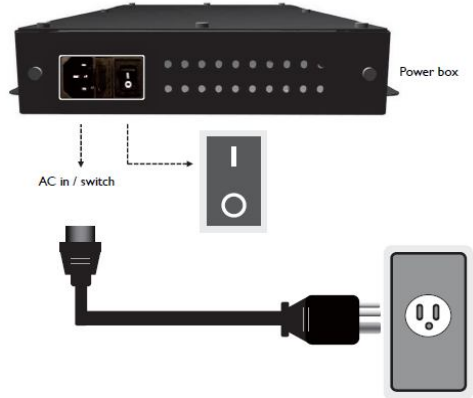

## Dimension

