



Model Name **MW705 Projector**

Unique selling point

- * 4000ANSI Lumen High Brightness
- * 13000:1 High Contrast Ratio
- * New keypad for Easy Operation
- * Whisper Quiet 31dB in daily meeting
- * Wireless Presentation via Your Smart Device by OCast^(optional)

Trade Mark



Projection System	DLP	
Native Resolution	WXGA (1280x800)	
Brightness	4000 ANSI Lumen	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.56~2.68, f=22.04~24.14mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.55~1.7 (Wide 87"±3% @ 2.9m)	
Image Size (Diagonal)	60" ~ 300"	
Zoom Ratio	1.1x	
Lamp Type	240W	
Lamp(Normal/Economic/SmartEco/LampSave)*	3000/4000/6000/7500(80%~30%) hours	
Keystone Adjustment	2D, Vertical & Horizontal ± 40 degrees; Auto vertical keystone ± 30 degrees	
Projection Offset	Vertical: 100% ±5%	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking	
Horizontal Frequency	15K-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility	Frame Sequential: Up to 60Hz 720p
	(Please refer to User Manual for detailed support timing.)	Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin)	×1 (integrate with component)
	HDMI	×2 (HDMI with MHL2.0 ×1, HDMI × 1)
	MHL	× 1 (HDMI with MHL2.0)
	Monitor out	× 1
	Composite Video in (RCA)	× 1
	S-Video in	× 1
	Audio in (Mini Jack)	× 1
	Audio in (L/R)	×1
	Audio out (Mini Jack)	× 1
	Speaker	2W × 1
	USB (Type A)	× 1 (1.5A power supply)
	RS232 (DB-9pin)	× 1
	IR Receiver	×2 (Front+Top)
Dimensions	Dimensions(W x H x D)	331 x 246.2 x 129.4 mm (include feet) 331 x 246.2 x 114.4 mm (exclude feet)
	Weight	3.0 Kg (6.61 lbs)
Power	Power Supply	AC100 to 240V, 3.5 A, 50 to 60 Hz
	Power Consumption	350W(Normal), 261W(Eco), Standby <0.5W
	Power Management Function	Automatic power off after 20 minutes without a display source
Audible Noise	31/28 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	**Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2	
Accessories	Standard	Optional
	Remote Control w Battery	Spare Lamp Kit
	User Manual CD	Video Streaming Dongle - QCast
	Power Cord (by region)	Ceiling mount kit
	VGA cable	Carry bag
	QSG	3D Glasses
	Warranty Card (by region)	

Environmental Notice Lamp in this product contains mercury.
To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org.


*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

** Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.

MW705 Projector


Distance Chart

Screen size				Distance from screen (cm)			Vertical offset (cm)
Diagonal		H (cm)	W (cm)	Min length (max. zoom)	Average	Max length (min. zoom)	
Inch	mm						
60	1524	81	129	200	210	220	0.0
70	1778	94	151	233	245	257	0.0
80	2032	108	172	267	280	293	0.0
90	2286	121	194	300	315	330	0.0
100	2540	135	215	333	350	367	0.0
110	2794	148	237	367	385	403	0.0
120	3048	162	258	400	420	440	0.0
130	3302	175	280	433	455	477	0.0
140	3556	188	302	467	490	513	0.0
150	3810	202	323	500	525	550	0.0
160	4064	215	345	533	560	587	0.0
170	4318	229	366	567	595	623	0.0
180	4572	242	388	600	630	660	0.0
190	4826	256	409	633	665	697	0.0
200	5080	269	431	667	700	733	0.0
250	6350	337	538	833	875	917	0.0
300	7620	404	646	1000	1050	1100	0.0

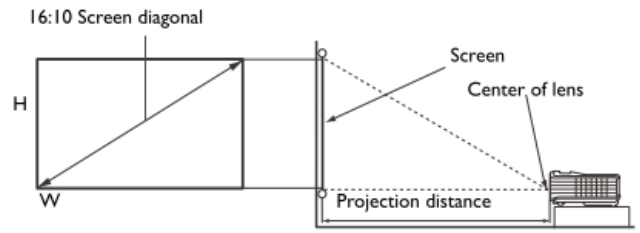

Ceiling mount Chart

Ceiling Mount screw: M4 (Max L = 25 mm; Min L = 20 mm)

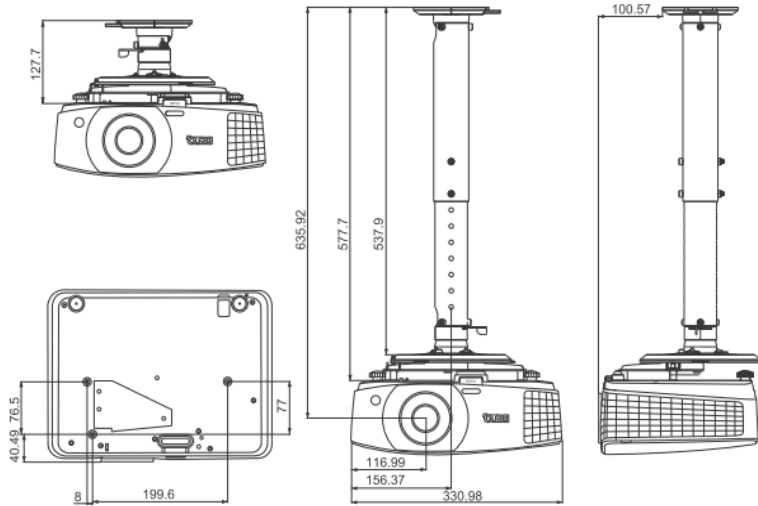

Unit: mm

Dimension



Unit: mm

