



Model Name IL420 Digital Signage


Unique selling point

- * NXO 6-points IR Multitouch
- * PID panel with high reliability of usage
- * 50,000 hours light life for long use (24/7)
- * Landscap & Portrait orientation mode support
- * Display Port IO support for high video quality
- * Ambient light sensor for eye care & energy saving
- * RS232 & LAN control for well management
- * MDA SW supported for remote management

Panel	Screen Diagonal	42"	
	Backlight	LED	
	Resolution	FHD 1920 x 1080 (pixels)	
	Aspect Ratio	16 : 9	
	Brightness	400nits	
	Contrast Ratio	1000:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	68%	
	Frame Rate	60Hz	
	Response Time	9ms	
	Panel bit	8 bit, 16.7M	
	Light life	30,000 hrs (min.) 50,000 hrs (typ.)	
	Orientation	Landscape / Portrait	
Touch solution	Touch tech.	IR	
	Number of touches	6 simultaneous touches	
	Resolution	32767 x 32767	
Cover glass	Thickness	Tempered, 3 mm	
	Hardness	8H	
	Built-in speaker	12W x 2	
Interface	Input/Output	Power (AC) In/ Out	x 1
		Audio line-in	x 1
		Composite video In/ Out (BNC)	x 1
		Composite audio In/ Out (RCA)	x 1
		Component video (RCA)	x 1
		External Speaker Out (L/R)	x 1
		D-sub In/ Out	x 1
		HDMI (Type A)	x 1
		DVI-D Input	x 1
		DisplayPort Input	x 1
		RJ45	x 1
		RS232 In/ Out	x 1
	Others	AC power switch	x 1
		IR receiver	x 1
USB (Type B) for Touch Module		x 1	
Mechanical	Dimensions(W x H x D)	981x571x121 mm	
	Weight (without packing / with packing)	22.7/26.8 kg	
Power	Power supply	100 V ~ 240 V, 50 Hz / 60 Hz	
	Power consumption	<150W, 120W (Typ.)	
OSD	On-Screen Display Languages	English/ French/ Portuguese/ Spanish/ Simplified Chinese/ Traditional Chinese(6 Languages)	
Touch	OS Supported	Windows XP, Win 7, Win 8: 6 pts (plug & play) Mac 10.7, 10.8: 6 pts (with driver installation) Linux Fedora 15, Ubuntu 12.10: 6 pts (with driver installation)	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 1
		Touch pen	x 0
		Quick Start Guide	x 1
		USB cable (1.8M, A-B)	x 1
		VGA(D-sub 15pin) Cable	x 1
	Optional	Stand	

IL420 Digital Signage

Input/output terminals

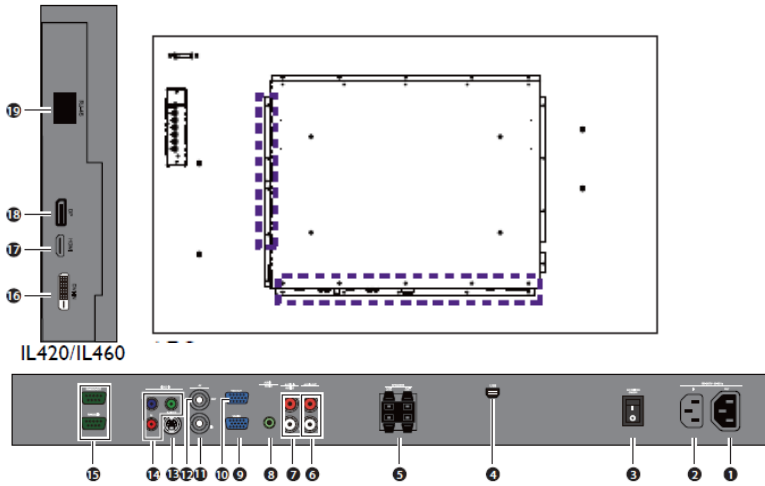


No.	Name	Description
1	AC OUT	Relays the AC power from the AC IN jack to another display.
2	AC IN	Connects to a power outlet via the supplied power cord.
3	AC SWITCH ON/OFF	Turns on or off the main power.
4	USB (IL series only)	Connects the USB cable from the display to a computer to use the touch module.
5	SPEAKERS (R/L) (Not for the IL650)	Outputs audio signals to external speakers.
6	AUDIO OUT (R/L)	Outputs audio signals to an external device.
7	AUDIO IN (AUDIO2)	Receives audio signals from an external device (such as a VCR or DVD player).
8	AUDIO IN (AUDIO1)	Receives audio signals from an external device (such as a computer).
9	VGA IN	Receives analog RGB signals from an external device (such as a computer).
10	VGA OUT	Outputs analog RGB signals from the VGA IN input to another display.
11	AV IN	Receives composite video signals from an external device (such as a VCR or DVD player).
12	AV OUT	Outputs composite video signals from the AV IN input to another display.
13	VIDEO IN (S-VIDEO)	Receives S-Video signals from an external device (such as a VCR or DVD player).
14	VIDEO IN (YPbPr)	Receives component video (YPbPr) signals from an external device (such as a DVD player, HDTV device or Laser disc player).
15	RS232C IN/OUT	For external control and multi-display operation. • RS232C IN: receives control signals from a computer or another display. • RS232C OUT: outputs control signals from the RS232C IN input to another display.
16	DVI-IN	Receives DVI signals from an external device (such as a computer).
17	HDMI	Receives HDMI signals from an external device (such as a Blu-ray disc player).
18	DISPLAY PORT	Connects to a DisplayPort compatible device.
19	RJ-45	Connects to the RJ-45 port on your Ethernet or router.

Wallmount

42"/46"

*Screw type: M6

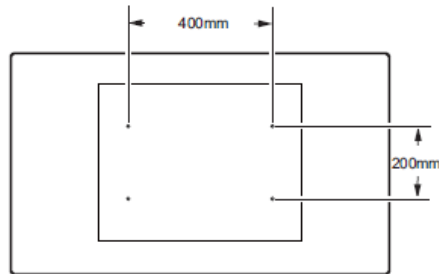

Dimension

