


odel Name	MW769 Proje	ctor					
nique selling point	, Trade Mark						
4200ANSI Lumen High Brightness 13000:1 High Contrast Ratio Blu-ray Full HD 3D support Big zoom ratio: 1.5x SmartEco			TEXAS INSTRUMENTS				
Projection System	DLP						
Native Resolution	WXGA(1280x800)						
Brightness	4200 ANSI Lumen						
Contrast Ratio	13000:1						
Display Color	1.07 Billion Colors						
Lens	F=2.42~2.97, f=20.7~31.05mm						
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)						
Throw Ratio	1.45~2.17						
Image Size (Diagonal)	31" ~ 300"						
Zoom Ratio	1.5x						
Lamp Type	310W						
Lamp(Normal/Economic/SmartEco Mode)*	2500/3000/3500 hours						
Keystone Adjustment Projection Offset	2D, V +/- 30 degree, H +/- 25 degree Vertical: 125% ±5%						
Resolution Support	Vertical: 125% ±5% VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking						
Horizontal Frequency	15K-102KHz	_ (<u> </u>				
Vertical Scan Rate	23-120Hz						
Compatibility	HDTV Compatibility Video Compatibility 3D Compatibility (Please refer to User Manual for detailed support timing.)	480i, 480p, 576i, 576p, 720p, 10 NTSC, PAL, SECAM Frame Sequential: Up to 60Hz 7 Frame Packing: Up to 24 Hz 108 Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p	20p 0p				
Dimensions Power	 HDMI Monitor out Composite Video in (RCA) S-Video in Audio in (Mini Jack) Audio in (L/R) Microphone in(Mini Jack) Audio out (Mini Jack) Speaker LAN(RJ-45) USB (Type A) USB (Type B) USB (Type B) USB (Type Mini B) DC 12V Trigger (3.5mm Jack) RS232 (DB-9pin) IR Receiver Dimensions(W x H x D) Weight Power Supply Power Consumption)	x 2 x 1 x 1 x 1 x 1 x 1 x 1 x 2 20W x 1 x 1 x 2 x 1 x 2 x 1 x 2 x 1 x 2 x 1 x 2 x 3 x 1 x 2 x 4 x 1 x 1 x 4 x 4 x 4 x 5 x 5 x 6 x 7 x 7 x 7 x 7 x 7 x 7 x 7 x 7	Hz			
Audible Noise	36/34 dBA (Normal/Economi	c mode)	10000 (100111a), 37000 (ECO), 50				
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Tradition Chinese (28 Languages)						
Picture Modes	Dynamic / Presentation / sRG	B / Cinema / (3D) / User I / User	2				
Accessories	Standard Carry bag Remote Control w Battery User Manual CD Lens Cover	Power Cord (by region) VGA cable QSG Warranty Card (by region)	Optional Spare Lamp Kit Ceiling mount kit				

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


MW769 Projector

Distance Chart




Screen size			Distance	Vertical offset			
Diag	onal	W	Н	Min length	Average	Max length	(mm)
Inch	mm	(mm)	(mm)	(max. zoom)	Average	(min. zoom)	
30	762	646	404	937	1170	1402	50
40	1016	862	538	1249	1559	1870	67
60	1524	1292	808	1874	2339	2804	101
80	2032	1723	1077	2499	3119	3739	135
100	2540	2154	1346	3123	3899	4674	168
150	3810	3231	2019	4685	5848	7011	252
200	5080	4308	2692	6246	7797	9348	337
250	6350	5385	3365	7808	9746	11685	421


Ceiling mount Chart



Ceiling mount screw: M4 (Max L = 25 mm; Min L = 20 mm)

Unit: mm

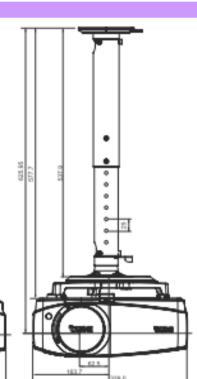

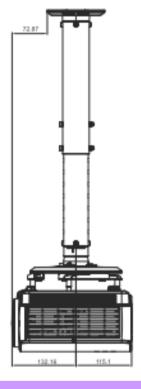

Dimension







Unit: mm