



Model Name SL461A Digital Signage


Unique selling point

- * OPS Module Support
- * PID panel with high reliability of usage
- * 50,000 hours light life for long use (24/7)
- * Landscap & Portrait orientation mode support
- * Display Port IO support for high video quality
- * DVI Daisy Chain Support
- * RS232 & LAN control for well management

Panel	Screen Diagonal	46"	
	Backlight	LED	
	Resolution	FHD 1920 x 1080 (pixels)	
	Aspect Ratio	16 : 9	
	Brightness	500nits	
	Contrast Ratio	4000:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	6.5ms	
	Panel bit	10 bit (8bit+FRC), 1073.7M	
	Light life	50,000 hrs (typ.)	
	Orientation	Landscape / Portrait	
Interface	Input/Output	Power (AC) In	x 1
		Audio line-in	x 1
		Composite video In (BNC)	x 1
		Composite audio In/ Out (RCA)	x 1
		Component video (RCA)	x 1
		External Speaker Out (L/R)	x 1
		D-sub In/ Out	x 1
		HDMI (Type A)	x 1
		DVI-D In/ Out	x 1
		DisplayPort Input	x 1
		RJ45	x 1
	RS232 In/ Out	x 1	
	Others	AC power switch	x 1
		IR receiver	x 1
OPS Slot		x 1	
Mechanical	Dimensions(W x H x D)	1052.7x607.3x69 mm	
	Weight (without packing / with packing)	22/27.5 kg	
Power	Power supply	100 V ~ 240 V, 50 Hz / 60 Hz	
	Power consumption	<245W, 132W (Typ.)	
OSD	On-Screen Display Languages	English/ French/ Portuguese/ Spanish/ Simplified Chinese/ Traditional Chinese(6 Languages)	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 1
		Quick Start Guide	x 1
		VGA(D-sub 15pin) Cable	x 1
	Optional	Stand	


SL461A Digital Signage

Input/output terminals

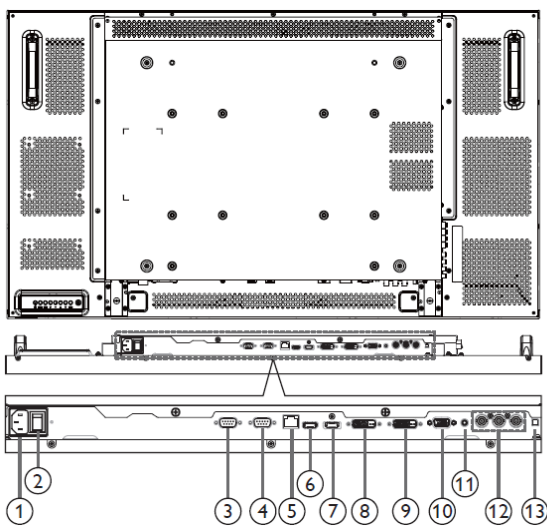

- ① **AC IN**
AC power input from the wall outlet.
- ② **MAIN POWER SWITCH**
Switch the main power on/off.
- ③ **RS232C OUT**
RS232C network output for the loop-through function.
- ④ **RS232C IN**
RS232C network input for the loop-through function.
- ⑤ **RJ-45**
LAN port connection from your OPS device.
- ⑥ **HDMI IN**
HDMI video/audio input.
- ⑦ **DisplayPort**
DisplayPort video input.
- ⑧ **DVI IN**
DVI-D video input.
- ⑨ **DVI OUT / VGA OUT**
DVI or VGA video output.
- ⑩ **VGA IN (D-Sub)**
VGA video input.
- ⑪ **VGA AUDIO IN**
Audio input for VGA source (3.5mm stereo phone).
- ⑫ **COMPONENT IN (BNC)**
Component YPbPr video source input.
- ⑬ **SPEAKER SWITCH**
Internal speaker on/off switch.
- ⑭ **AUDIO IN**
Audio input from external AV device (RCA).
- ⑮ **AUDIO OUT (RCA)**
Audio output from the AUDIO IN jack to an external AV device.
- ⑯ **SPEAKERS OUT**
External speakers output.
- ⑰ **KENSINGTON LOCK**
Used for security and theft prevention.

Wallmount

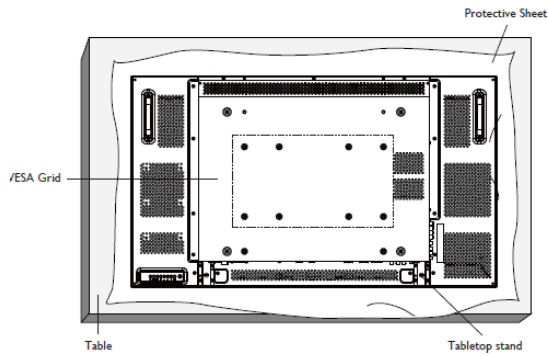

SL461A	400(H) x 400(V) mm
	400(H) x 200(V) mm
	200(H) x 200(V) mm

Dimension

