


Data sheet

BenQ PD2500Q

63.50 cm / 25" LED Display

- WQHD – 2560 x 1440 / 16:9
- 100% Rec.709 / 100 % sRGB
- Panel viewing angle H/V 178°/178°
- DP Daisy Chain
- Height adjustment 130 mm + Pivot

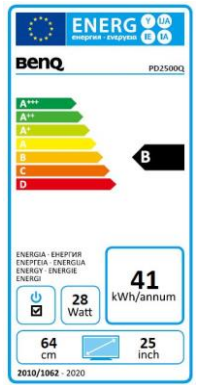

technicolor
Color Certified



	Model : PD2500Q
	Art. No. / EAN Code : 9H.LG8LA.TSE / 471 8755 06868 3
	Typ : 63.50 cm / 25" Wide TFT, IPS-Panel Technology
Panel	Native resolution : 2560 x 1440 WQHD / 16:9
	Pixel pitch : 0.216 mm
	Picture diagonale / -area (W x H) : 635.0 mm / 552.96 mm x 311.04 mm
	Max. Colors : 16.7 Mio.
	Viewing angle H / V (CR>=10) : 178°/ 178°
	Contrast (static) : 1000:1
	Contrast (dynamic) : 20 million:1
	Brightness : 350 cd/m ²
	Response time : 4 ms (GtG)
Connections:	DP input : DP 1.2 / mDP 1.2
	HDMI input : HDMI 1.4
	USB input : USB 3.1 x4 (downstream x4 / upstream x1)
	Headphone jack : yes
	Line in : yes
Output:	DisplayPort output : DP out
	Frequency H/V : 30 - 90 kHz / 24 - 76 Hz
Control	Controls : On/Off hard power switch, 5 sensor touch buttons
	Functions : contrast, brightness, sharpness, vertical and horizontal picture, phase, pixelclock, 2 user, color presettings color temperature, 18 languages, OSD (position, time), input, reset, information
Extra	Special Modes : CAD/CAM mode/ Animation mode/ Darkroom mode/Low Blue Light/ Flicker Free/ Brightness Intelligence
	Security : Kensington Lock
	Mounting : VESA 100 x 100
	Height adjustment range / Pivot : 130 mm / 90° Pivot
	Swivel : -45°/+45° left/right
	Tilt : -5° / +20°
Energy	Power supply : internal
	Voltage for operation : 90 ~ 264 VAC / 47 ~ 63 Hz
	Power consumption (base on mode) : 62 W
	(Sleep Mode) : 0.5 W
Certification	Safety : CE
	Ergonomic : TCO 7.0
Environmental	Environmental : Energy Star 7.0, EPEAT Gold
	Operating : + 5 ~ +40°C ; 20 ~ 90% air humidity
	Storage : -20 ~ +60°C ; 10 ~ 90% air humidity
Characteristic	Weight net. : 7.2 kg
	Housing color : grey
	Dimension in highest lowest position (HxWxD) : 532 x 570.2 x 239.65 mm / 402 x 570.2 x 239.65 mm
	Accessories : Power-, HDMI-, mini DP to DP, USB- cable, Shortguide, CD manual
	Warranty term: 3 years on-site exchange

