

DESIGNED FOR EDUCATION | **MX615**
Future Proof • Excellent Image Quality • Affordable



Features

- Native XGA (1024 x 768) Resolution
- 2700 ANSI Lumens / 3000:1 Contrast Ratio
- USB Reader & Display, HDMI x1
- Long Lamp Life, Closed Captioning
- 3D-Ready, Wireless Display (Optional)

Top / Front View



Top




Front

Specifications

Native Resolution	XGA (1024 x 768)
Brightness	2700 ANSI Lumens
Contrast Ratio	3000:1 (Full on/Full off)
Keystone	Manual Vertical +/- 40 Degree
Aspect Ratio	4:3 Native, 16:9 Selectable
Color	Full 1.07 Billion colors palette
Lens	F = 2.56 ~ 2.8, F=21-23.1mm
Zoom Ratio	Manual Zoom, 1.1:1
Image Size (Diagonal)	24" - 300"
Throw Ratio	1.86 to 2.04 (53"@ 6.5 Feet)
Lamp Life	210W, 3500/5000 hours (Normal/Economical Mode)
PC Compatibility	VGA (640 x 480) to XUGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-99 kHz
Vertical Scan Rate	23-120 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x2 USB Type A x1 (Reader) USB Type Mini-B x1 (Display) HDMI (v1.3) x1 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2 Stereo Mini-Jack x1
Output Terminals PC/AV	Analog RGB: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 2W Speaker x1
Control Terminals	Serial Connector: RS-232 9 Pin (Male) USB Type Mini-B (Page up/down)
Dimensions (W x H x D)	12.24" x 4.09" x 9.6"
Weight	5.84 lbs (2.65 kg)
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	298W (Typical), Standby <1W
Noise Level	30/26 dBA (Normal/Economical Model)
Display Languages	Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese
Picture Mode	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Functions	3D-Ready/USB Display & Reader/3D Color Management/ Direct Power-On/My Screen/Digital Zoom 2x/Closed Captioning/Quick Cooling/Panel Key Lock/Variable Audio Out/Window 7 Compatible/Wireless Display (Optional)
Accessories (Standard)	Quick Start Guide/User Manual (CD)/Remote Control/ Power Cord/VGA Cable/Soft Carrying Bag
Accessories (Optional)	Presentation Plus/Spare Lamp Kit/Universal Ceiling Mount
Lamp P/N	5J.J3T05.001
Limited Warranty	1-Year Parts/Labor / 1-Year or 2000 hours of lamp life

Input and Output Terminals

Back

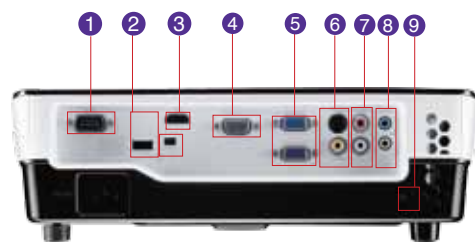

- | | |
|-----------------------|----------------------|
| ① RS-232 x1 | ⑥ S-Video / Video x1 |
| ② USB Type A & Mini-B | ⑦ Audio R/L x1 |
| ③ HDMI x1 | ⑧ Audio In & Out x1 |
| ④ RGB Output x1 | ⑨ Kensington Lock |
| ⑤ RGB In/Component x2 | |

MX615_DM_BQca_6/11



BenQ Canada Corp.
Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

BenQ
Enjoyment Matters