




Features

- Native 1080p (1920 x 1080) Resolution
- 4,000 ANSI Lumens, 11,000:1 High Contrast Ratio
- SmartEco™ Power Saving Technology
- Full 3D Ready and nVidia 3DTV Play
- Big Zoom Ratio: 1.5x
- Full LAN Control & Display
- USB Reader & Display & Wireless Display



Input and Output Terminals

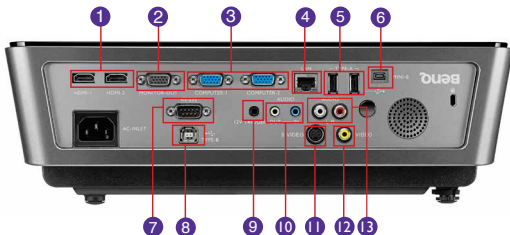

- | | |
|-----------------------------------|-------------------------------|
| 1 HDMI x 2 | 8 USB (Type B) |
| 2 Monitor Out (D-sub 15pin) | 9 DC 12V Trigger |
| 3 Computer in 1 & 2 (D-sub 15pin) | 10 Audio in/Out (Mini Jack) |
| 4 LAN | 11 S-Video In (Mini DIN 4pin) |
| 5 USB (Type A) x 2 | 12 Composite Video in (RCA) |
| 6 USB (Type Mini B) | 13 Audio In L & R (RCA) |
| 7 RS232 (DB-9pin) | |



Specifications

Projection System	DLP®
Native Resolution	1080p (1920 x 1080)
Brightness	4,000 ANSI Lumen
Contrast Ratio	11,000:1
Display Color	1.07 Billion Colors
Lens	F=2.42~2.97, f=20.7~31.05mm
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Throw Ratio	1.398 ~2.09
Image Size (Diagonal)	26" ~ 300"
Zoom Ratio	1.5x
Lamp Type	310W
Lamp (Normal/Economic Mode)*	2500/3000/3500 hours
Keystone Adjustment	1D, Vertical +/- 30 degrees
Projection Offset	Vertical: 130% ±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB = Reduced blanking
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23-120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM, 3D Compatibility: Frame Sequential: Up to 480i Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 60Hz 1080i Top Bottom: Up to 24Hz 1080p
Interface	Computer in (D-sub 15pin) x 2 HDMI x 2 Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 5W x 1 LAN(RJ-45) x 1 USB (Type A) x 2 USB (Type B) x 1 USB (Type mini B) x 1 DC 12V Trigger (3.5mm Jack) x 1 RS232 (DB-9pin) x 1 IR Receiver x 2 (Front + Rear)
Dimensions (WxHxD)	360.1 x 119.9 x 259 mm
Weight	8.14 lbs (3.7 Kg)
Power Supply	AC100 to 240V, 3.8A, 50 to 60 Hz
Power Consumption	370W(Normal), 300W(Eco), Standby<0.5W
Audible Noise	38/33 dBA (Normal/Economic mode)
Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, QSG, Warranty Card, VGA Cable, Lens Cover, Carry Bag
Accessories (Optional)	Spare Lamp Kit P/N: 5J.J8805.001 Wireless Dongle (WDRT8192) P/N: 5J.J3F28.A01 Ceiling Mount Kit P/N: 5J.J4N10.001
UPC / Part #	8400460-2888-6 / 9H.JA677.25A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2000 hours of lamp life.

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

SH915 06-16-14-BQ.ca



BenQ Canada Corp.

Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.




Because it matters

SH915 Digital Projector

Distance Chart

Ceiling Installation

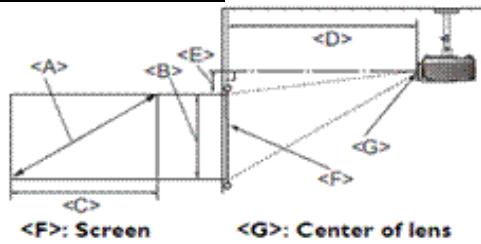

Floor Installation


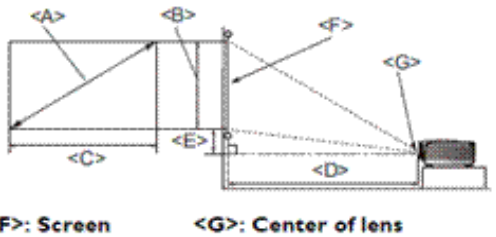


Image Size				Distance (mm)			Offset (mm) A (mm) @ Wide mode
Diagonal		Width (mm)	Height (mm)	Min distance	Average	Max distance	
Inch	mm						
50	1270	1107	623	1547	1930	2313	
60	1524	1325	747	1857	2317	2776	
70	1778	1550	872	2166	2703	3239	
80	2032	1771	996	2476	3089	3701	
90	2286	1992	1121	2785	3475	4164	
100	2540	2214	1245	3095	3861	4627	
110	2794	2435	1370	3404	4247	5090	
120	3048	2657	1494	3714	4633	5552	
130	3302	2878	1619	4023	5019	6015	
140	3556	3099	1743	4333	5405	6478	
150	3810	3321	1868	4642	5791	6940	
160	4064	3542	1992	4952	6177	7403	
170	4318	3763	2117	5261	6563	7866	
180	4572	3985	2241	5571	6950	8328	
190	4826	4206	2366	5880	7336	8791	
200	5080	4428	2491	6190	7722	9254	
250	6350	5535	3113	7737	9652	11567	
300	7620	6641	3736	9285	11583	13881	

Ceiling Mount Chart

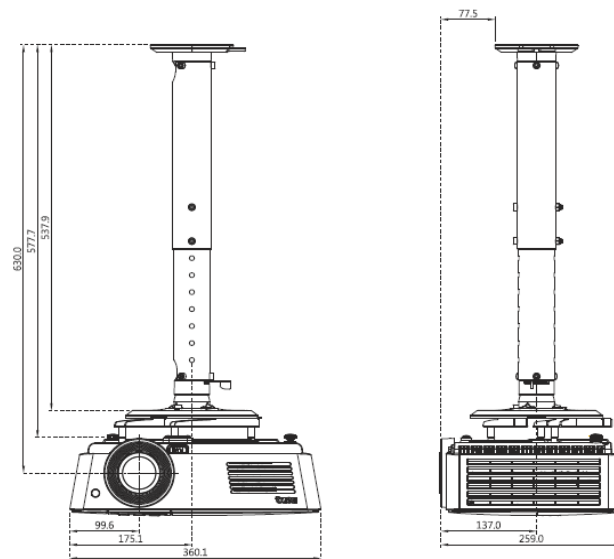

Units: mm

Dimensions



Units: mm

