

DIGITAL PROJECTOR | MW767




Features

- Native WXGA (1280 x 800) Resolution
- 4,200 ANSI Lumens, 13,000:1 Contrast Ratio
- SmartEco™ Power Saving Technology
- Various 3D Format Support, Wireless Display (Opt)
- LAN Display/Control, USB Reader/Display



Input and Output Terminals

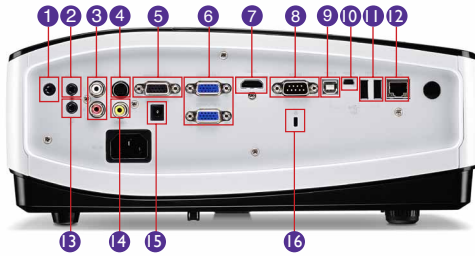

- | | |
|-----------------------------------|------------------------------|
| 1 Audio Out (Mini Jack) | 9 USB (Type B) |
| 2 Audio In (Mini Jack) | 10 USB (Type Mini B) |
| 3 Audio In L/R (RCA) | 11 USB (Type A) |
| 4 S-Video In (Mini DIN 4pin) | 12 LAN (RJ45) |
| 5 Monitor Out (D-sub 15pin) | 13 Microphone in (Mini Jack) |
| 6 Computer In 1 & 2 (D-sub 15pin) | 14 Composite Video in (RCA) |
| 7 HDMI | 15 12V Trigger |
| 8 RS232 (DB-9pin) | 16 Security Lock |

Specifications

Projection System	DLP®																														
Native Resolution	WXGA (1280x800)																														
Brightness	4,200 AL																														
Contrast Ratio	13,000:1																														
Display Color	1.07 Billion Colors																														
Lens	F=2.42-2.98, f=20.7-31.13mm																														
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)																														
Throw Ratio	1.45-2.17 (63" @2m)																														
Image Size (Diagonal)	47"-300"																														
Zoom Ratio	1.5:1																														
Lamp Type	310 W																														
Lamp Life	2500/3000/3500 hours																														
Keystone Adjustment	1D, Vertical +/- 40 degrees																														
Projection Offset	125% ±5%																														
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)																														
Horizontal Frequency	27K~102KHz																														
Vertical Scan Rate	23~120Hz																														
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM																														
Interface	<table border="0"> <tr> <td>Computer in (D-sub 15pin)</td> <td>x 2 (Share with component)</td> </tr> <tr> <td>Monitor out (D-sub 15pin)</td> <td>x 1</td> </tr> <tr> <td>HDMI</td> <td>x 1</td> </tr> <tr> <td>Composite Video in (RCA)</td> <td>x 1</td> </tr> <tr> <td>S-Video in (Mini DIN 4pin)</td> <td>x 1</td> </tr> <tr> <td>Audio in (Mini Jack)</td> <td>x 2</td> </tr> <tr> <td>Audio L/R in (RCA)</td> <td>x 1</td> </tr> <tr> <td>Audio out (Mini Jack)</td> <td>x 1</td> </tr> <tr> <td>Microphone in (Mini Jack)</td> <td>x 1</td> </tr> <tr> <td>Speaker</td> <td>20W x 1</td> </tr> <tr> <td>LAN (RJ45)</td> <td>x 1 (LAN Control & LAN Display & Audio)</td> </tr> <tr> <td>USB (Type A)</td> <td>x 2 (USB Reader & Wireless Display & Remote Desktop)</td> </tr> <tr> <td>USB (Type mini B)</td> <td>x 1 (USB Display & Download)</td> </tr> <tr> <td>RS232 (DB-9pin)</td> <td>x 1</td> </tr> <tr> <td>IR Receiver</td> <td>x 2 (Front & Top)</td> </tr> </table>	Computer in (D-sub 15pin)	x 2 (Share with component)	Monitor out (D-sub 15pin)	x 1	HDMI	x 1	Composite Video in (RCA)	x 1	S-Video in (Mini DIN 4pin)	x 1	Audio in (Mini Jack)	x 2	Audio L/R in (RCA)	x 1	Audio out (Mini Jack)	x 1	Microphone in (Mini Jack)	x 1	Speaker	20W x 1	LAN (RJ45)	x 1 (LAN Control & LAN Display & Audio)	USB (Type A)	x 2 (USB Reader & Wireless Display & Remote Desktop)	USB (Type mini B)	x 1 (USB Display & Download)	RS232 (DB-9pin)	x 1	IR Receiver	x 2 (Front & Top)
Computer in (D-sub 15pin)	x 2 (Share with component)																														
Monitor out (D-sub 15pin)	x 1																														
HDMI	x 1																														
Composite Video in (RCA)	x 1																														
S-Video in (Mini DIN 4pin)	x 1																														
Audio in (Mini Jack)	x 2																														
Audio L/R in (RCA)	x 1																														
Audio out (Mini Jack)	x 1																														
Microphone in (Mini Jack)	x 1																														
Speaker	20W x 1																														
LAN (RJ45)	x 1 (LAN Control & LAN Display & Audio)																														
USB (Type A)	x 2 (USB Reader & Wireless Display & Remote Desktop)																														
USB (Type mini B)	x 1 (USB Display & Download)																														
RS232 (DB-9pin)	x 1																														
IR Receiver	x 2 (Front & Top)																														
Dimensions (WxHxD)	329 x 137.2 x 256.2 mm																														
Weight	3.9 kg																														
Power Supply	AC100 to 240 V, 50 to 60 Hz																														
Power Consumption	340W(typical), Standby<0.5W																														
Audible Noise	36/34 dBA (Normal/Economic mode)																														
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)																														
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2																														
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable																														
Accessories (Optional)	<table border="0"> <tr> <td>Spare Lamp Kit</td> <td>P/N: 5J.J6R05.001</td> </tr> <tr> <td>Ceiling Mount</td> <td>P/N: 5J.J4N10.001</td> </tr> <tr> <td>3D Glasses</td> <td>P/N: 5J.J7K25.001</td> </tr> <tr> <td>Carry bag</td> <td>P/N: 5J.J2V09.011</td> </tr> </table>	Spare Lamp Kit	P/N: 5J.J6R05.001	Ceiling Mount	P/N: 5J.J4N10.001	3D Glasses	P/N: 5J.J7K25.001	Carry bag	P/N: 5J.J2V09.011																						
Spare Lamp Kit	P/N: 5J.J6R05.001																														
Ceiling Mount	P/N: 5J.J4N10.001																														
3D Glasses	P/N: 5J.J7K25.001																														
Carry bag	P/N: 5J.J2V09.011																														
Limited Warranty	4-Year Parts & Labor / 1-Year or 2000 hours of lamp life																														
UPC Code	8400460-2543-4																														

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



MW767 03-15-13-BQca



BenQ Canada Corp.
Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.




Enjoyment Matters


MW767 Digital Projector

Distance Chart

Screen Size				Distance from screen (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min length (Max zoom)	Average	Max length (Min zoom)	
Inch	mm						
40	1020	860	540	12.4	15.8	19.2	67
60	1520	1290	810	18.8	23.9	28.9	101
80	2030	1720	1080	25.2	32.0	38.7	135
100	2540	2150	1350	31.6	40.1	48.5	168
150	3810	3230	2020	47.7	60.3	72.9	252
200	5080	4310	2690	63.8	80.6	97.4	337
250	6350	5380	3370	79.8	100.8	121.8	421
300	7620	6460	4040	95.9	121.1	146.3	505

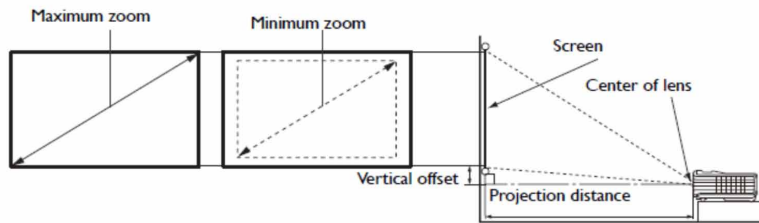

Wall Mount Chart

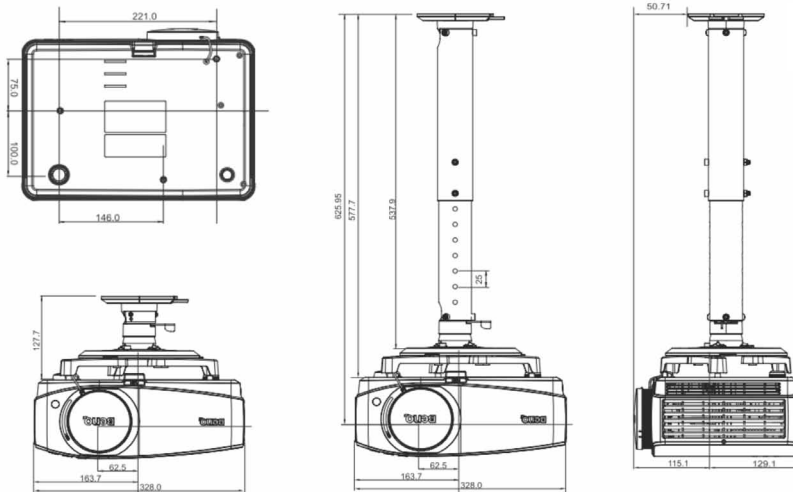

Ceiling mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

Unit: mm

Dimensions

Unit: mm

