

DIGITAL
PROJECTOR

MX501




Features

- Native XGA Resolution (1024x768)
- 2500 ANSI Lumens; 4000:1 Contrast Ratio
- Long Lamp Life, Virtually Color Decay Free
- 3D Ready; Closed Captioning; Digital Zoom 2x
- Quick Cooling; Variable Audio Out



Input and Output Terminals

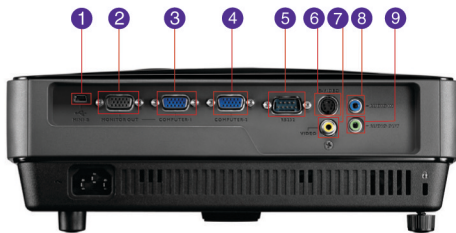

- | | |
|-----------------------------|----------------------------|
| 1 USB (Mini-B) | 6 S-Video (Mini DIN 4-pin) |
| 2 Monitor Out (D-sub 15pin) | 7 Video Out (RCA Jack) |
| 3 Computer-1 (D-sub 15pin) | 8 Audio In (Mini Jack) |
| 4 Computer-2 (D-sub 15pin) | 9 Audio Out (Mini Jack) |
| 5 RS232 (DB-9pin) | |

Specifications

| | |
|-----------------------------|--|
| Projection System | DLP |
| Native Resolution | XGA(1024 x 768) |
| Brightness | 2500 ANSI Lumens |
| Contrast Ratio | 4000:1 |
| Display Color | 1.07 Billion Colors |
| Lens | F=2.56-2.8, f=21-23.1mm |
| Aspect Ratio | Native 4:3 (5 aspect ratio selectable) |
| Throw Ratio | 1.86 ~2.04 (52.5"@ 2m) |
| Image Size Diagonal | 24" ~ 300" |
| Zoom Ratio | 1.1:1 |
| Lamp Type | 220W |
| Lamp Life (Normal/Eco Mode) | 4500/6000 hours |
| Keystone Adjustment | 1D, Vertical +/- 40 degrees |
| Projection Offset | 120%±5% |
| Resolution Support | VGA (640x480) to UXGA (1600x1200) |
| Horizontal Frequency | 31-99 kHz |
| Vertical Scan Rate | 48-120 Hz |
| Compatibility | HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM 3D Compatibility: PC: 120Hz Frame Sequential 3D for resolutions up to WXGA. |
| Interface | Computer In (D-Sub 15pin) x2 (shared with Component) Monitor Out (D-Sub 15 pin) x1 Composite Video In (RCA) x1 S-Video In (Mini DIN 4pin) x1 Audio In (Mini Jack) x1 Audio Out (Mini Jack) x1 Speaker 2W x1 USB (Type Mini-B) x1 (Download & Page Up /Down) RS232 (DB-9Pin) x1 |
| Dimensions (WxHxD) | 11.3" x 3.95" x 9.157" |
| Weight | 5.5 lbs (2.5 kgs) |
| Power Supply | AC 100 to 240 V, 50/60 Hz |
| Power Consumption | 270W (Typical), Standby <1W |
| Audible Noise | 33/27 dBA (Normal/Economic mode) |
| On-Screen Display Languages | English/ France/ Germany/ Italian/ Spanish/ Russian/ Traditional Chinese/ Simplified Chinese/ Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Czech/ Portuguese/ Thai/ Polish/ Hungarian/ Croatian/ Romanian/ Norwegian/ Danish/ Bulgarian/ Finnish/ Indonesian/ Greek/ Hindi/ Arabic (28 Languages) |
| Picture Mode | Dynamic/Presentation/sRGB/Cinema/User 1/User 2 |
| Accessories (Standard) | Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA (D-sub 15 pin) Cable |
| Accessories (Optional) | Presentation Plus P/N:65.J9306.002 Spare Lamp Kit P/N:5J.J5205.001 Ceiling Mount P/N:5J.J2K01.001 3D Glasses P/N:5J.J0T14.011 Carry Bag P/N:5J.J3T09.001 |

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

MX501 6-6-11-US



BenQ Canada Corp.

Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

