




## Features

- Native XGA Resolution (1024x768)
- 3,200 ANSI Lumens
- 13,000:1 Contrast Ratio
- Up to 10,000 Lamp Hours
- LAN Control & HDMI
- Full 3D Ready



## Input and Output Terminals

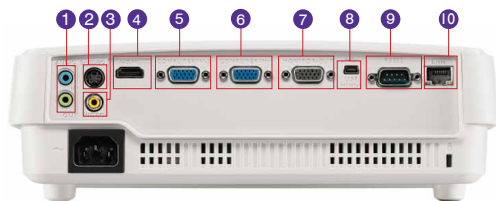

- |                              |                             |
|------------------------------|-----------------------------|
| 1 Audio In & Out (Mini Jack) | 6 Computer-2 (D-sub 15pin)  |
| 2 S-Video in                 | 7 Monitor Out (D-sub 15pin) |
| 3 Composite Video in (RCA)   | 8 USB (Type mini-B)         |
| 4 HDMI                       | 9 RS232 (DB-9pin)           |
| 5 Computer-1 (D-sub 15pin)   | 10 LAN(RJ-45)               |

## Specifications

Projection System	DLP
Native Resolution	XGA (1024x768)
Brightness	3200 ANSI Lumen
Contrast Ratio	13000:1
Display Color	1.07 Billion Colors
Lens	F=2.59~2.87, f=16.88~21.88mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.51~1.97 (65"±3% @ 2m)
Image Size Diagonal	60" ~ 300"
Zoom Ratio	1.3x
Lamp Type	190W
Normal/ Eco/ SmartEco/ Smart-Eco Lamp Care	4500/6000/6500/10000 hours
Keystone Adjustment	1D, Vertical +/- 40 degrees
Projection Offset	Vertical: 115% ±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23-120Hz
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM 3D Compatibility Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin) x 2 HDMI x 1 Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Speaker x 10W x 1 LAN(RJ-45) x 1 USB (Type mini B) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1 (Front)
Dimensions (WxHxD)	283 x 95 x 222 mm (with feet) 283 x 88.7 x 222 mm (without feet)
Weight	1.9 Kg (4.19 lbs)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Normal 280W, Eco 220W, Network standby <6W, Standby <0.5W
Power Management Function	Automatic power off after 20 minutes without a display source
Audible Noise	33/28 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	**Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
Accessories (Standard)	Remote Control w Battery, User Manual CD, Quick Start Guide, Power Cord, VGA Cable, Warranty Card
Accessories (Optional)	Spare Lamp Kit 5J.J9R05.001 Ceiling Mount Kit 5J.J4N10.001 3D Glasses 5J.J9H25.001 Carry Bag 5J.J3T09.001
UPC Code / Part #	8400460-3095-7 / 9H.JC577.14A
Limited Warranty	3 years parts and labor warranty/ 1 year or 2000 hours lamp life

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

\*\* Default mode is Presentation. When 3D is on, Picture Modes only shows 3D. When 3D is off, it is not shown in Picture Modes.



BenQ Canada Corp.

Tel: (416) 363-2367

www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.

MX570 020415\_BQca




Because it matters

# MX570 Digital Projector

## Distance Chart


The screen aspect ratio is 4:3 and the projected picture is in a 4:3 aspect ratio

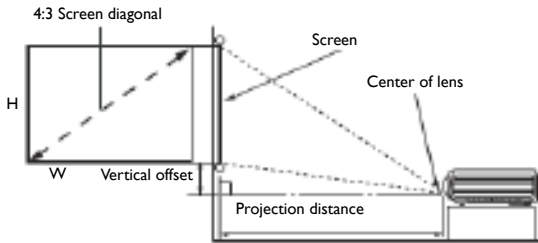

Screen Size				Distance from screen (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min length	Average	Min length	
Inch	mm			Max zoom		Max zoom	
30	762	610	457	920	1061	1201	34
40	1016	813	610	1227	1414	1601	46
50	1270	1016	762	1534	1768	2002	57
60	1524	1219	914	1841	2121	2402	69
80	2032	1626	1219	2455	2829	3202	91
100	2540	2032	1524	3068	3536	4003	114
120	3048	2438	1829	3682	4243	4804	137
150	3810	3048	2286	4602	5304	6005	171
200	5080	4064	3048	6137	7071	8006	229
250	6350	5080	3810	7671	8839	10008	286
300	7620	6096	4572	9205	10607	12009	343


## Ceiling Mount Chart

Ceiling Mount screw: M4  
(Max L=25mm; Min L=20mm)

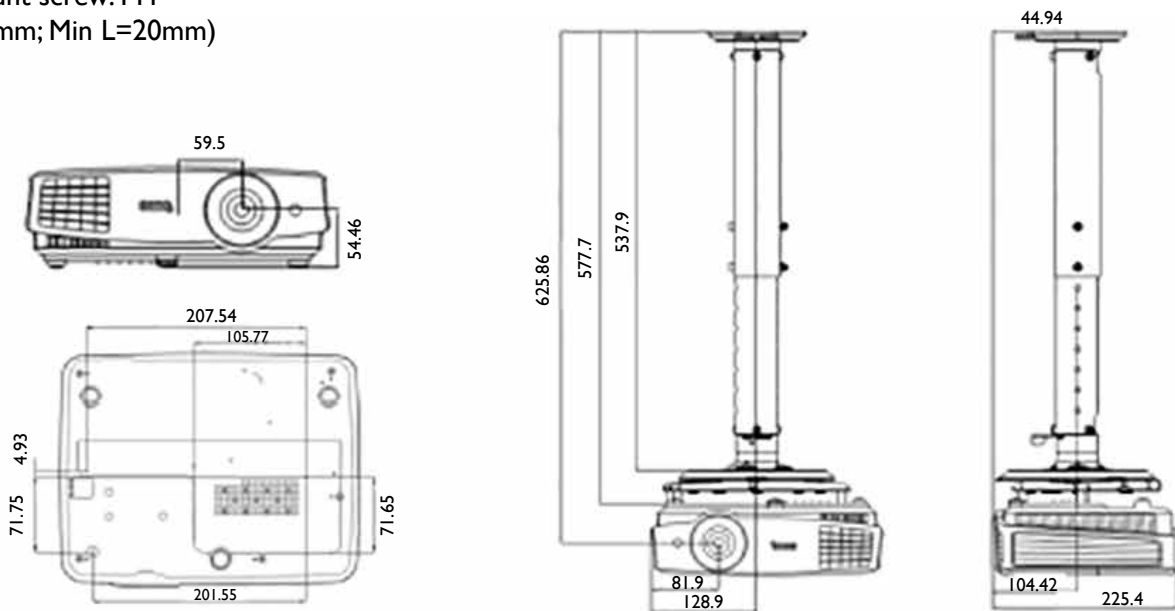

Units: mm

## Dimensions

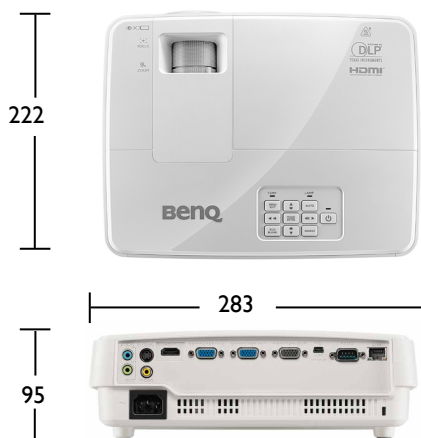

Because it matters