



## Features

- Native XGA (1024 x 768) Resolution
- 3200 ANSI Lumens, 5000:1 Contrast Ratio
- HDMI x1, USB Reader & Display
- 3D-Ready, 3D Color Management
- Long Lamp Life, Wireless Display (Optional)

## Top / Front View




Top



Front

## Input and Output Terminals

Back

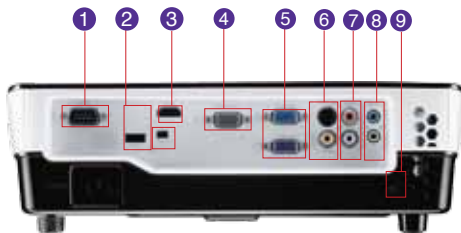

- |                       |                   |
|-----------------------|-------------------|
| ① RS-232 x1           | ⑥ S-Video / Video |
| ② USB Type A & Mini B | ⑦ Audio R/L       |
| ③ HDMI x1             | ⑧ Audio In & Out  |
| ④ RGB Out x1          | ⑨ Kensington Lock |
| ⑤ RGB In/Component x2 |                   |

## Specifications

SMB

|                        |   |
|------------------------|---|
| Native Resolution      | XGA (1024x 768)   |
| Brightness             | 3200 ANSI Lumens  |
| Contrast Ratio         | 5000:1 (Full on/Full off)   |
| Keystone               | Manual Vertical +/- 40 Degree   |
| Aspect Ratio           | 4:3 Native, (5 Aspect Ratio Selectable)   |
| Color                  | Full 1.07 Billion colors palette  |
| Lens                   | F = 2.56 ~ 2.8, F=21-23.1mm   |
| Zoom Ratio             | Manual Zoom, 1.10:1   |
| Image Size (Diagonal)  | 24" - 300"  |
| Throw Ratio            | 1.86 to 2.04 (53"@ 6.5 Feet)  |
| Lamp Life              | 230W, 3500/5000 hours (Normal/Eco-Mode)   |
| PC Compatibility       | VGA (640 x 480) to UXGA (1600 x 1200)   |
| HDTV Compatibility     | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p  |
| Video Compatibility    | NTSC, PAL, SECAM  |
| Horizontal Frequency   | 31-99 kHz   |
| Vertical Scan Rate     | 23-120 Hz   |
| Input Terminals PC/AV  | Analog RGB/Component: D-Sub 15 Pin x2<br>USB (Type A) x1 (Reader)<br>USB (Mini-B) x1 (Display)<br>HDMI (v1.3) x1<br>S-Video: Mini Din 4 Pin x1<br>Composite Video: RCA x1<br>Audio L/R: RCA x2<br>Stereo Mini-Jack x1                 |
| Output Terminals PC/AV | Analog RGB: D-Sub 15 Pin x1<br>Variable Audio Out: Stereo Mini-Jack x1<br>Speaker: 2W Speaker x1  |
| Control Terminals      | Serial Connector: RS-232 9 Pin x1 (Male)<br>USB Type Mini B (Page Up/Down)  |
| Dimensions (W x H x D) | 12.3" x 4.1" x 9.6"   |
| Weight                 | 5.84 lbs (2.65 kg)  |
| Power Supply           | 100 to 240 VAC, 50/60 Hz  |
| Power Consumption      | 339W (Max), Standby <1W   |
| Noise Level            | 32/27 dBA (Normal/Eco-Mode)   |
| Display Languages      | Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/<br>French/German/Hungarian/Italian/Japanese/Korean/<br>Norwegian/Polish/Romanian/Russian/Simplified Chinese/<br>Spanish/Swedish/Turkish/Thai/Traditional Chinese               |
| Picture Mode           | Dynamic Mode/Presentation Mode/sRGB Mode/Cinema<br>Mode/User 1 Mode/ User 2 Mode  |
| Functions              | 3D-Ready/Freeze/Panel Key Lock/Digital/Auto Off/ "Q" Hot<br>Key for FAQ/Security Password/Quick Cooling/Digital Zoom 2x/<br>Quick Auto Search/High Altitude Mode/Closed Captioning/<br>PC-Free/3D Color Management/Variable Audio Out |
| Accessories (Standard) | Quick Start Guide/User Manual (CD)/Remote Control/Power<br>Cord/VGA Cable/Soft Carrying Bag   |
| Accessories (Optional) | Presentation Plus/Spare Lamp Kit/Wireless Dongle/Ceiling Mount  |
| Lamp P/N               | 5J.J3V05.001  |
| Limited Warranty       | 1-Year Parts & Labor / 1-Year or 2000 hours of lamp life  |

MX660\_DM\_BQca\_6/11



BenQ Canada Corp.

Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

**BenQ**  
Enjoyment Matters