

DIGITAL PROJECTOR | MX703




Features

- Native XGA (1024x768) Resolution
- 3,000 ANSI Lumens, 13,000:1 Contrast Ratio
- LAN Control
- SmartEco™ Power Saving Technology
- DLP® 3D via PC & Blu-Ray/DVD Player



Input and Output Terminals

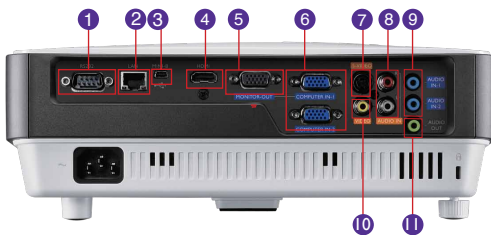

- | | |
|--------------------------|---------------------------|
| 1 RS-232 (DB-9pin) | 7 S-Video |
| 2 LAN (RJ45) | 8 Audio L/R In (RCA) |
| 3 USB (Type Mini B) | 9 Audio In 1 / Audio In 2 |
| 4 HDMI | 10 Video |
| 5 Monitor Out | 11 Audio Out |
| 6 Computer-1/ Computer-2 | |

Specifications

Projection System	DLP
Native Resolution	XGA(1024 x 768)
Brightness	3000 ANSI lumens
Contrast Ratio	13000 : 1
Display Color	1.07 Billion Colors
Lens	F=2.54-2.73, f=18.18-21.84mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.64-1.97 (60" @ 2m)
Image Size (Diagonal)	37" to 300"
Zoom Ratio	1.2:1
Lamp Type	210 W
Lamp (Nor/Eco Mode)*	4500/6000/6500 hours
Keystone Adjustment	ID, Vertical +/- 40 degrees
Projection Offset	110%±5%
Resolution Support	VGA (640 x 480) to UXGA (1600 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	23~120Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 2 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (Mini Jack) x 2 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 USB (Type Mini B) x 1 (Download & Page up/down) Rj45 x 1 (LAN control) RS232 (DB-9pin) x 1 IR Receiver x 2 (Front + rear)
Dimensions(W x H x D)	287.3 x 114.4 x 232.6 mm
Weight	2.4 kg (5.28lbs)
Power Supply	AC 100 to 240 V, 50/60 Hz
Power Consumption	306W (Typical), Standby<0.5W
Audible Noise	33/28 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Modes	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord (by region) User Manual CD, Quick Start Guide, Warranty Card (by region) VGA(D-sub 15pin) Cable
Accessories (Optional)	Presentation Plus 5J.J9301.001 Spare Lamp Kit 5J.J6V05.001 Ceiling Mount 5J.J4N10.001 3D Glasses 5J.J7K25.001 Carry bag 5J.J3T09.001
Limited Warranty	3-Year Parts/Labor; 1-Year or 2000 hours of lamp life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



MX703 02-08-13-BQca



BenQ Canada Corp.
Tel: (416) 363-2367 www.BenQ.ca


BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.



Enjoyment Matters


MX703 Digital Projector

Distance Chart

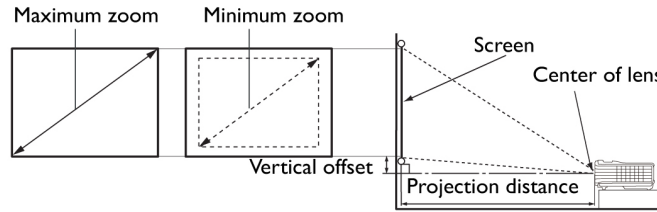


Screen Size				Projection distance (mm)			Vertical offset (mm)
Diagonal		W (mm)	H (mm)	Min distance (mm) (Max zoom)	Average	Max distance (mm) (Min zoom)	
Inch	mm						
40	1016	813	610	1333	1467	1600	30
50	1270	1016	762	1667	1833	2000	38
60	1524	1219	914	2000	2200	2400	46
70	1778	1422	1067	2333	2567	2800	53
80	2032	1626	1219	2667	2933	3200	61
90	2286	1829	1372	3000	3300	3600	69
100	2540	2032	1524	3333	3667	4000	76
120	3048	2438	1829	4000	4400	4800	91
150	3810	3048	2286	5000	5500	6000	114
200	5080	4064	3048	6667	7333	8000	152
250	6350	5080	3810	8333	9167	10000	191
300	7620	6096	4572	10000	11000	12000	229

Ceiling Mount Chart

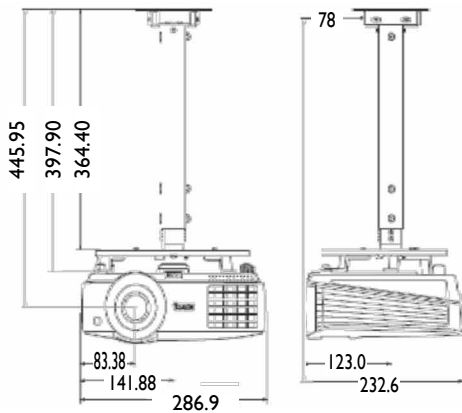

Ceiling Mount Screw: M4 x 8 (Max L = 8 mm)

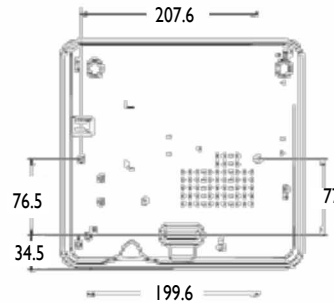

Units: mm

Dimensions

