

DIGITAL
PROJECTOR

MX823ST



Features

- Native XGA (1024x768) Resolution
- 3,200 ANSI Lumens; 13,000:1 Contrast Ratio
- MHL-Enabled HDMI Port, LAN Control
- Short Throw Lens Design
- Up to 10,000 Hours Long Lamp Life
- 3D PC & Blu-Ray Ready
- PointWrite Interactivity Ready


PointWrite Kit (PW02)



Touch Module (PT02)



Input and Output Terminals

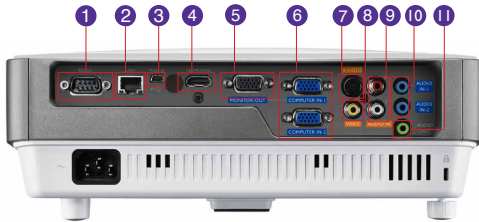

- | | |
|-------------------------------|-----------------------------|
| 1 RS232 (DB-9pin) | 7 S-Video (Mini DIN 4-pin) |
| 2 LAN (RJ45) | 8 Composite Video in |
| 3 USB (Mini-B) | 9 Audio L/R In (RCA) |
| 4 HDMI/MHL | 10 Audio In 1&2 (Mini Jack) |
| 5 Monitor Out (D-sub 15pin) | 11 Audio Out (Mini Jack) |
| 6 Computer-In/2 (D-sub 15pin) | |



Specifications

Projection System	DLP®
Native Resolution	XGA(1024x768)
Brightness	3,200 ANSI lumens
Contrast Ratio	13,000:1
Display Color	1.07 Billion Colors
Lens	F=2.6 f=6.9mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	0.61 (78" @0.96m)
Image Size Diagonal	Optimization 60"-129", Maximum 300"
Zoom Ratio	Fixed
Lamp Type	210W
Lamp(Normal/Economic/SmartEcoCare/LampCare)*	4000/5000/6500/10000
Keystone Adjustment	1D, Vertical +/- 30 degrees
Projection Offset	130% ±5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM 3D Compatibility: Frame Sequential: Up to 720p Frame Packing: Up to 1080p Side by Side: Up to 1080i/p Top Bottom: Up to 1080p
Interface	Computer in (D-sub 15pin) x 2(Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI/MHL x 1 Audio in (Mini Jack) x 2 Audio out (Mini Jack) x 1 Audio L/R in (RCA) x 1 Speaker 10W x 1 USB (Type Mini B) x 1 RS232 (DB-9pin) x 1 LAN (RJ45) x 1
Dimensions (WxHxD)	287.3 x 114.4 x 232.6 mm (w/ feet)
Weight	2.6kg(5.73bs)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	290W(Normal), 240W (Eco), Standby<0.5W"
Audible Noise	33/28 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	Dynamic/Presentation/sRGB/Cinema/User 1/User 2
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord, User Manual CD Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JAG05.001 WM06G3 P/N:5J.J4R10.011 3D Glasses P/N: 5J.J9H25.001 PointWrite Kit PW02 P/N: 5J.J9A26.12E PointWrite Touch PT02 P/N: 5J.J8L26.11E Remote control P/N: 5J.JAD06.001
UPC Code / Part #	8400460-2898-5 / 9H.JAC77.13A
Limited Warranty	3 Years Parts & Labor / 1 Year or 2000 Hours of Lamp Life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



BenQ Canada Corp.

Tel: (416) 363-2367 www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.

MX823ST 043015_BQca


BenQ

Because it matters

MX823ST Digital Projector


Distance Chart

(a) Screen Size				(b) Distance from screen (mm)	(c) Vertical offset (mm)
Diagonal		W (mm)	H (mm)		
Inch	mm				
80	2032	1626	1219	988	183
100	2540	2032	1524	1235	229
120	3048	2438	1829	1481	274
150	3810	3048	2286	1852	343
180	4572	3658	2743	2222	411
200	5080	4064	3048	2469	457
220	5588	4470	3353	2716	503
240	6096	4877	3658	2963	549
270	6858	5486	4115	3333	617
300	7620	6096	4572	3704	686

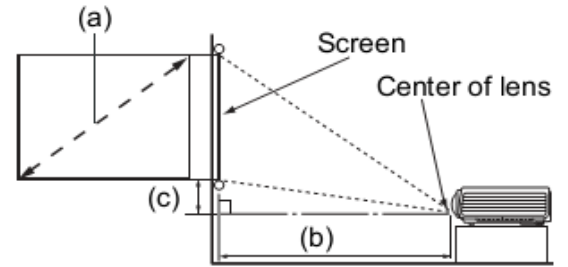

Ceiling Mount Chart

$$\text{Minimum Ceiling Height (mm)} = f + H + b + 60 + 274 + c$$

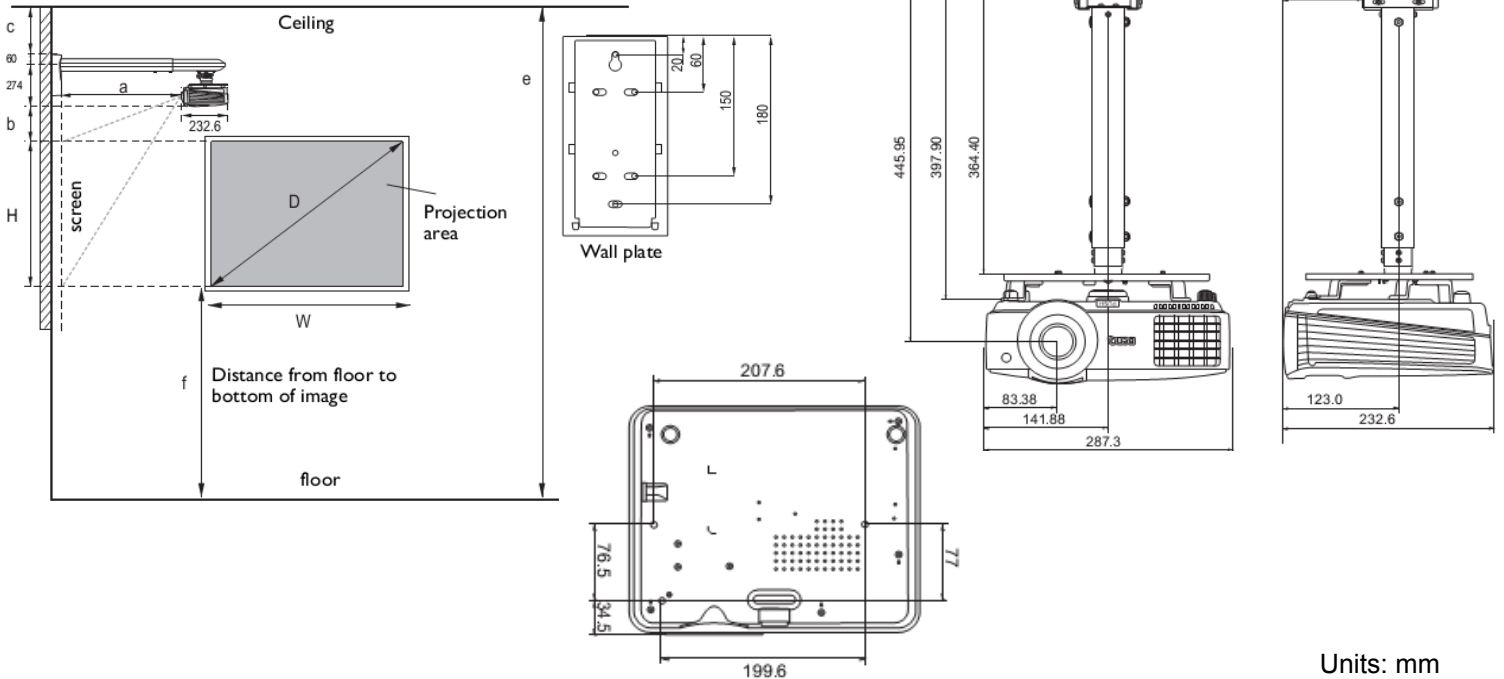

Dimensions

