




Features

- Native WXGA (1280x800) Resolution
- 5,000 ANSI Lumens, 7,500:1 High Contrast Ratio
- SmartEco™ Power Saving Technology
- Full 3D Ready and nVidia 3DTV Play
- Big Zoom Ratio: 1.5x, Corner and Surface Fit
- 2D Keystone, USB Reader & Display
- Full LAN Control & Display
- Wireless Display



Input and Output Terminals

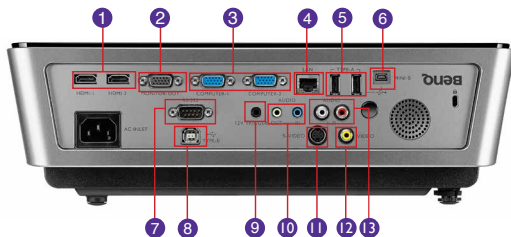

- | | |
|-----------------------------------|-------------------------------|
| 1 HDMI x2 | 8 USB (Type B) |
| 2 Monitor Out (D-sub 15pin) | 9 DC 12V Trigger |
| 3 Computer in 1 & 2 (D-sub 15pin) | 10 Audio in/Out (Mini Jack) |
| 4 LAN | 11 S-Video In (Mini DIN 4pin) |
| 5 USB (Type A) x2 | 12 Composite Video in (RCA) |
| 6 USB (Type Mini B) | 13 Audio In L & R (RCA) |
| 7 RS232 (DB-9pin) | |



Specifications

Projection System	DLP®
Native Resolution	WXGA(1280x800)
Brightness	5000 ANSI Lumen
Contrast Ratio	7500:1
Display Color	1.07 Billion Colors
Lens	F=2.42~2.97, f=20.7~31.05mm
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.447~2.17
Image Size (Diagonal)	26"~300"
Zoom Ratio	1.5x
Lamp Type	350W
Lamp (Normal/Economic Mode/SmartEco Mode)*	1500/3000/3800 hours
Keystone Adjustment	2D, V +/- 30 degree, H +/- 25 degree
Projection Offset	Vertical: 123%±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB = Reduced blanking
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM, 3D Compatibility: Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin) x 2 HDMI x 2 Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 5W x 1 LAN(RJ-45) x 1 USB (Type A) x 2 USB (Type B) x 1 USB (Type mini B) x 1 DC 12V Trigger (3.5mm Jack) x 1 RS232 (DB-9pin) x 1 IR Receiver x 2 (Front + Rear)
Dimensions (WxHxD)	360.1 x 119.9 x 259 mm
Weight	8.14 lbs (3.7 Kg)
Power Supply	AC100 to 240V, 3.8A, 50 to 60 Hz
Power Consumption	410W(Normal), 340W(Eco), Standby<0.5W
Audible Noise	42/35 dBA (Normal/Economic mode)
Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, QSG, Warranty Card, VGA Cable, Lens Cover, Carry Bag
Accessories (Optional)	Spare Lamp Kit P/N: 5J.J8805.001 Wireless Dongle (WDR8192) P/N: 5J.J3F28.A01 Ceiling Mount Kit P/N: 5J.J4N10.001 3D goggles P/N: 5J.J7L25.001
UPC / Part #	8400460-2891-6 / 9H.JA777.26A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2000 hours of lamp life.

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

SW916 06-16-14-BQca



BenQ Canada Corp.

Tel: (416) 363-2367

www.BenQ.ca

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders. Specifications subject to change without notice.




Because it matters

SW916 Digital Projector

Distance Chart

Ceiling Installation

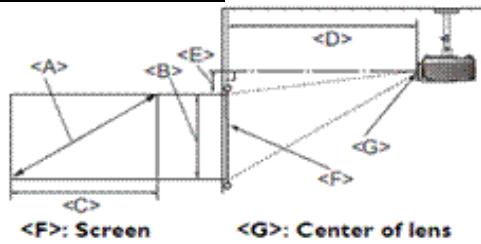

Floor Installation


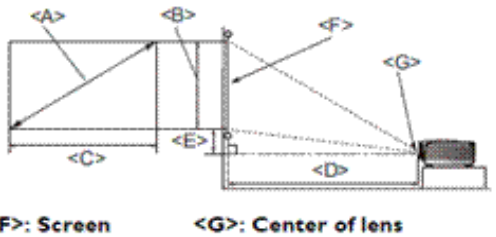


Image Size				Distance (mm)			Offset (mm) A (mm) @ Wide mode
Diagonal		Width (mm)	Height (mm)	Min distance	Average	Max distance	
Inch	mm						
50	1270	1077	673	1581	1972	2363	
60	1524	1292	808	1897	2367	2836	
70	1778	1508	942	2213	2761	3309	
80	2032	1723	1077	2529	3155	3781	
90	2286	1939	1212	2846	3550	4254	
100	2540	2154	1346	3162	3944	4727	
110	2794	2369	1481	3478	4339	5199	
120	3048	2585	1615	3794	4733	5672	
130	3302	2800	1750	4110	5128	6145	
140	3556	3015	1885	4426	5522	6617	
150	3810	3231	2019	4743	5916	7090	
160	4064	3446	2154	5059	6311	7563	
170	4318	3662	2289	5375	6705	8036	
180	4572	3877	2423	5691	7100	8508	
190	4826	4092	2558	6007	7494	8981	
200	5080	4308	2692	6323	7889	9454	
250	6350	5385	3365	7904	9861	11817	
300	7620	6462	4039	9485	11833	14180	

Ceiling Mount Chart

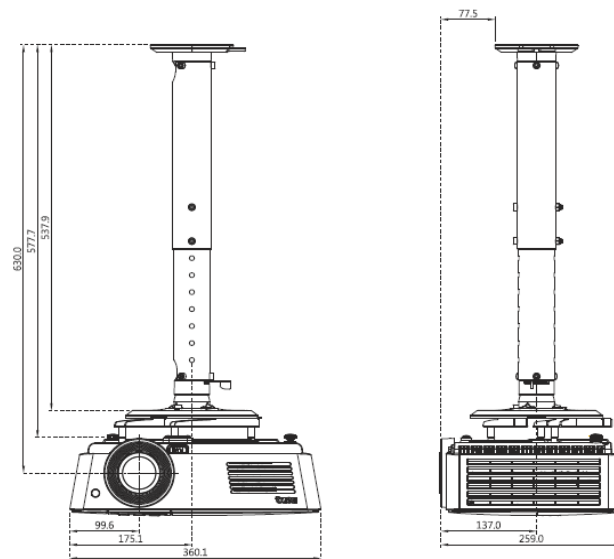

Units: mm

Dimensions



Units: mm



Because it matters