




| | |
|-----------------------------|-------------------------------|
| Model Name | DL550C Digital Signage |
| Unique selling point | |

- * Dual display simuntaneously
- * Slim & light than normal 2 sides display
- * PID operates 24/7, over 50,000 hrs
- * High mobility with 4 industrial wheels
- * Limited Cable Exposure – A easier look and feel

| | | | |
|--------------------|--------------------------------|---|----------------|
| Panel | Screen Diagonal | 55" | |
| | Backlight | LED | |
| | Resolution | FHD 1920 x 1080 (pixels) | |
| | Aspect Ratio | 16 : 9 | |
| | Brightness | 450 / 450 nits | |
| | Contrast Ratio | 3000:1 | |
| | Viewing Angle | 178 degree (H) / 178 degree (V) | |
| | Color gamut (x% NTSC) | 72% | |
| | Frame Rate | 60Hz | |
| | Response Time | 8ms | |
| | Panel bit | 8 bit, 16.7M | |
| | Light life | 50,000 hrs (typ.) | |
| Orientation | Portrait | | |
| Interface | Input/Output | Power (AC) In | x 1 |
| | | Audio line-in | N/A |
| | | Composite video In/ Out (BNC) | N/A |
| | | Composite audio In/ Out (RCA) | N/A |
| | | Component video (RCA) | N/A |
| | | External Speaker Out (L/R) | N/A |
| | | D-sub In/ Out | N/A |
| | | HDMI (Type A) in | x 2 |
| | | DVI-D In/ Out | N/A |
| | | DisplayPort Input | N/A |
| | | RJ45 | N/A |
| RS232 In/ Out | N/A | | |
| Others | AC power switch | x 1 (Bottom housing) | |
| Mechanical | Dimensions(W x H x D) | 2030.7x862.2x62.4 mm | |
| | Bezel Width (T/B/L/R) | 64.2/xx/87.0/87.0 mm | |
| | Weight (without packing) | 94.5 kg | |
| Power | Power supply | 100 V ~ 240 V, 50 Hz / 60 Hz | |
| | Power consumption | 230W (Typ.) | |
| OSD | On-Screen Display Languages | EN / ES / FR / DE / IT/ PT / RU /SC / JP /TC | |
| Software | Color Calibration | N/A | |
| | Multiple Display Control (MDA) | N/A | |
| Accessories | Standard | Remote Control w/ Battery | x 1 |
| | | Power Cord (by region) | x 3 (US/UK/EU) |
| | | Quick Start Guide | x 1 |
| | | HDMI Cables | x 2 |
| | | VGA(D-sub 15pin) Cable | N/A |
| | | Video wall installation pad (for gap inspection) | N/A |
| | | Stand | x 1 |
| | Optional | Edge Finishing Kits | N/A |
| | | Display PRO color meter (for Color Calibration SW) | N/A |
| | | | |

DL550C Digital Signage

Input/output terminals

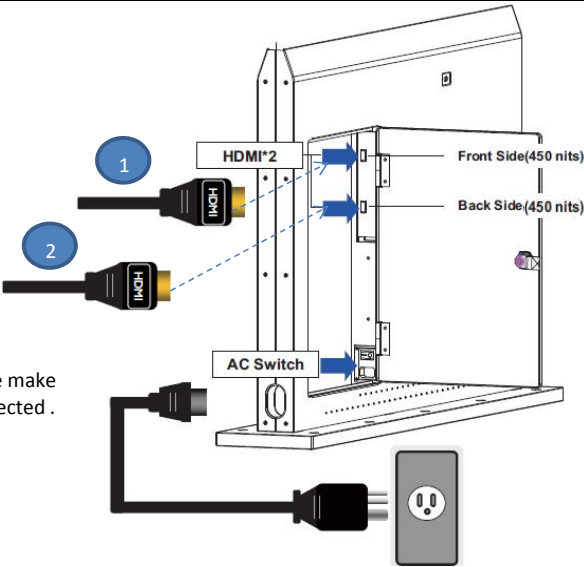

* Note:
Before connecting HDMI_2 , please make sure HDMI_1 is already well connected . Otherwise, there is no signal.

Dimension

