



Model Name MW724 Digital Projector **Distance Chart**

Unique selling point **Trade Mark**


- * SmartEco Power Saving technology
- * <0.5W standby mode
- * 2D keystone
- * Corner fit




Projection System	DLP	
Native Resolution	WXGA (1280x800)	
Brightness	3700 AL	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.41~2.78, f=15.76~21.11mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.1~1.5 (Wide 80"±3% @ 1.9m)	
Image Size (Diagonal)	60"~300"	
Zoom Ratio	1.36:1	
Lamp Type	240W	
Lamp(Normal/Economic/SmartEco Mode)*	3000/4000/7500 hours	
Keystone Adjustment	2D, Horizontal +/- 30 degrees, Vertical +/- 30 degrees	
Projection Offset	125%±5%	
Resolution Support	VGA(640 x 480) to WUXGA(1920 x 1200)*RB-Reduced blanking	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 1
	Audio in (RCA)	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	10W x 1
	Microphone (Mini Jack)	x 1
	USB (Type mini B)	x 1 (Download)
	USB (Type A)	x 1 (Charger)
	LAN (RJ45)	x 1
	RS232 (DB-9pin)	x 1
	IR Receiver	x 1
Dimensions	Dimensions(W x H x D)	327.3 x 136.7 x 232.8 mm
	Weight	3.0kg (6.6lbs)
Power	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption (typ.)	290W(Normal), 240W (Eco), network standby<6.0W, Standby<0.5W
	Power Management Function	Automatic power off after 20 minutes without a display source.
Audible Noise (typ.)	34/32dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
Accessories	Standard	Optional
	Lens Cover	Spare Lamp Kit
	Remote Control w/ Battery	Ceiling Mount
	Power Cord (by region)	3D Glasses
	User Manual CD	
	Quick Start Guide	
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	
	Carry bag	

MW724

Screen size			Distance from screen (mm)			Vertical offset (mm)	
Diagonal	W	H	Min length (max. zoom)	Average	Max length (min. zoom)		
40	1016	862	538	933	1107	1280	66
60	1524	1292	808	1416	1677	1937	102
80	2032	1723	1077	1900	2247	2595	135
100	2540	2154	1346	2384	2818	3252	168
120	3048	2585	1615	2867	3388	3909	201
150	3810	3231	2019	3593	4244	4895	251
200	5080	4308	2692	4802	5670	6538	335
250	6350	5385	3365	6011	7096	8181	422
300	7620	6462	4039	7220	8522	9827	505

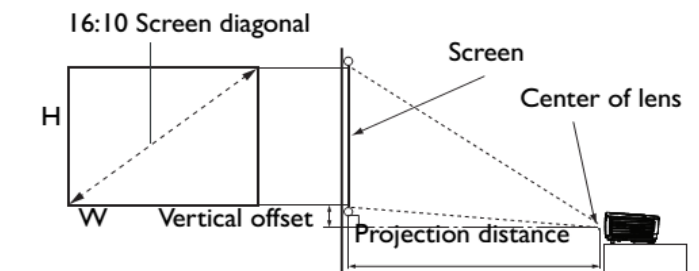

Wall mount/Ceiling mount Chart

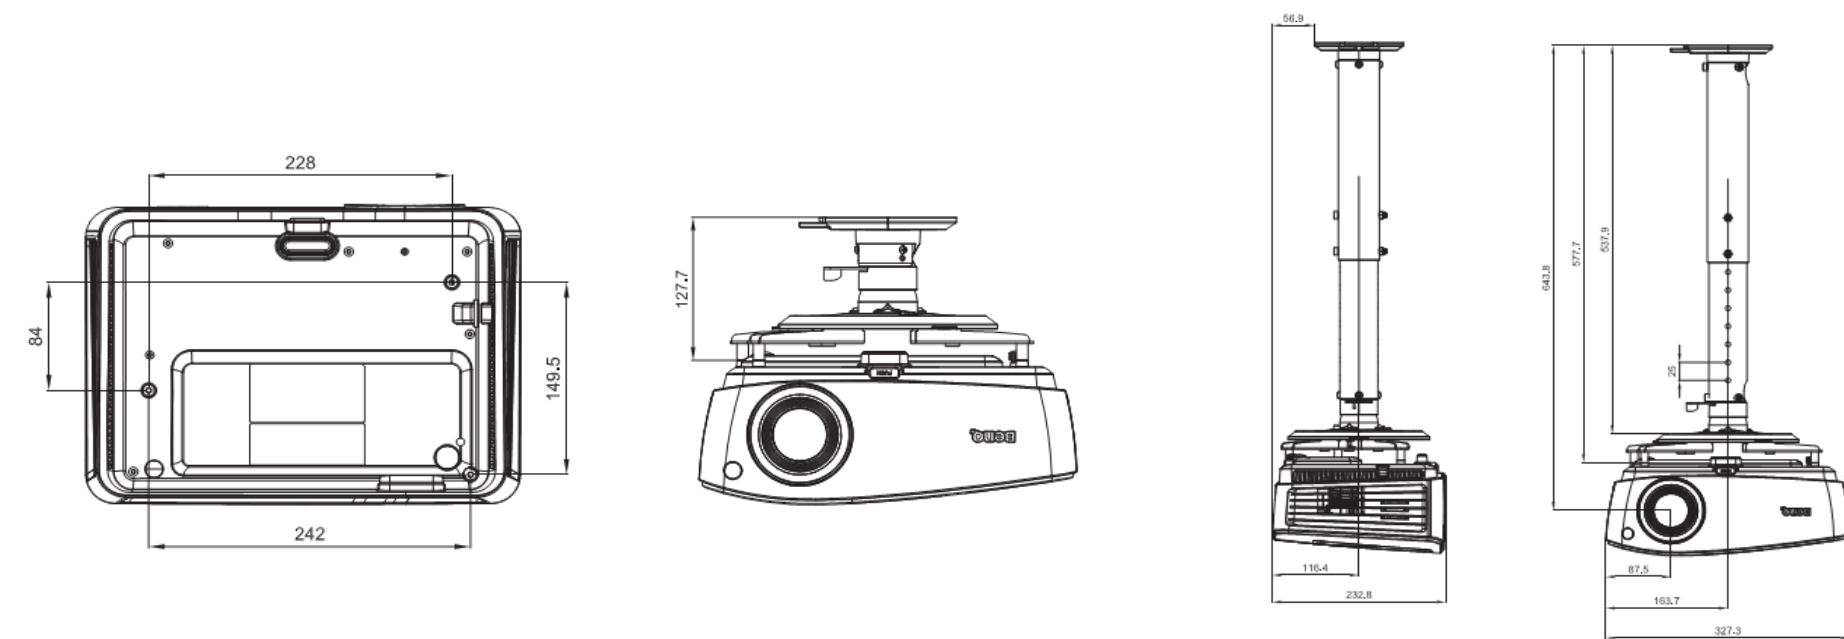

Dimension



*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.