



Model Name **MX661 Digital Projector**

Unique selling point

- * Designed for Corporate
- * Easy Installation & Control
- * Easy Maintenance
- * Wireless display by MX661 Qpresenter
- * SmartEco
- * 3D Display



Trade Mark

Projection System	DLP
Native Resolution	XGA(1024x768)
Brightness	3000AL
Contrast Ratio	13000:1
Display Color	1.07 Billion Colors
Lens	F=2.51-2.69, f=21.95-24.18mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.97-2.17 (50"@2m)
Image Size (Diagonal)	37"-300"
Zoom Ratio	1.1:1
Lamp Type	210W
Lamp(Normal/Economic/SmartEco Mode)*	3500/5000/6500 hours
Keystone Adjustment	1D, Vertical +/- 40 degrees
Projection Offset	130% ±5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	27K~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM 3D Compatibility Refer 3D Compatibility control table

Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	HDMI (1.4a)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Microphone in (Mini Jack)	x 1
	Speaker	2W x 1
	LAN (RJ45)	x 1 (LAN Control & LAN Display)
	USB (Type A)	x 1 (USB Reader with Office viewer & Wireless Display)
	USB (Type B)	x 1 (Download & Page up/down)
	USB (Type mini B)	x 1 (USB Display & Download)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 1 (Front)

Dimensions	Dimensions(W x H x D)	327.4 x 126 x 230.1mm
	Weight	2.6kg

Power	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	265W(typical), Standby<0.5W

Audible Noise	34/32 dBA (Normal/Economic mode)
----------------------	----------------------------------

On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
------------------------------------	--


Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2
----------------------	--

Accessories	Standard	Optional	
	Carry bag	Spare Lamp Kit	P/N: 5J8F05.001
	Remote Control w/ Battery	Ceiling Mount	P/N: 5J4N10.001
	Power Cord (by region)	3D Glasses	P/N: 5J7K25.001
	User Manual CD (24L)		
	Quick Start Guide (18L)		
	Warranty Card (by region)		
	VGA(D-sub 15pin) Cable		

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

MX661 Digital Projector


Distance Chart

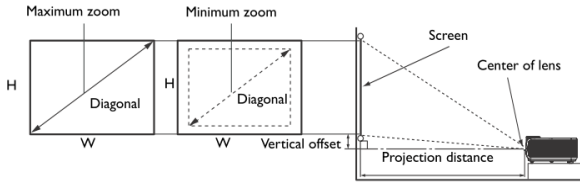

Screen size		Projection distance (mm)			Vertical offset (mm)		
Diagonal	W (mm)	H (mm)	Min distance	Average		Max distance	
			(max. zoom)			(min. zoom)	
30	762	610	457	1200	1260	1320	69
40	1016	813	610	1600	1680	1760	91
50	1270	1016	762	2000	2100	2200	114
60	1524	1219	914	2400	2520	2640	137
80	2032	1626	1219	3200	3360	3520	183
100	2540	2032	1524	4000	4200	4400	229
120	3048	2438	1829	4800	5040	5280	274
150	3810	3048	2286	6000	6300	6600	343
200	5080	4064	3048	8000	8400	8800	457
220	5588	4470	3353	8800	9240	9680	503
250	6350	5080	3810	10000	10500	11000	572
300	7620	6096	4572	12000	12600	13200	686

Wall mount/Ceiling mount Chart

326.5 mm (W) x 126.0 mm (H) x 230.1 mm (D)

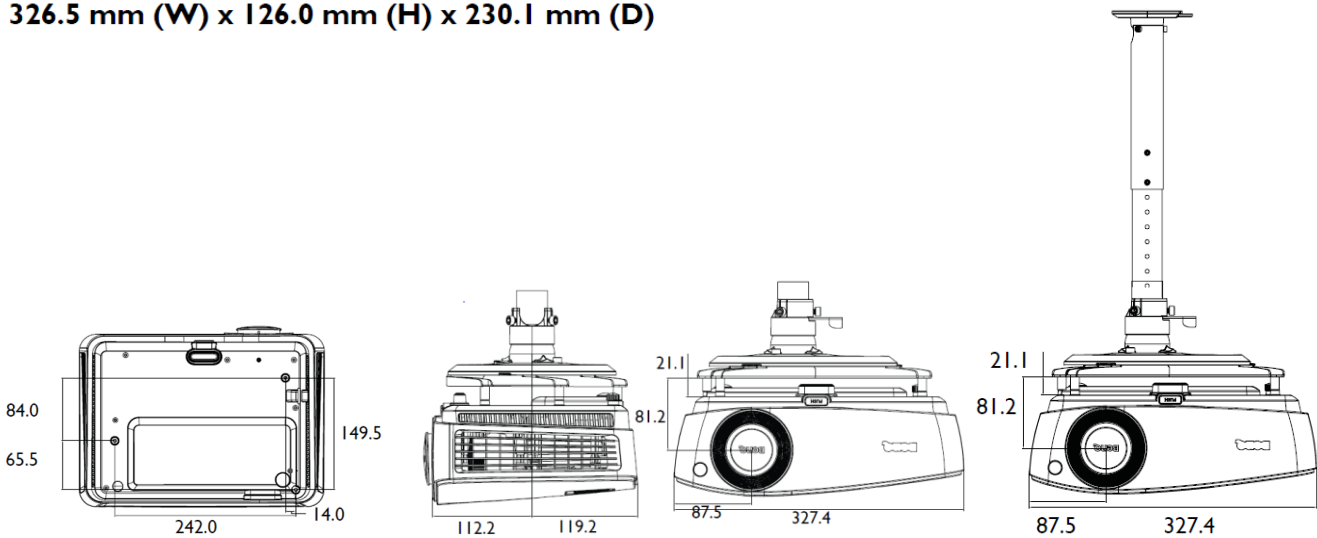

Dimension

