

SW916 Digital Projector



Features

- 5000 ANSI Lumen High Brightness
- Big zoom ratio: 1.5x
- Corner Fit and Surface Fit
- Blu-ray Full HD 3D support
- SmartEco

Box Contents

- Carry bag
- Remote Control w Battery
- User Manual CD
- Lens Cover
- Power Cord (by region)
- VGA cable
- Quick Start Guide
- Warranty Card (by region)

Dimension




Optional Accessories

- Spare Lamp Kit
- Ceiling mount kit
- Carry bag



Because it matters

Input and Output Terminals

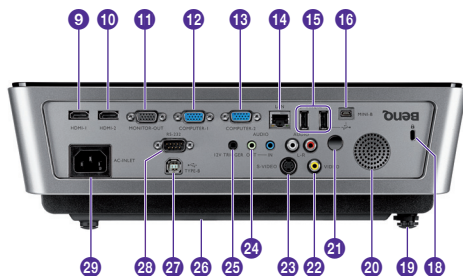

- 1 HDMI 1 input jack
- 2 HDMI 2 input jack
- 3 RGB signal output jack
- 4 COMPUTER-1 input jack
- 5 COMPUTER-2 input jack
- 6 RJ45 LAN input jack
- 7 Audio (L/R) input jack
- 8 USB Type-A ports
- 9 USB Mini-B port
- 10 Kensington anti-theft lock slot
- 11 Rear adjuster foot
- 12 Audio speaker
- 13 Rear IR remote sensor
- 14 VIDEO input jack
- 15 S-VIDEO input jack
- 16 Audio input/output jack
- 17 12V TRIGGER
- 18 Quick-release foot
- 19 USB Type B port
- 20 RS-232 control port
- 21 AC power cord inlet

Product Specifications

Projection System	DLP	
Native Resolution	WXGA(1280x800)	
Brightness	5000 ANSI Lumen	
Contrast Ratio	7500:1	
Display Color	1.07 Billion Colors	
Lens	F=2.42~2.97, f=20.7~31.05mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.447~2.17	
Image Size (Diagonal)	26"~300"	
Zoom Ratio	1.5x	
Lamp Type	350W	
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	1500/3000/3800 hours	
Keystone Adjustment	2D,V +/- 30 degree, H +/- 25 degree	
Projection Offset	Vertical: 123%±5%	
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)*RB = Reduced blanking	
Horizontal Frequency	15K-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility Video Compatibility 3D Compatibility (Please refer to User Manual for detailed support timing.)	480i, 480p, 576i, 576p, 720p, 1080i, 1080p NTSC, PAL, SECAM Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin) HDMI Monitor out Composite Video in (RCA) S-Video in Audio in (Mini Jack) Audio in (L/R) Audio out (Mini Jack) Speaker LAN(RJ-45) USB (Type B) USB (Type A) USB (Type mini B) DC 12V Trigger (3.5mm Jack) RS232 (DB-9pin) IR Receiver	x 2 x 2 x 1 x 1 x 1 x 1 x 1 x 1 5W x 1 x 1 x 1 x 2 x 1 x 1 x 1 x 1 x 2 (Front+Rear)
Dimensions	Dimensions(W x H x D) Weight	360.1x119.9x259mm (include feet) 360.1x114.8x259mm (exclude) 8.14 lbs (3.7 Kg)
Power	Power Supply Power Consumption	AC100 to 240V, 4.5A, 50 to 60 Hz 410W(Normal), 340W(Eco), Standby<0.5W
Audible Noise	42/35 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2	

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9H.JA777.26E
EAN Code	471 8755 04781 7
Dimensions Single Carton (cm)	40.9 x 25.90 x 38.40
Carton Weight (kg)	6,7
Pallet Size Block (cm)	120 x 100 x 127.20



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2015 BenQ Corp. Specification may vary by region, please visit your local stores for details.
Actual product's features and specifications are subject to change without notice.
This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301

