

W1070+W Home Projector



Features

- Uncompressed Full HD wireless transmission
- 100" Big Picture at 2.5 Meters
- Vertical Lens Shift Adjustment
- Horizontal-Vertical keystone adjustment
- 6-Segment Color Wheel with 6X Speed
- Plug-and-Play Mobile Entertainment with MHL

Box Contents

- Remote Control w/ Battery
- Power Cord (by region)
- User Manual CD
- Quick Start Guide
- Lens cover
- Wireless Full HD Kit

Dimension




Optional Accessories

- Spare Lamp Kit: 5J.J9H05.001
- Ceiling Mount: 5J.JAM10.001
- 3D Glasses: 5J.J9H25.001
- Carry Bag: 5J.J3T09.001



Because it matters

Input and Output Terminals

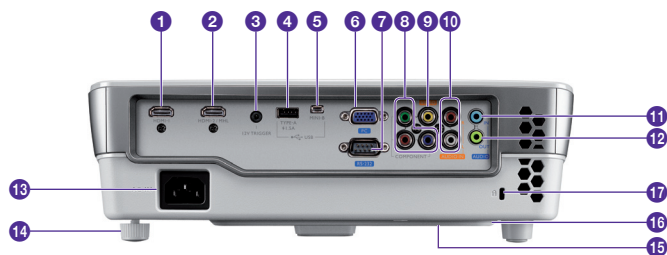

- 1 HDMI input port
- 2 MHL/HDMI dual mode port
Also can be used for charging the connected MHL compatible smart device as long as the power is fed to the projector.
- 3 I2VDC output terminal
Used to trigger external devices such as an electric screen or light control, etc. Consult your dealer for how to connect these devices.
- 4 USB Type-A port
Used for charging the receiver box of the Wireless FHD Kit (WDP01) (optional accessory).
- 5 Mini USB port
Used for service.
- 6 RGB (PC)/Component video (YPbPr/YCbCr) signal input jack
- 7 RS-232 control port
Used to interface with a PC or home theater control/automation system.
- 8 Component Video inputs (RCA) support Y/PB/PR or Y/CB/CR video signal
- 9 Video input jack
- 10 Audio (L/R) input jacks
- 11 Audio input jack
- 12 Audio output jack
- 13 AC Power cable inlet
- 14 Rear adjuster foot
- 15 Ceiling mount holes
- 16 Wireless FHD Kit mount holes
- 17 Kensington lock slot

Product Specifications

Projection System	DLP
Native Resolution	1080p (1920 x 1080)
Brightness	2200 ANSI Lumen
Contrast Ratio	10000:1
Display Color	1.07 Billion Colors
Lens	F=2.59-2.87, f=16.88-21.88mm
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Throw Ratio	1.15-1.5 (100" @ 2.5M)
Image Size (Diagonal)	40"-235"
Zoom Ratio	1.3:1
Lamp Type	240W
Lamp(Normal/Economic/SmartEco Mode)*	3500/5000/6000 hours
Keystone Adjustment	2D, Vertical & Horizontal +/- 30 degrees
Projection Offset / Lens Shift	Vertical 110%-130%±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB=Reduced blanking
Horizontal Frequency	31K~102KHz
Vertical Scan Rate	23-120Hz
Compatibility	SDTV, EDTV, HDTV Compatibility Video Compatibility 480i, 480p, 576i, 567p, 720p, 1080i, 1080p NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) HDMI MHL Composite Video in (RCA) Component Video in Audio in (Mini Jack) Audio L/R in (RCA) Audio out (Mini Jack) Chamber Speaker USB (Type A) USB (Type Mini B) RS232 (DB-9pin) DC 12V Trigger
Dimensions	Dimensions(W x H x D) Weight
Power	Power Supply Power Consumption
Audible Noise	31/28 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics Information

Product Code	9H.J9H77.17G
EAN Code	471 8755 05628 4
Dimensions Single Carton (cm)	54.6 * 19.4 * 35.3
Carton Weight (kg)	6,35
Pallet Qty	30



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details.
Actual product's features and specifications are subject to change without notice.
This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301

