

Model Name

MW769 Projector

Unique selling point

* 4200ANSI Lumen High Brightness

- * I3000:I High Contrast Ratio * Blu-ray Full HD 3D support
- * Big zoom ratio: 1.5x
- * SmartEco



Trade Mark







Smarteco			3DTV PLAY					
	Din							
Projection System	DLP							
Native Resolution	WXGA(1280x800)							
Brightness	4200 ANSI Lumen							
Contrast Ratio	13000:1							
Display Color	1.07 Billion Colors							
Lens	F=2.42~2.97, f=20.7~31.05mm							
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)							
Throw Ratio	1.45~2.17							
Image Size (Diagonal)	31" ~ 300"							
Zoom Ratio	1.5x							
Lamp Type	310W							
Lamp(Normal/Economic/SmartEco Mode)*	2500/3000/3500 hours							
Keystone Adjustment	2D, V +/- 30 degree, H +/- 25 degree							
Projection Offset	Vertical: 125% ±5%							
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)							
Horizontal Frequency	15K-102KHz							
Vertical Scan Rate	23-120Hz							
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p							
	Video Compatibility	/ideo Compatibility NTSC, PAL, SECAM						
	3D Compatibility	Frame Sequential: Up to 60Hz 7	•					
	(Please refer to User Manual	Frame Packing: Up to 24 Hz 108	•					
	for detailed support timing.)	Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p						
		TOP BOLLOTTI. OP LO BOFIZ TOBOL						
Interface	Computer in (D-sub 15pin)		x 2					
	HDMI		x 2					
	Monitor out		хI					
	Composite Video in (RCA)		хI					
	S-Video in		хI					
	Audio in (Mini Jack)		хI					
	Audio in (L/R)		xl					
	Microphone in(Mini jack)		x l					
	Audio out (Mini Jack)		x l					
	Speaker		20W x I					
	LAN(RJ-45)		xl					
	USB (Type A)		x 2					
	USB (Type B)		x l					
	USB (Type Mini B)		x l					
	DC 12V Trigger (3.5mm Jack))	x I					
	RS232 (DB-9pin)		x I					
	IR Receiver		x2 (Front+Rear)					
Dimensions	$Dimensions(W \times H \times D)$		329x137.2x248.7mm (include feet)					
	\\/oight		329x127.2x248.7mm (exclude feet)					
_	Weight		8.6 lbs(3.9 Kg)					
Power	Power Supply		AC100 to 240V, 4.2A, 50 to 60 Hz					
	Power Consumption		400W(Normal), 340W(Eco), Standby<0.5W					
Audible Noise	36/34 dBA (Normal/Economi	•						
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/							
	Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Tradition							
	Chinese (28 Languages)							
Picture Modes	Dynamic / Presentation / sRG	Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2						
Accessories	Standard		ptional					
	Carry bag	Power Cord (by region)	Spare Lamp Kit					
	Remote Control w Battery	VGA cable	Ceiling mount kit					
	User Manual CD	QSG						


Warranty Card (by region)

Lens Cover

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


MW769 Projector

Distance Chart




Screen size			Distance	Vertical offset			
Diag	onal	W	Н	Min length	Average	Max length	(mm)
Inch	mm	(mm)	(mm)	(max. zoom)	Average	(min. zoom)	
30	762	646	404	937	1170	1402	50
40	1016	862	538	1249	1559	1870	67
60	1524	1292	808	1874	2339	2804	101
80	2032	1723	1077	2499	3119	3739	135
100	2540	2154	1346	3123	3899	4674	168
150	3810	3231	2019	4685	5848	7011	252
200	5080	4308	2692	6246	7797	9348	337
250	6350	5385	3365	7808	9746	11685	421

Ceiling mount Chart

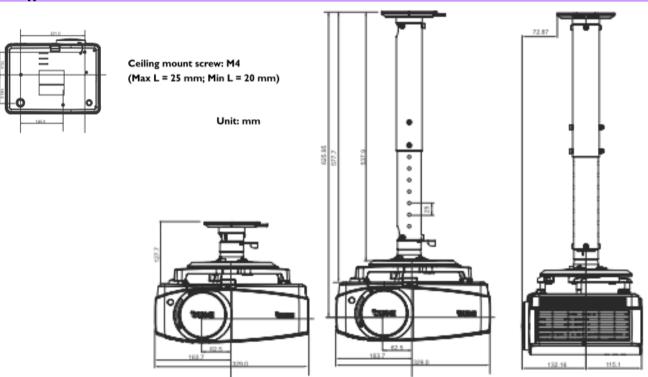

Dimension







Unit: mm