



Model Name **SW92I Digital Projector** Distance Chart

Unique selling point

- * High brightness 5000AL
- * Big Zoom 1.6X
- * Easy installation and control
- * Vertical Lens Shift

Projection System	DLP
Native Resolution	WXGA (1280 x 800)
Brightness	5,000AL
Contrast Ratio	5,000:1
Display Color	1.07 Billion Colors
Lens	F=2.45~3.07, f=15.78 ~ 25.12
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.12~1.8
Clear Image Size	60"~240"
Zoom Ratio	1.6X
Lamp Type	370W
Lamp(Normal/Economic/SmartEco Mode)*	2000/2500 hours
Keystone Adjustment	2D, Vertical & Horizontal ± 30 degrees
Projection Offset	105% ±2.5%
Lens Shift	Vertical: +2.5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15K~102KHz
Vertical Scan Rate	24~120Hz
Compatibility	HDTV Compatibility 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility NTSC, PAL, SECAM

Interface	Computer in (D-sub 15pin) x 1 (Share with component)
	Monitor out (D-sub 15pin) x 1
	Composite Video in (RCA) x 1
	S-Video in (Mini DIN 4pin) x 1
	HDMI x 2
	Audio in (Mini Jack) x 1
	Audio L/R in (RCA) x 1
	Audio out (Mini Jack) x 1
	Speaker 10W x 2
	LAN (RJ45) x 1 (LAN control)
	USB (Type B) x1 (Download)
	RS232 (DB-9pin) x 1
	IR Receiver x 2

Dimensions	Dimensions(W x H x D) 411.4x118.4x267.5 mm
	Weight 4.9KG

Power	Power Supply AC100 to 240 V, 50 to 60 Hz
	Power Consumption Typical 490W, Network standby <6W, Standby power <0.5W
	Power Management Function Automatic power off after 20 minutes without a display source.

Audible Noise	36/33 dBA (Normal/Economic mode)
----------------------	----------------------------------


On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
------------------------------------	--

Picture Modes**	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2
------------------------	--


Accessories	Standard	Optional
	Remote Control w/ Battery	Presentation Plus P/N: 65J9306.002
	Power Cord (by region)	Spare Lamp Kit P/N: 5JJDP05.001
	User Manual CD	Ceiling Mount P/N: 5JJAM10.001
	Quick Start Guide	3D Glasses P/N: 5JJ9H25.001
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	

Diagonal <A> [inch (mm)]	Height [cm]	Width <C> [cm]	Projection distance <D> [cm]			Lowest/ Highest lens position <E> [cm]
			Min distance	Average	Max distance	
60 (1524)	81	129	145	189	233	6.1
70 (1778)	94	151	169	221	272	7.1
80 (2032)	108	172	193	252	311	8.1
90 (2286)	121	194	218	283	349	9.1
100 (2540)	135	215	242	315	388	10.1
110 (2794)	148	237	266	346	427	11.1
120 (3048)	162	259	290	378	466	12.1
130 (3302)	175	279	314	409	504	13.1
140 (3556)	189	302	338	441	543	14.1
150 (3810)	202	323	362	472	582	15.1
160 (4064)	215	345	386	504	621	16.2
170 (4318)	229	366	411	535	660	17.2
180 (4572)	242	388	435	566	698	18.2
190 (4826)	256	409	459	598	737	19.2
200 (5080)	269	431	483	629	776	20.2
240 (6096)	323	517	579	755	931	24.2


Floor Installation

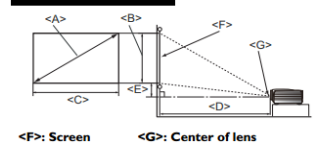


Ceiling Installation

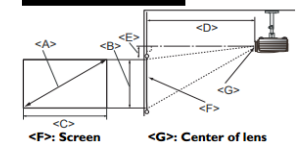

Wall mount/Ceiling mount Chart

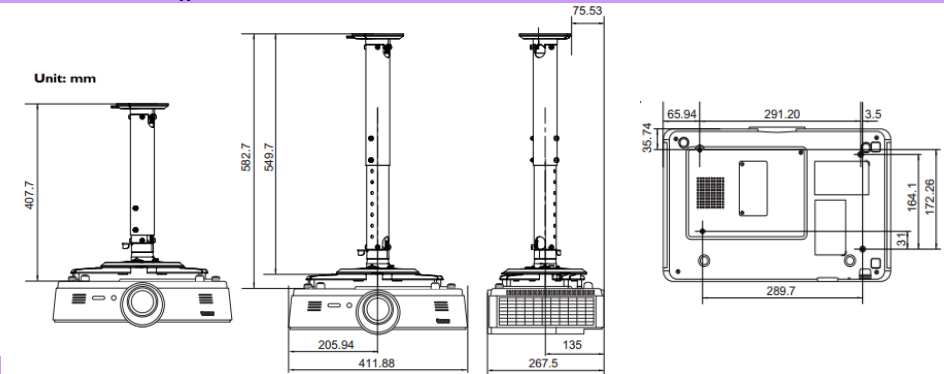

Dimension

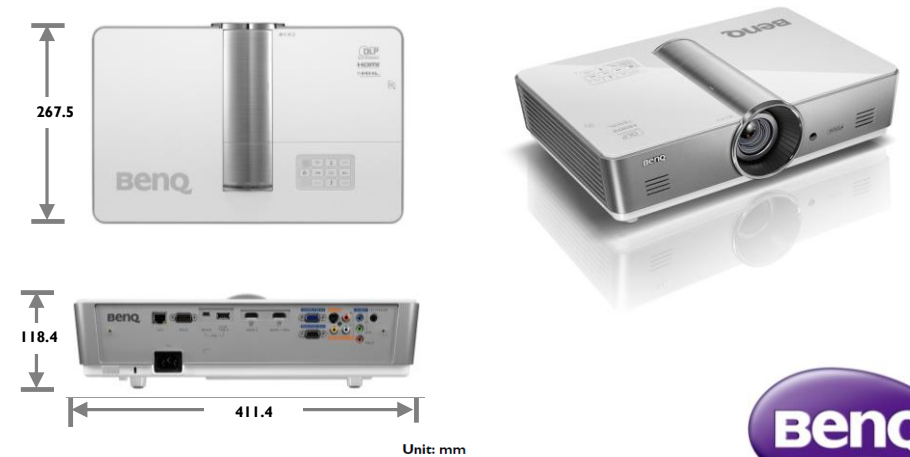

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.