


Data sheet

BenQ GC2870H

71.12 cm / 28" VA LED-Display

- LED-backlight
- incl. 85 % Color Saturation
- Response time 5 ms (GtG)
- Flicker Free / Low Blue Light

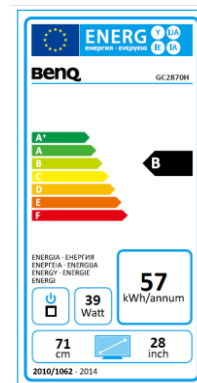

	Model : GC2870H
	Art. No. / EAN Code : 9H.LEKLA.TBE / 471 8755 06323 7
	Type : 71.12 cm / 28" Wide TFT, (AMVA+ Panel)
Panel	Resolution : 1920x1080 / 16:9
	Pixel Pitch : 0.320 mm
	Picture diagonal / -area (w x h) : 711,2 / 621 x 341 mm
	Max. Colors : 16.7 Million
	Viewing Angle H/V (CR>=10) : 178°/ 178°
	Contrast (static) : 3000:1
	Contrast (dynamic) : 20 million:1
	Brightness : 300 cd/m ²
	Response Time : 5 ms (GtG)
Connection:	HDMI Connector : 2 x HDMI
	VGA Connector : RGB analog
	Headphone Jack : Yes
	Frequency H/V : 30-83 KHz / 50-76 Hz
	Card reader : SD/SDHC/SDXC
Control	Controls : On/Off power button, 5 OSD buttons
	Functions : contrast, brightness, sharpness, vertical and horizontal picture, phase, pixel clock, 1 user 3 pre-settings color temperature, 17 languages, OSD (position, time), input, reset, information
Extra	Special : Flicker Free / Low Blue Light
	Protection : Kensington Lock
	Mounting : Vesa 100 x 100 mm
	Swivel : -45°/+45° left/right
	Tilt : -5° / +20°
Energy	Power Supply : internal
	Voltage for operation : 90 ~ 264 VAC / 47 ~ 63 Hz
	Power consumption (Base on Energy star) : < 27 W
	(Sleep Mode) : 0.3 W
Certification	Safety : CE
	TCO / Energy Star : 6.0 / 6.0
Environment	Operation : + 5 ~ +40°C; 20 ~ 90% air humidity
	Storage : -20 ~ +60°C; 10 ~ 90% air humidity
Characteristic	Weight net : 5.5 kg
	Housing Color : Black
	Dimension with base (H x W x D) : 477 x 659 x 204 mm
	Accessories : Power-, VGA-, HDMI cable
	Warranty Terms : 3 years on-site exchange

