



Model Name **W750 Digital Projector**

Unique selling point **Trade Mark**

- * Ideal for Home Entertainment
- * 3D Display
- * Easy Setup and Maintenance




Projection System	DLP		
Native Resolution	720p (1280 x 720)		
Brightness	2200AL		
Contrast Ratio	13000:1		
Display Color	1.07 Billion Colors		
Lens	F=2.54-2.73, f=18.18-21.84mm		
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)		
Throw Ratio	1.31-1.57 (60"@2M)		
Image Size (Diagonal)	35"~300"		
Zoom Ratio	1.2:1		
Lamp Type	210W		
Lamp(Normal/Economic/SmartEco Mode)*	4000/5000/6500 hours		
Keystone Adjustment	1D, Vertical +/- 40 degrees		
Projection Offset	120% ±5%		
Resolution Support	Up to UXGA(1600 x 1200)		
Horizontal Frequency	15K~102KHz		
Vertical Scan Rate	23~120Hz		
Compatibility	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p	
	Video Compatibility	NTSC, PAL, SECAM, SDTV	
Interface	Computer in (D-sub 15pin)	x 1	
	HDMI	x 2	
	Composite Video in (RCA)	x 1	
	S-Video in (Mini DIN 4pin)	x 1	
	Component Video in	x 1	
	Audio in (Mini Jack)	x 1	
	Audio L/R in (RCA)	x 1	
	Audio out (Mini Jack)	x 1	
	Speaker	10W x 1	
	USB (Type B)	x1 (Download & page/down)	
	RS232 (DB-9pin)	x 1	
	IR Receiver	x2	
Dimensions	Dimensions(W x H x D)	287.3 x 114.4 x 232.6 mm	
	Weight	2.9 kg	
Power	Power Supply	AC 100 to 240 V, 50/60 Hz	
	Power Consumption	323W (typical), Standby< 0.5W	
Audible Noise	31/27 dBA (Normal/Economic mode)		
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)		
Picture Modes	Dynamic/Standard/Cinema/3D/User 1/User 2/User 3/ISF Night/ISF Day		
Accessories	Standard	Optional	
	Carry Bag	Spare Lamp Kit	P/N: 5Jj7K05.001
	Remote Control w/ Battery	Ceiling Mount	P/N: 5Jj2K01.001
	Power Cord (by region)	3D Glasses	P/N: 5Jj7K25.011
	User Manual CD		
	Quick Start Guide		
	Warranty Card (by region)		
	VGA (D-sub 15pin) Cable		

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

W750 Digital Projector

Distance Chart


TBD

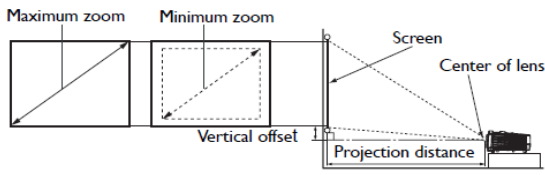

Screen size				Distance from screen (mm)			Vertical offset (mm)
Diagonal	W	H	Min length	Average	Max length		
Inch	mm	(mm)	(mm)	(max. zoom)		(min. zoom)	
30	762	646	403	1018	1127	1235	61
40	1016	861	538	1273	1420	1567	83
50	1270	1077	673	1564	1731	1897	105
60	1524	1292	807	1871	2047	2223	126
80	2032	1723	1077	2435	2658	2881	164
100	2540	2153	1346	3014	3276	3538	205
120	3048	2584	1615	3594	3894	4194	251
150	3810	3230	2019	4465	4823	5180	313
200	5080	4307	2692	5916	6369	6822	416
220	5588	4738	2961	6496	6987	7478	457
250	6350	5384	3365	7367	7916	8464	521
300	7620	6461	4038	8818	9462	10106	624

Wall mount/Ceiling mount Chart

TBD

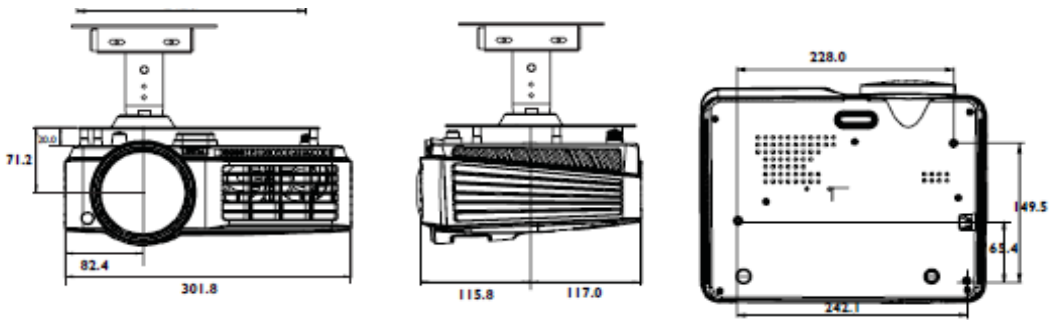

Dimension

TBD

