

Model Name

MH856UST Digital Projector

Unique selling point

Trade Mark

- st Ultra short throw with 1080p image quality
- * Dual HDMI port. Support MHL.
- * Optional PointWrite interactive capability
- * Cornor fit adjustment
- * Wall mount bundle







Projection System	DLP				
Native Resolution	1080 _P (1920*1080)				
Brightness	3500AL				
Contrast Ratio	10,000:1				
Display Color	1.07 Billion Colors				
Lens	F2.5,f=5.1 mm				
Aspect Ratio	Native 16:9 (6 aspect ratio select	able)			
Throw Ratio	0.33				
Clear Image Size/Max Image size	88.9"~110/300"				
Zoom Ratio	Fix				
Lamp Туре	280W				
Lamp(Normal/Economic/SmartEco Mode)*	3000/4000/7000 hours				
Keystone Adjustment	2D, Vertical/Horizontal +/- 30 de	grees			
Projection Offset	I50%(±5%)				
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)				
Horizontal Frequency	15~102KHz				
Vertical Scan Rate	23~120Hz				
Compatibility	HDTV Compatibility	480i, 480p, 57	76i, 576p, 720p, 1080i, 1080p		
	Video Compatibility	NTSC, PAL, S	ECAM		
Interface	Computer in (D-sub 15pin)		x 2(Shared with component)		
	Monitor out (D-sub 15pin)		хI		
	Composite Video in (RCA)		x I		
	S-Video in (Mini DIN 4pin)	хI			
	HDMI/MHL		x 2(HDMI I with MHL)		
	Audio in (Mini Jack)				
	Audio out (Mini Jack)		x I		
	Audio L/R		x I		
	Speaker		10W x 2		
	USB (Type mini B)		x I (PointWrite interactive module)		
	USB (Type B)		×I (FW download)		
	USB(Type A)		xI (5V 2A Power for PT02 Touch module)		
	RJ45		xI (LAN control)		
	RS232 (DB-9pin)		хI		
	IR Receiver	IR Receiver		xI (Front)	
			373.3*287.5*130.2mm (w	/o Mirror)	
Dimensions	Dimensions(W \times H \times D)	Dimensions(W x H x D)		373.3*287.5*201mm(w Mirror)	
	Weight		5KG(w/o wall mount)		
Power	Power Supply		AC100 to 240 V, 50 to 60 Hz		
	Power Consumption		typical 380W, stanby power <0.5W		
Audible Noise	37/33 dBA (Normal/Economic m	ode)			
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)				
Accessories	Standard		Optional		
	Remote Control w/ Battery	RCS011	Spare Lamp Kit		
	Power Cord (by region)	2.9M	Wall Mount	WM04G4	
	User Manual CD	*	3D Glasses	DGD24	
	Quick Start Guide	*	Document Camera	\$30	
	Warranty Card (by region)	*	PointWrite kit	PW01U	
	VGA(D-sub 15pin) Cable	*	PointWrite Touch module		

^{*}Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


Wall mount kit (installation guide)

MH856UST Digital Projector


Distance Chart

MH856UST The screen aspect ratio is 16:9 and the projected picture is 16:9.


tween
tween
te & screen



Wall mount/Ceiling mount Chart

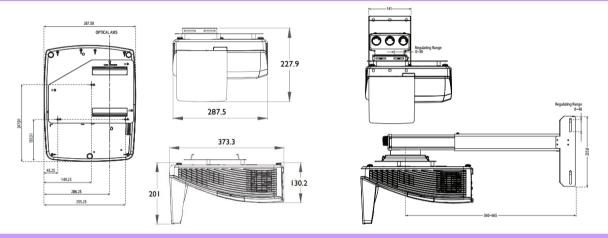

Dimension

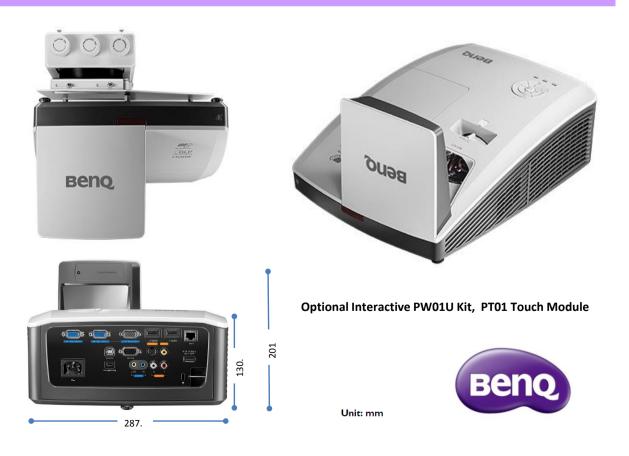



BenQ Scalable Interaactive System

BenQ PointWrite interactive projectors turn any surface into an interactive whiteboard by utilizing an innovative infrared technology to detect transmitter light emitted from the PointWrite Pen or touch module that enable the camera to detect the finger or object movements. This allows teachers to invite students up to the board to make notes, answer questions, or collaborate on digital paintings, sparking creativity, imagination and lots of fun. Easy to set up and flexible to use, these education projectors make a cost-efficient and affordable option for every classroom.

Key features

- Compatible with series BenQ short throw and ultra-short throw projector
- Supports up to 4 pens/fingers
- Dual screen tuoch for ultra wide working space.
- Effortless setup with only I second auto calibration*
- An ultra-fast 0.016-second response time for a smooth writing experienc
 *Calibration speed may vary depending on computer system.



PW01U Kit

Scalable dual screen and finger touch

Beno

PT01 touch module



