



Model Name MX723 Digital Projector **Distance Chart**

Unique selling point


- * SmartEco Power Saving technology
- * <0.5W standby mode
- * 2D keystone
- * Corner fit

Trade Mark




Projection System	DLP	
Native Resolution	XGA (1024 x 768)	
Brightness	3700 AL	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.5-3.12, f=16-25.46mm	
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)	
Throw Ratio	1.4-2.3 (Wide 60°±3% @ 1.7m)	
Image Size (Diagonal)	60"-300"	
Zoom Ratio	1.6:1	
Lamp Type	260W	
Lamp (Normal/Economic/SmartEco Mode)*	2000/3500/5000 hours	
Keystone Adjustment	2D, Horizontal +/- 30 degrees, Vertical +/- 30 degrees	
Projection Offset	130%±5%	
Resolution Support	VGA(640 x 480) to WUXGA(1920 x 1200)*RB-Reduced blanking	
Horizontal Frequency	15-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x1
	Audio in (RCA)	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	10W x 1
	Microphone (Mini Jack)	x 1
	USB (Type mini B)	x1 (Download)
	USB (Type A)	x1 (Charger)
	LAN (RJ45)	x 1
	RS232 (DB-9pin)	x 1
	IR Receiver	x1
Dimensions	Dimensions(W x H x D)	327.3 x 136.7 x 232.8 mm
	Weight	2.6kg (5.73lbs)
Power	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption (typical)	210W (normal), 220W (eco), network standby $\leq 0.5W$
	Power Management Function	SmartEco™ Automatic power off after 20 minutes without a display source.
Audible Noise		35/33 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
Accessories	Standard	Optional
	Lens Cover	Spare Lamp Kit
	Remote Control w/ Battery	Ceiling Mount
	Power Cord (by region)	3D Glasses
	User Manual CD	
	Quick Start Guide	
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	
	Carry bag	

Screen size	Screen size			Distance from screen (mm)			Vertical offset (mm)
	Diagonal	W	H	Min length (max. zoom)	Average	Max length (min. zoom)	
40	1016	813	610	1138	1544	1951	91
60	1524	1219	914	1707	2316	2926	137
80	2032	1626	1219	2276	3089	3901	183
100	2540	2032	1524	2845	3861	4877	229
120	3048	2438	1829	3414	4633	5852	274
150	3810	3048	2286	4267	5791	7315	343
200	5080	4064	3048	5690	7722	9754	457
250	6350	5080	3810	7112	9652	12192	572
300	7620	6096	4572	8534	11582	14630	686



Wall mount/Ceiling mount Chart

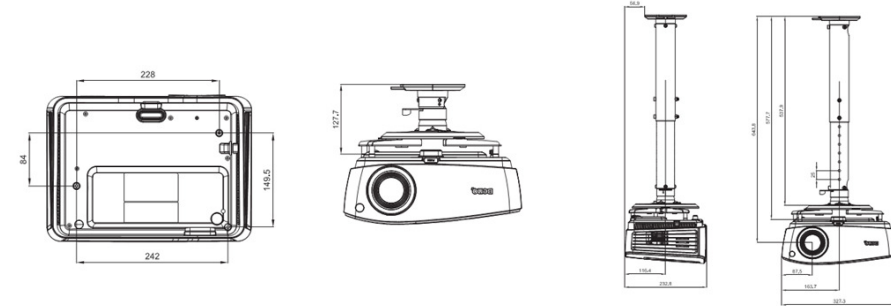

Dimension



*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.