BenQ MX764

Digital Projector

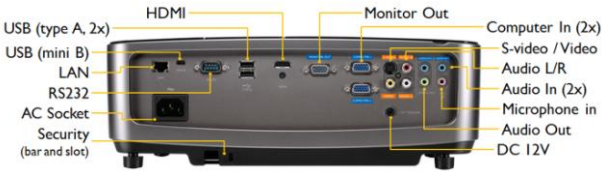

Display Technology	DLP® by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Resolution Supported	VGA (640 x 480) to UXGA (1600 x 1200)	
Brightness	4200 ANSI Lumens	
Contrast Ratio	5,300:1 (Full on / Full off)	
Image Size	40" to 300"	
Throw Ratio	1.4 (70" @ 2 meter)	
Zoom Ratio	1.6	
Keystone correction	1D, Vertical +/- 40 degrees (auto / manual)	
Lens	F = 2.45 ~ 3.07	
Lamp Life*	300W, 2500 / 3000 hours (Normal / Economic mode)	
Lamp Warranty	12 months or 2,000 cumulative hours whichever comes first	
Operational Noise	35 / 30 dB (Normal / Economic mode)	
Displayable Colours	Full 1.07 billion color palette	
Aspect Ratio	4:3 native, 5 aspect ratio selectable	
Horizontal Frequency	31 ~ 102 kHz	
Vertical Scan Rate	23 ~ 120 Hz	
Interface	Computer in (D-sub 15pin) x 2 (shared with Component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 Audio in (Mini Jack) x 2 Audio L/R in (RCA) x 2 Audio out (Mini Jack) x 1 Microphone in (Mini Jack) x 1	Speaker 10W x 2 HDMI V1.3 x 1 LAN (RJ45) x 1 (LAN Control & LAN Display) USB (Type A) x 2 (USB Reader & Keyboard / Mouse & Wireless Dongle) USB (Type Mini B) x 1 (USB Display & Download & Page up/down) DC 12V Trigger (3.5mm Jack) x 1 RS232 (DB-9pin) x 1
Compatibility	Video Compatibility	NTSC / PAL / SECAM
	HDTV Compatibility	480i / 480p / 576i / 576p / 720p / 1080i / 1080p
	3D Compatibility	PC: 120Hz Frame Sequential 3D for resolutions up to XGA PC: 60Hz Top-bottom 3D for resolutions up to SXGA+ Video: 60Hz Frame Sequential 3D for resolutions up to 480i
Dimensions (HxWxD)	120.5 x 339 x 252 mm	
Weight	Net weight: 3.3 kg. | Gross weight: 4.7 kg.	
Auto Switching Power Supply	100 to 240 VAC, 50/60 Hz	
Power consumption	406W, Standby <0.5W	
On Screen Display Languages	Arabic / Bulgarian / Croatian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hindi / Hungarian / Indonesian / Italian / Japanese / Korean / Norwegian / Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish / Swedish / Thai / Traditional Chinese / Turkish (28 Languages)	
Application Modes	Dynamic / Presentation / sRGB / Cinema / User 1 / User 2	
Functions	BrilliantColor™ Closed Captioning 3D Color Management Digital Zoom (x2) Freeze HDTV Compatible SRS Certified USB Display + Reader Windows 7 Certified	High Altitude Mode Quick Auto Search Wall Color Correction Blank Auto Off Security Password Security Bar + K-locker slot LAN Control + Display Presentation Timer
Accessories Included	Quick Start Guide User Manual CD Remote Control w/ Battery	VGA (D-sub 15pin) Cable Power Cord
Accessories Optional	Wireless USB dongle 3D Glasses	Presentation Plus Spare Lamp Kit

All our projectors are RoHS compliant

** Lamp life results will vary depending on environmental conditions and usage.*

All specifications are subject to change without notice. Available models (specs inc.) may vary from different regions.