



Model Name **SX914 Projector**

Unique selling point

- * 6000AL High Brightness
- * Big zoom ratio: 1.6
- * Len shift support
- * Blu-ray Full HD 3D support
- * SRS WOW HD™ audio compatible
- * Full LAN function support

Trade Mark




Projection System	DLP	
Native Resolution	XGA(1024x768)	
Brightness	6000AL	
Contrast Ratio	6500:1	
Display Color	1.07 Billion Colors	
Lens	F=2.1-2.63, f=21.70-34.94mm	
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)	
Throw Ratio	1.5-2.4 (65.6"±3% @ 2m)	
Image Size (Diagonal)	30"~300"	
Zoom Ratio	1.6±2%	
Lamp Type	350W	
Lamp(Normal/Economic)*	1500/2000 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Lens Shift	Vertical: 115%-125%±5%	
Resolution Support	VGA(640 x 480) to WVUXGA_RB(1920 x 1200)*RB = Reduced blanking	
Horizontal Frequency	15K-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility	Frame Sequential: Up to 480i
	(Please refer to User Manual for detailed support timing.)	Frame Packing: Up to 24 Hz 1080p
		Side by Side: Up to 60Hz 1080i
		Top Bottom: Up to 24Hz 1080p
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	Component video in	x 1
	HDMI	x 2
	Audio in (Mini Jack)	x 1
	Audio in (L/R)	x1
	Audio out (Mini Jack)	x 1
	Microphone in (Mini Jack)	x 1
	Speaker	10W x 2
	USB (Type mini B)	x 1 (Download & page/down)
	RJ45	x 1(LAN Control & LAN Display & Audio)
	USB (Type A)	x 2 (USB Reader & Wireless Display & Remote Desktop)
	RS232 (DB-9pin)	x 1
	DC 12V Trigger (3.5mm Jack)	x 1
	IR Receiver	x2 (Front+rear)
Dimensions	Dimensions(W x H x D)	446 x 152 x 336 mm
	Weight	6.2kg(13.7lbs)
Power	Power Supply	AC100 to 240V, 5A, 50 to 60 Hz
	Power Consumption	525W(Max), Standby<0.5W
Audible Noise	35/30 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2	
Accessories	Standard	Optional
	Lens Cover	Remote Control w Battery
	Power Cord (by region)	Spare Lamp Kit
	Warranty Card (by region)	VGA(D-sub 15pin) Cable
		Ceiling Mount
	User Manual CD, QSG	RS232 Cable

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


SX914 Projector

Distance Chart

Screen size				Distance from screen [mm]			Vertical offset [mm]		
Diagonal	Height	Width		Min distance (with max zoom)	Average	Max distance (with min zoom)	Max offset 125%	Min offset 115%	Mid offset 120%
[inch]	[mm]	[mm]	[mm]						
50	1270	762	1016	1544	2012	2479	95	57	76
60	1524	914	1219	1853	2414	2975	114	69	91
70	1778	1067	1422	2162	2816	3471	133	80	107
80	2032	1219	1626	2471	3219	3966	152	91	122
90	2286	1372	1829	2780	3621	4462	171	103	137
100	2540	1524	2032	3089	4023	4958	191	114	152
110	2794	1676	2235	3398	4426	5454	210	126	168
120	3048	1829	2438	3706	4828	5950	229	137	183
130	3302	1981	2642	4015	5230	6446	248	149	198
140	3556	2134	2845	4324	5633	6941	267	160	213
150	3810	2286	3048	4633	6035	7437	286	171	229
160	4064	2438	3251	4942	6437	7933	305	183	244
170	4318	2591	3454	5251	6840	8429	324	194	259
180	4572	2743	3658	5560	7242	8925	343	206	274
190	4826	2896	3861	5868	7644	9420	362	217	290
200	5080	3048	4064	6177	8047	9916	381	229	305
250	6350	3810	5080	7722	10058	12395	476	286	381
300	7620	4572	6096	9266	12070	14874	572	343	457

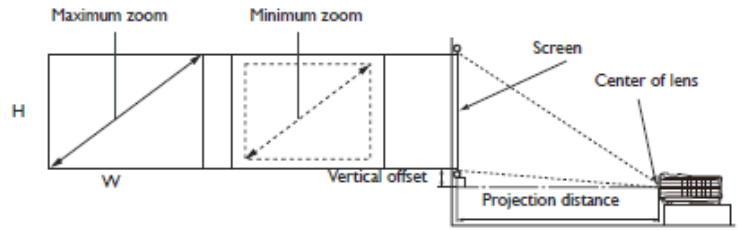


Shifting the projection lens

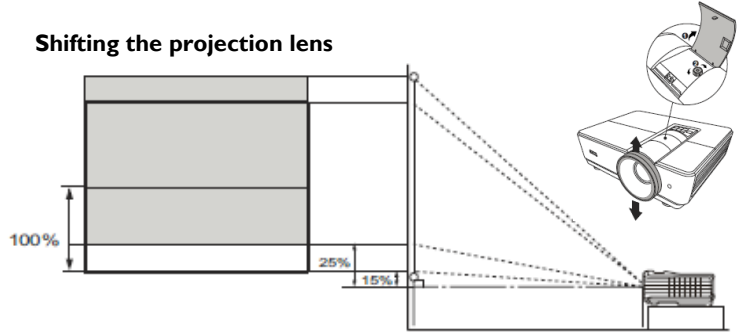

Wall mount/Ceiling mount Chart

Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

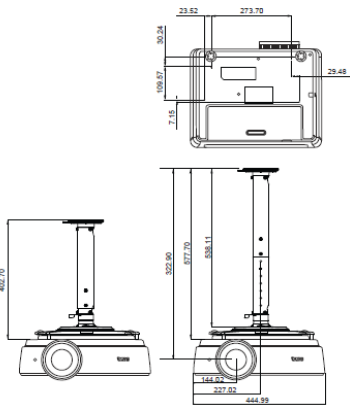

Dimension

