


BenQ Digital Camera C740
Make the Moment Eternity.



C740 Product Features

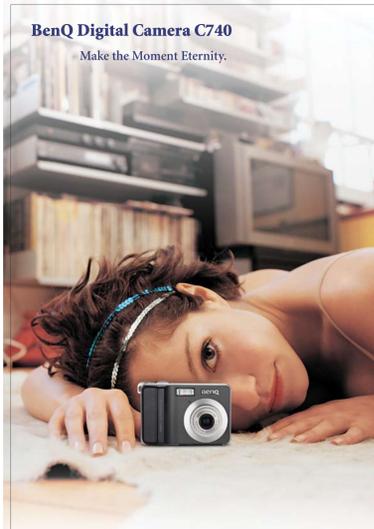


Large 2.5" LCD display
2.5" high-resolution TFT LCD display gives you richer colors and brighter screens with less power consumption.



Shake-Free mode
The Shake-Free mode helps to prevent blurry photos from hand-shaking and enables you to get the super-clear image.




Continuous movie recording with optical zoom
Enables to shoot high-resolution movie recording. C740 supports optical zoom in movie mode.



Continuous shooting till memory full
Captures all the images you want! You can continuously shoot as many photos as you wish until memory card is full.



smc PENTAX JX optical zoom lens with 7 Megapixel's CCD
Enhanced sharpness and color presentation due to smc super multi-coating lens technology.



Decrease Light Reflection

High ISO portrait mode
Support high sensitivity (ISO) to light up to 1000 to ensure clear photos in dark environment.



PASM mode
Precise Aperture (depth of field), shutter (shutter speed), Manual (manual focus operation and shutter), and Program (programmable auto) feature operation that allows according to the user's needs to satisfy every the photo requests.

BenQ DC C740

Specifications

Image Sensor	7.0 Mega Pixels CCD, Size: 1/2.5 inch
Image Resolution	3072x2304 (7M) / 3072x2048 (3.2) / 3072x1728 (1.659) / 2560x1920 (5M) / 2048x1536 (3M) / 1024x768 (1M) / 640x480 (VGA)
Lens	smc Pentax lens f=6.2 (W) - 18.6 (T)mm, (35mm film equivalent) 37.5 - 112.5mm; F12.8 (W) - 5.2 (T)
Zoom	Optical: 3X Digital: 4X
LCD	2.5" TFTS LCD / 150K Dot
Dimensions / Weight	91.5x61.5x26.32mm (mm) / 140g (without battery & SD card)
Power Source	AA battery x2
Storage Type	Built-in 9 MB SD card compatible
Focus Range	Normal: 80cm - infinity Macro: 15cm - 1m
Shutter Speed	1/2000 - 8 sec
Movie Mode	Video: 640x480 / 320x240 / 160x120 (30fps) Continuous recording with sound

White Balance	Auto / Daylight / Cloudy / Tungsten / Fluorescent (H) / Fluorescent (L) / MWB
Exposure	-2 - +2 EV (0.3EV / step)
ISO	Auto / 50 / 100 / 200 / 400
Flash	Auto / Red-eye reduction / Forced on / Slow sync / Forced off
Self-Timer	2 sec / 10 sec / 10+2 sec
File Format	Still Image: JPEG (EXIF 2.2 compatible), DCF compatible, Support DPOF Video: M-JPEG / Audio: WAV
Interface	Digital output: USB 2.0 Audio / Video output (NTSC/PAL) Pictbridge
Accessory	- USB cable - Software CD ROM - User's Manual - Hand Strap - Pouch - AV Cable - AA battery x2

