



**Model Name** **MW665 Digital Projector**

**Unique selling point** **Trade Mark**

- \* Designed for Business
- \* Easy carrying & Control
- \* Easy Maintenance
- \* Wireless display with Qpresenter Pro App
- \* New 3D format for entertainment




<b>Projection System</b>	DLP	
<b>Native Resolution</b>	WXGA(1280x800)	
<b>Brightness</b>	3200AL	
<b>Contrast Ratio</b>	13000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F2.59-2.87 f=16.88-21.88 mm	
<b>Aspect Ratio</b>	Native 16:10 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	1.31~1.57(71"@ 2m)	
<b>Image Size (Diagonal)</b>	44"-300"	
<b>Zoom Ratio</b>	1.3:1	
<b>Lamp Type</b>	210W	
<b>Lamp(Normal/Economic/SmartEco Mode/LampSave/LumenCare)*</b>	4000/5000/6500/10000/2100 hours constant brightness	
<b>Keystone Adjustment</b>	2D, Vertical +/- 30 degrees, Horizontal +/- 25 degrees, under 3D timing only Vertical +/- 30 degrees	
<b>Projection Offset</b>	120% ±5%	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	15K~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	3D Compatibility (Please refer to User's Manual for detailed support timing.)	Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24Hz 1080p Side by Side: Up to 60Hz 1080i Top Bottom: Up to 24Hz 1080p
<b>Interface</b>	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	HDMI	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	Audio in (Mini Jack)	x 1
	Audio L/R in (RCA)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	2W x 1
	USB (Type A)	x 1 (USB Reader & Wireless Display)
	USB (Type mini B)	x 1 (Download & UBS display)
	RS232 (DB-9pin)	x 1
	RJ45	x 1
	IR Receiver	x2 (Front+Top)
<b>Dimensions</b>	Dimensions(W x H x D)	311.95 x 104.07 x 244.11 mm
	Dimensions(W x H x D)	311.95 x 90.07 x 244.11 mm
	Weight	2.65kg (5.84lbs)
<b>Power</b>	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	295W, Standby<0.5W
<b>Audible Noise</b>	33/28 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
<b>Picture Modes</b>	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
<b>Accessories</b>	<b>Standard</b>	<b>Optional</b>
	Carry Bag	Presentation Plus
	Remote Control w/ Battery	Spare Lamp Kit
	Power Cord (by region)	Ceiling Mount
	User Manual CD	3D Glasses
	Quick Start Guide	
	Warranty Card (by region)	
	VGA(D-sub 15pin) Cable	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


# MW665 Digital Projector

## Distance Chart

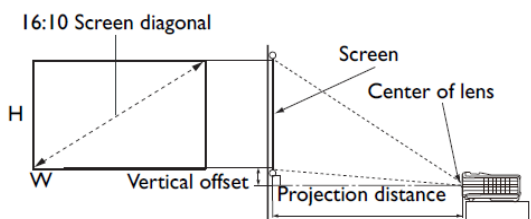

Diagonal		Screen size		Projection distance (mm)			Vertical offset (mm)
Inch	mm	W (mm)	H (mm)	Min distance (max. zoom)	Average	Max distance (min. zoom)	
60	1524	1292	808	1569	1804	2039	81
70	1778	1508	942	1830	2105	2379	94
80	2032	1723	1077	2092	2405	2719	108
90	2286	1939	1212	2353	2706	3059	121
100	2540	2154	1346	2614	3007	3399	135
110	2794	2369	1481	2876	3307	3739	148
120	3048	2585	1615	3137	3608	4078	162
130	3302	2800	1750	3399	3908	4418	175
140	3556	3015	1885	3660	4209	4758	188
150	3810	3231	2019	3922	4510	5098	202
160	4064	3446	2154	4183	4810	5438	215
170	4318	3662	2289	4444	5111	5778	229

## Wall mount/Ceiling mount Chart

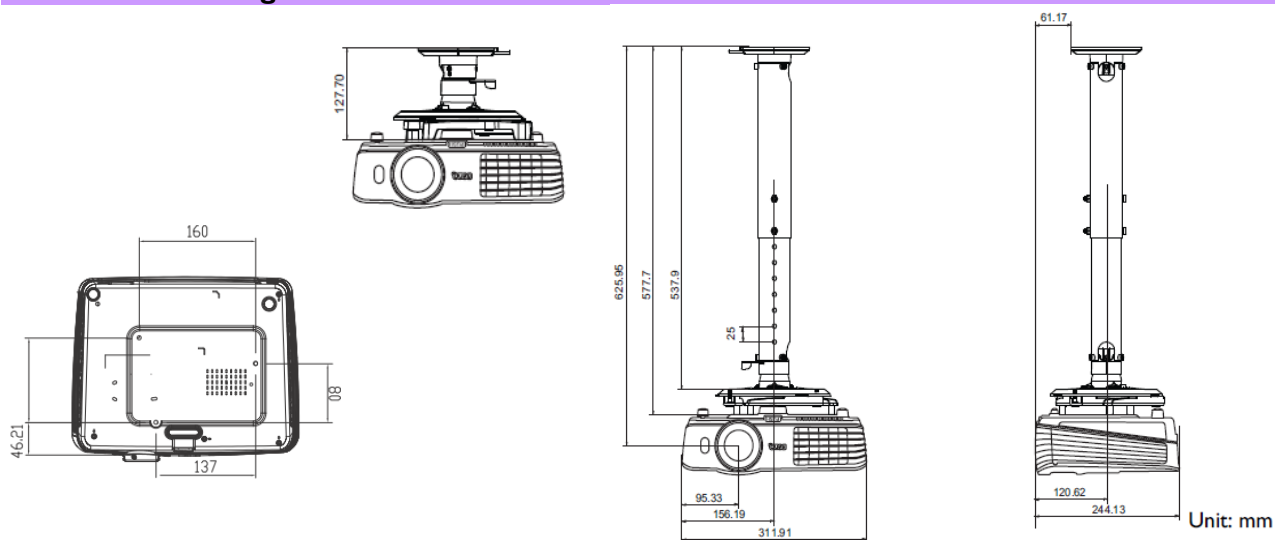

## Dimension



Unit: mm