




Model Name		DL550F Digital Signage		
Unique selling point				
<div>* Dual display simuntaneously</div> <div>* Slim & light than normal 2 sides display</div> <div>* PID operates 24/7, over 50,000 hrs</div> <div>* Landscap & Portrait orientation mode support</div> <div>* With various celling type (Ceiling/Wall/Stand types) installation to meet different scenarios</div>				
Panel	Screen Diagonal	55"		
	Backlight	LED		
	Resolution	FHD 1920 x 1080 (pixels)		
	Aspect Ratio	16 : 9		
	Brightness	450 / 450 nits		
	Contrast Ratio	3000:1		
	Viewing Angle	178 degree (H) / 178 degree (V)		
	Color gamut (x% NTSC)	72%		
	Frame Rate	60Hz		
	Response Time	8ms		
	Panel bit	8 bit, 16.7M		
	Light life	50,000 hrs (typ.)		
	Orientation	Landscape / Portrait		
Interface	Input/Output	Power (AC) In	x 1	
		Audio line-in	N/A	
		Composite video In/ Out (BNC)	N/A	
		Composite audio In/ Out (RCA)	N/A	
		Component video (RCA)	N/A	
		External Speaker Out (L/R)	N/A	
		D-sub In/ Out	N/A	
		HDMI (Type A) in	x 2	
		DVI-D In/ Out	N/A	
		DisplayPort Input	N/A	
		RJ45	N/A	
		RS232 In/ Out	N/A	
	Others	AC power switch	x 1 (Power box)	
Mechanical	Dimensions(W x H x D)	1516.0 x 858.0 x 23.4 mm		
	Bezel Width (T/B/L/R)	64.2/239.1/87.0/87.0 mm		
	Weight (without packing)	49.5 kg		
Power	Power supply	100 V ~ 240 V, 50 Hz / 60 Hz		
	Power consumption	230W (Typ.)		
OSD	On-Screen Display Languages	EN / ES / FR / DE / IT/ PT / RU /SC / JP /TC		
Software	Color Calibration	N/A		
	Multiple Display Control (MDA)	N/A		
Accessories	Standard	Remote Control w/ Battery	x 1	
		Power Cord (by region)	x 3 (US/UK/EU)	
		Quick Start Guide	x 1	
		HDMI Cables	x 2	
		VGA(D-sub 15pin) Cable	N/A	
		Video wall installation pad (for gap inspection)	N/A	
	Optional	Mounting	Ceiling/Wall/Stand types	
		Edge Finishing Kits	N/A	
		Display PRO color meter (for Color Calibration SW)	N/A	

DL550F Digital Signage

Input/output terminals

Connecting HDMI cables and connectors

Plug two HDMI cables into the cabinet, and ensure that all cable plugs are firmly fitted into the jacks.

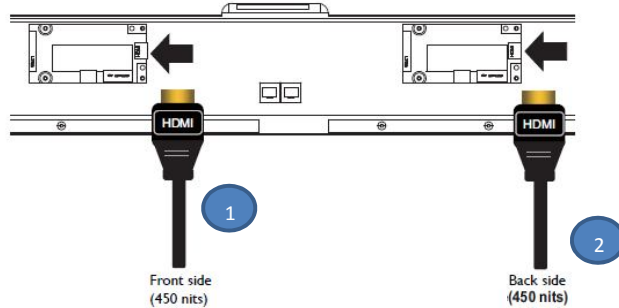


* Note:

Before connecting HDMI_2, please make sure HDMI_1 is already well connected. Otherwise, there is no signal.

Connecting the power cord

Plug in the power cable and turn on the AC power switch.

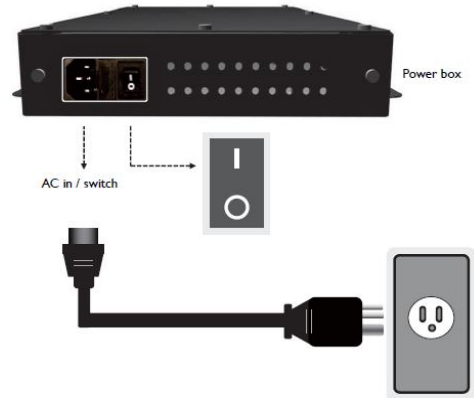

Dimension

