



Model Name **MW721 Projector**

Unique selling point

- * SmartEco Power Saving technology
- * 3500AL High Brightness
- * Up to 6000 hours Long lamp life
- * <0.5W standby mode
- * High contrast ratio: 13000:1
- * LAN control and LAN display function

Trade Mark




Projection System	DLP	
Native Resolution	WXGA (1280x800)	
Brightness	3500AL	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F2.59~2.87, f=16.88~21.88mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.21~1.57(76.5"@2m)	
Image Size (Diagonal)	44"~300"	
Zoom Ratio	1.3:1	
Lamp Type	240W	
Lamp(Normal/Economic/SmartEco Mode)*	3500/5000/6000 hours	
Keystone Adjustment	1D, Vertical +/- 40 degrees	
Projection Offset	120%±5%	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	15-102KHz	
Vertical Scan Rate	23-120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x1
	Audio in (Mini Jack)	x 2
	Audio in (L/R)	x1
	Audio out (Mini Jack)	x 1
	Microphone in(Mini jack)	x 1
	Speaker	10W x 1
	USB (Type mini B)	x1 (Download & page/down)
	RJ45	x 1 (LAN Control & LAN Display)
	RS232 (DB-9pin)	x 1
	IR Receiver	x2 (Front+rear)
Dimensions	Dimensions(W x H x D)	311 x 104 x 244 mm
	Weight	2.9kg(6.4lbs)
Power	Power Supply	AC100 to 240V, 3.5A, 50 to 60 Hz
	Power Consumption	375W(Max), Standby<0.5W
Audible Noise	33/30 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/3D/User 1/User 2	
Accessories	Standard	Optional
	Lens Cover	Spare Lamp Kit
	Remote Control w/ Battery	Ceiling Mount
	Power Cord (by region)	RS232 Cable
	User Manual CD	Carry Bag
	Quick Start Guide	
	Warranty Card (by region)	
	Carry bag	
	VGA(D-sub 15pin) Cable	

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

MW721 Projector

Distance Chart


Screen size				Distance from screen (mm)			Vertical offset (mm)
Diagonal	W	H	Min length	Average	Max length		
Inch	mm	(mm)	(max. zoom)		(min. zoom)		
40	1016	862	538	1046	1203	1359	54
50	1270	1077	673	1307	1503	1699	67
60	1524	1292	808	1569	1804	2039	81
80	2032	1723	1077	2092	2405	2719	108
100	2540	2154	1346	2614	3007	3399	135
120	3048	2585	1615	3137	3608	4078	162
150	3810	3231	2019	3922	4510	5098	202
200	5080	4308	2692	5229	6013	6797	269
220	5588	4739	2962	5752	6614	7477	296
250	6350	5385	3365	6536	7516	8497	337
300	7620	6462	4039	7843	9020	10196	404

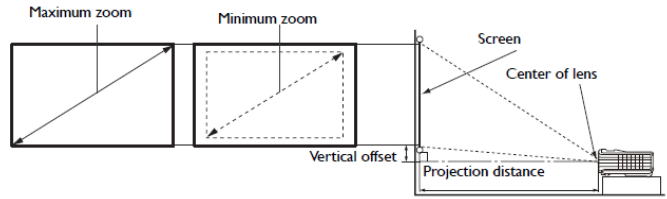

Wall mount/Ceiling mount Chart

Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

Unit: mm

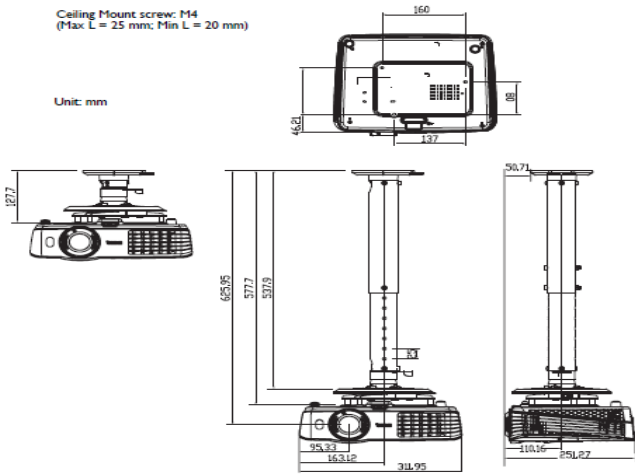

Dimension

