

MW853UST+ Digital Projector




Features

- Interactivity with pen and finger touch (optional)
- High brightness 3,200 ANSI Lumens
- Vertical lens shift
- Dual HDMI inputs
- Blu-ray 3D Supported
- Wall mount included

Box Contents

- Remote Control w/ Battery *1
- Power Cord (3M) *1
- User Manual CD *1
- Quick Start Guide *1
- VGA(D-sub 15pin) Cable *1
- Wall mount kit (installation guide) *1
- Lens shift hex key *1

Dimension

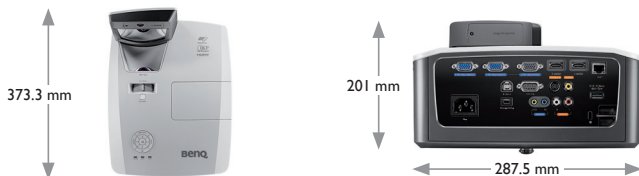


Optional Accessories

- Spare Lamp Kit 5J.J8M05.01 I
- 3D Glasses. 5J.J9H25.00 I
- PointWrite kit (PW01U) 5J.J8L26.20E
- PointWrite Touch module (PT01). 5J.J8L26.10E



Because it matters

Input and Output Terminals

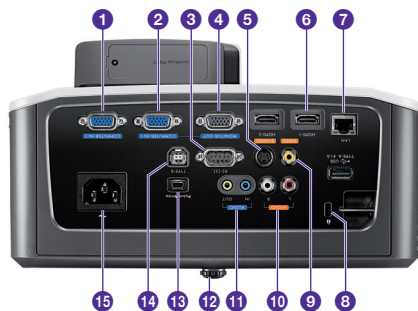

- | | |
|-----------------------------------|--|
| 1 COMPUTER-2 input jack | 9 VIDEO input jack |
| 2 COMPUTER-1 input jack | 10 Audio (L/R) input jack |
| 3 RS-232 control port | 11 Audio input/output jack |
| 4 RGB signal output jack | 12 Adjuster foot |
| 5 S-VIDEO input jack | 13 PointWrite port (PointWriter kit is required) |
| 6 HDMI input jack | 14 USB Type B port |
| 7 RJ45 LAN input jack | 15 AC power cord inlet |
| 8 Kensington anti-theft lock slot | |

Product Specifications

Projection System	DLP	
Native Resolution	WXGA(1280*800)	
Brightness	3200AL	
Contrast Ratio	10,000:1	
Display Color	1.07 Billion Colors	
Lens	F2.5,f=5.1mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	0,35	
Image Size (Diagonal)	Optimize 80"~100", Max up to 300"	
Zoom Ratio	Fix	
Lamp Type	230W	
Lamp(Normal/Economic/SmartEco Mode)*	4000/5000/7000 hours	
Keystone Adjustment	1D,Vertical +/- 40 degrees	
Lines shift range	Vertical 8%	
Projection Offset	140%~148% (±5%)	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Shared with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 2
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Audio L/R	x 1
	Speaker	10W x 2
	USB (Type mini B)	x 1 (PW01U interactive module)
	USB (Type B)	x 1 (FW download)
	USB(Type A)	x 1 (IA Power for PT01 Touch module)
	RJ45	x 1 (LAN control)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 1 (Front)
Dimensions	Dimensions(W x H x D)	373.3*287.5*130.2mm (w/o Mirror) 373.3*287.5*201mm(w Mirror)
	Weight	5KG(w/o wall mount)
Power	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	typical 290W, stanby power <0.5W
Audible Noise	33/29 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9HJ8L77.26E
EAN Code	471 8755 05502 7
Dimensions Single Carton (cm)	120 x 100 x 12
Carton Weight (kg)	15,4
Pallet Qty	12



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters