



Model Name	RP650 IFP
Unique selling point	


- * NextWindow 5-points Multitouch
- * 50,000 hours light life for long use
- * Front IO orientation for easy access
- * Ambient light sensor for eye care
- * USB reader/player function
- * 20mm border is active function for Win8 touch
- * LAN control and LAN display function

Panel	Screen Diagonal	65"	
	Backlight	LED	
	Resolution	FHD 1920 x 1080 (pixels)	
	Aspect Ratio	16 : 9	
	Brightness	360nits	
	Contrast Ratio	4000:1	
	Viewing Angle	178 degree (H) / 178 degree (V)	
	Color gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	8ms	
	Panel bit	10-bit	
	Light life	50000hrs (min.)	
Orientation	Landscape & Portrait		
Touch solution	Touch tech.	Optical	
	Number of touches	Multi-touch up to 5 touches	
	Resolution	32767 x 32767	
Cover glass	Thickness	Tempered, 5 mm	
	Hardness	7H	
	Built-in speaker	12W x 2	
Interface	Input	Power (AC) Inlet	x 1
		Audio line-in	x 1
		Composite video (BNC)	x 1
		Composite audio (RCA)	x 1
		Component video (RCA)	x 1
		D-sub	x 1
		Type A HDMI	x 2
		Type A USB	x 1
		Mini B USB	x 1
		RJ45	x 1
		RS232	x 1
		Microphone-in (1/4")	x 1
		S-video	x 1
		DisplayPort	x 1
	Output	Power (AC) outlet	x 1
		Composite audio (RCA)	x 1
		RS232	x 1
		D-sub	x 1
Others	AC power switch	x 1	
	IR receiver	x 1	
Mechanical	Dimensions(W x H x D)	1515 x 981 x 210mm	
	Weight	67kg	
Power	Power supply	AC100 to 240V, 50 to 60 Hz	
	Power consumption	<265W, 221W (Typ.)	
OSD	On-Screen Display Languages	EN/FR/ES/PT/SC/TC/DE/NL/PO/PY/CZ/DA/SW/IT/RO/FI/NO/GR/TU/AR/JA (21L)	
Accessories	Standard	Remote Control w/ Battery	x 1
		Power Cord (by region)	x 1
		Touch pen	x 2
		Quick Start Guide	x 1
		audio cable connection guide	x 1
		USB cable (male to male)	x 1
		VGA(D-sub 15pin) Cable	x 1
		DisplayNote Card	x 1

Optional	Audio cable (1 to 3)	x 1
	Wallmount	
	Stand	
	USB wi-fi dongle	


RP650 IFP

Input/output terminals

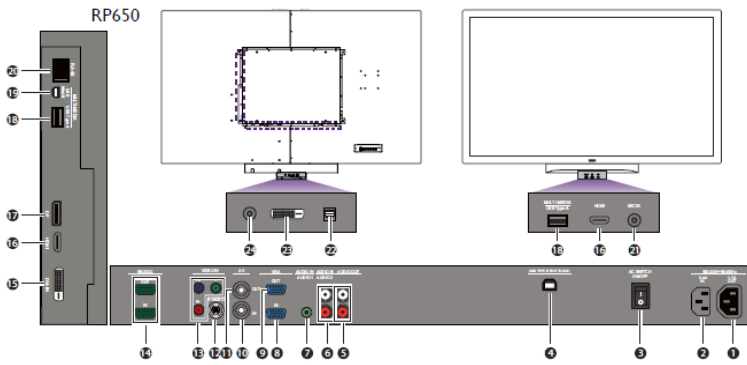

No.	Name	Description
1	AC OUT	Relays the AC power from the AC IN jack to another display.
2	AC IN	Connects to a power outlet via the supplied power cord.
3	AC SWITCH ON/OFF	Turns on or off the main power.
4	USB TYPE B FOR TOUCH	Connects the USB cable from the display to a computer to use the touch module.
5	AUDIO OUT (R/L)	Outputs audio signals to an external device.
6	AUDIO IN (AUDIO2)	Receives S-Video signals from an external device (such as a VCR or DVD player).
7	AUDIO IN (AUDIO1)	Receives composite video (YPbPr) signals from an external device (such as a DVD player, HDTV device or Laser disc player).
8	VGA IN	Receives composite video (YPbPr) signals from an external device (such as a DVD player, HDTV device or Laser disc player).
9	VGA OUT	RS232C IN/OUT Receives control signals from a computer or another display. RS232C OUT outputs control signals from the RS232C IN input to another display.
10	AV IN	Receives HDMI signals from an external device (such as a Blu-ray disc player).
11	DVI-IN	Receives DVI signals from an external device (such as a computer).
12	HDMI	Receives HDMI signals from an external device (such as a Blu-ray disc player).
13	DISPLAY PORT	Connects to a DisplayPort compatible device.
14	USB B (Mini B)	Connects to a computer for USB display.
15	USB A (Type A)	Connects to a USB flash drive or WiFi dongle.
16	RJ-45	Connects to the RJ-45 port on your Ethernet router.
17	MIC IN	Connects to a microphone.
18	USB interface socket (Mini B)	Connects to the USB A (Type A) socket via the supplied USB interface cable.
19	DVI interface socket	Connects to the DVI-IN socket via the supplied DVI interface cable.
20	Audio interface socket	Connects to the AUDIO IN (AUDIO1) and AUDIO IN (AUDIO2) sockets via the audio interface cable.

Wallmount

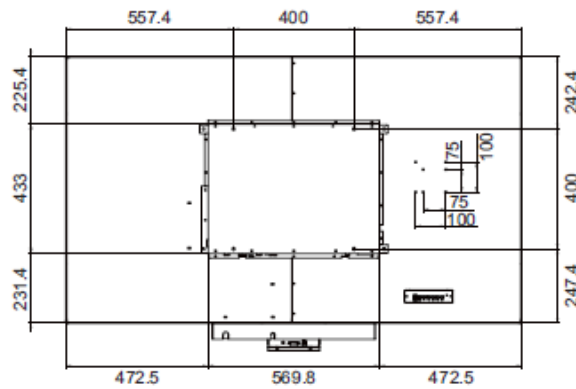

Dimension

