

DIGITAL
PROJECTOR

LX60ST




Features

- Native XGA (1024 x 768) Resolution
- 2000 ANSI Lumens, 80000:1 Contrast Ratio
- 0.6 Throw Ratio, Light Source Pure Laser
- LAN Control, Display, USB Reader/Display
- 20W Speaker, HDMI x 1, Wireless Display (optional)



Input and Output Terminals

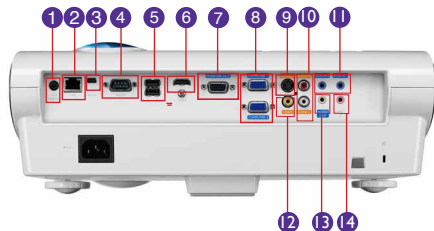

- | | |
|---------------------|----------------------------|
| 1 12 V Trigger | 8 Computer-1/ Computer-2 |
| 2 LAN (RJ45) | 9 S-Video |
| 3 USB (Type Mini B) | 10 Audio L/R In (RCA) |
| 4 RS-232 (DB-9pin) | 11 Audio In 1 / Audio In 2 |
| 5 USB (Type A) x 2 | 12 Video |
| 6 HDMI | 13 Audio Out |
| 7 Monitor Out | 14 Microphone in |

Specifications

Projection System	DLP
Native Resolution	XGA(1024 x 768)
Brightness	2000 ANSI lumens
Contrast Ratio	80000:1
Display Color	1.07 Billion
Lens	F=2.59, f=6.95mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	0.6 (81" @ 3.28ft)
Image Size (Diagonal)	80"~300"
Zoom Ratio	Fixed
Light Source	Laser Diode
Light Source Life (Nor/Eco Mode)*	10000/20000 hrs (Normal/Eco)
Keystone Adjustment	1D, Vertical +/- 30 degrees (Auto/Manual)
Projection Offset	130% +/- 5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	31K~102KHz
Vertical Scan Rate	23~120Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
3D Compatibility (PC)	120Hz Frame Sequential 3D for resolutions up to WXGA 60Hz Top-bottom 3D for resolutions up to SXGA+
3D Compatibility (Video)	60Hz Frame Sequential 3D resolutions up to WXGA 60Hz Frame Sequential 3D for resolutions up to 480i
Interface	Computer in (D-sub 15pin) x 2 (shared with Component video) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 Audio in (Mini Jack) x 2 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Microphone in (Mini Jack) x 1 Speaker 10W x 2 HDMI V1.3 x 1 LAN (RJ45) x 1 (LAN Control & LAN Display) USB (Type A) x 2 (USB Reader&Keyboard/Mouse&Wireless Dongle) USB (Type Mini B) x 1 (USB Display & Download & Page up/down) DC 12V Trigger (3.5mm Jack) x 1 RS232 (DB-9pin) x 1
Dimensions (W x H x D)	15.5" x 5.89" x 11.73" (include adjustment footer)
Weight	11.24 lbs (5.1kg)
Power Supply	100 to 240 VAC, 50 to 60 Hz
Power Consumption	270W(Max), Standby<0.5W
Audible Noise	33/32 (Normal/Eco)
On-Screen Display Languages	Arabic/ Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Modes	Dynamic/Presentation/sRGB/Cinema/User 1/User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable
Accessories (Optional)	0.6 Wall Mount P/N: 5J.J4R10.001 Wireless USB Dongle P/N: 5J.J0614.A21 3D Glasses P/N: 5J.J0T14.011 Carry Bag
Limited Warranty	3 Years Parts/Labor

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

LX60ST 11-27-12-BQus




BenQ America Corp.
15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 Tel: (949) 255-9500 www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved.
Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders.
Specifications subject to change without notice.



LX60ST Digital Projector


Distance Chart

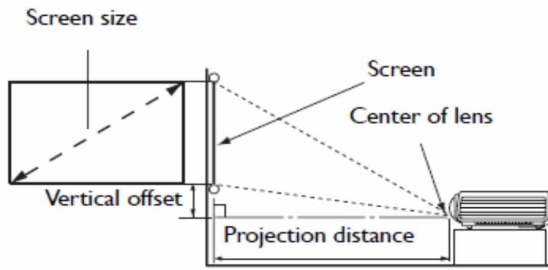


Screen Size				Distance from screen (inch)	Vertical offset (inch)
Diagonal		W	H		
Inch	mm	inch	inch		
80	2032	64	48	38.89	7.2
100	2540	80	60	48.62	9.01
120	3048	96	72	58.3	10.78
150	3810	120	90	72.91	13.5
180	4572	144	108	87.48	16.18
200	5080	160	120	97.20	17.99
220	5588	176	132	106.92	19.8
240	6096	192	144	116.65	21.61
270	6858	216	162	131.22	24.29
300	7620	240	180	145.8	27.0

Wall Mount / Ceiling Mount Chart

Computer Resolution: XGA Image Resolution: XGA	Diagram Reference	SMART Board 660	SMART Board 680	Promethean ActivBoard 164	Promethean ActivBoard 178	RM ClassBoard2 77.5	Hitachi StarBoard FX-63	StarBoard FX-77
Image Diagonal (inch)	D	2.51	3.03	2.51	3.07	3.05	2.48	3.03
Image Height (inch)	H	38.38	46.18	38.38	46.81	74.05	37.79	46.18
Image Width (inch)	W	51.18	61.61	51.18	62.40	62.0	50.39	61.61
Distance from floor to bottom of image (inch)	f	35.43	35.43	35.43	35.43	35.43	35.43	35.43
Distance from screen surface to projector lens	a	31.1	37.4	31.10	37.91	37.67	30.62	37.4
Distance from top case to the top of image (inch)	b	3.09	4.27	3.09	4.35	4.31	3.01	4.27
Distance from top of wall mount to ceiling (inch)	c	1.96	1.96	1.96	1.96	1.96	1.96	1.96
Minimum Ceiling Height (inch)	e	92.03	101.0	92.03	101.71	128.92	91.36	101.0

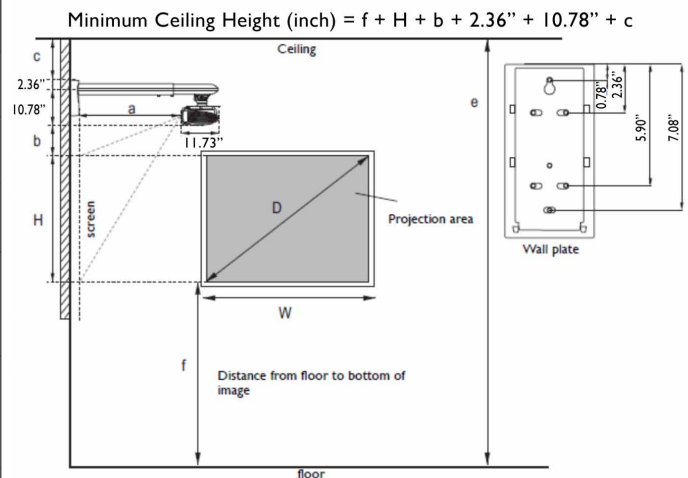

Dimensions

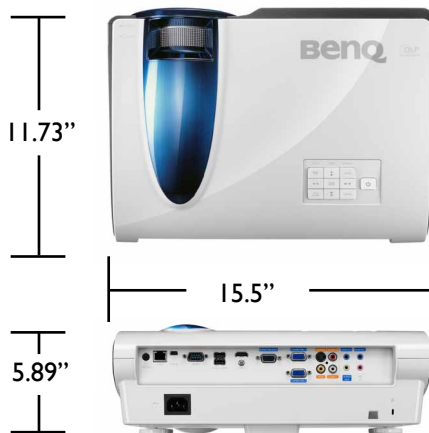

4.61" (Excludes Adjustment footer)

