

# MH760

## Digital Projector

### KEY FEATURES

- High resolution Full HD 1920 x 1080
- High brightness 5000AL
- Big Zoom 1.3X
- Efficiently-operated and Easily-centralized
- Vertical Lens Shift
- Central Lens


### SPECIFICATIONS

<b>Projection System</b>	DLP	
<b>Native Resolution</b>	Full HD (1920 x 1080)	
<b>Brightness</b>	5,000AL	
<b>Contrast Ratio</b>	3,000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F=2.59~2.87, F=16.88~21.88	
<b>Aspect Ratio</b>	Native 16:9 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	1.15~1.5	
<b>Clear Image Size</b>	60"~180"	
<b>Zoom Ratio</b>	1.3X	
<b>Lamp Type</b>	370W	
<b>Lamp(Normal/Economic)</b>	2000/2500 hours	
<b>Keystone Adjustment</b>	2D,Vertical & Horizontal ± 30 degrees	
<b>Projection Offset</b>	109% ±2.5%	
<b>Lens Shift</b>	Vertical: +6%	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	15K~102KHz	
<b>Vertical Scan Rate</b>	24~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
<b>Interface</b>	Computer in (D-sub 15pin)	x 1 (Shared with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 2 (one with MHL)
	Audio in (Mini Jack)	x 1
	Audio L/R in (RCA)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	10W x 2
	LAN (RJ45)	x 1 (LAN control)
	USB (Type A)	x 1 (5V/1.5A Power Supply)
	USB (Type MINI-B)	x 1 (Download)
	RS232 (DB-9pin)	x 1
	DC 12V Trigger	x 1
	IR Receiver	x 2
	Microphone in (Mini Jack)	x 1
<b>Dimensions</b>	Dimensions(W x H x D)	16.2" x 4.7" x 10.5" (411.4x118.4x267.5mm)
	Weight	10.8 lbs (4.9KG)
<b>Power</b>	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	Typical 490W, Network standby <6W, Standby power <0.5W
	Power Management Function	Automatic power off after 20 minutes without a display source.
<b>Audible Noise</b>	36/33 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	28 Languages	
<b>Picture Modes***</b>	Bright/Presentation/sRGB/Cinema/(3D)/User 1/User 2	
<b>Accessories</b>	Standard Remote Control w/ Battery Power Cord (by region) User Manual CD Quick Start Guide Warranty Card (by region) VGA(D-sub 15pin) Cable	Optional Spare Lamp Kit Ceiling Mount 3D Glasses
		P/N: 5JJDPO5.001 P/N: 5JJAM10.001 P/N: 5JJ9H25.001

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



### INPUT / OUTPUT TERMINALS

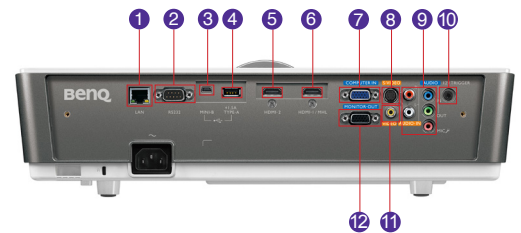

- |                           |                   |
|---------------------------|-------------------|
| ① LAN                     | ⑦ Computer in     |
| ② RS232                   | ⑧ S-Video         |
| ③ USB (Type mini B)       | ⑨ Audio In/out    |
| ④ USB Type A (1.5A Power) | ⑩ 12V Trigger     |
| ⑤ HDMI-2                  | ⑪ Composite Video |
| ⑥ HDMI-1 / MHL            | ⑫ Monitor-out     |

BenQ.us | BenQ.ca

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.



Because it matters