

DIGITAL
PROJECTOR

MX703




Features

- Native XGA (1024x768) Resolution
- 3,000 ANSI Lumens, 13,000:1 Contrast Ratio
- LAN Control
- SmartEco™ Power Saving Technology
- DLP® 3D via PC & Blu-Ray/DVD Player



Input and Output Terminals

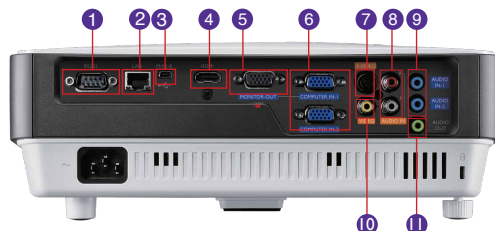

- | | |
|--------------------------|---------------------------|
| 1 RS-232 (DB-9pin) | 7 S-Video |
| 2 LAN (RJ45) | 8 Audio L/R In (RCA) |
| 3 USB (Type Mini B) | 9 Audio In 1 / Audio In 2 |
| 4 HDMI | 10 Video |
| 5 Monitor Out | 11 Audio Out |
| 6 Computer-1/ Computer-2 | |

Specifications

Projection System	DLP										
Native Resolution	XGA(1024 x 768)										
Brightness	3000 ANSI lumens										
Contrast Ratio	13000 : 1										
Display Color	1.07 Billion Colors										
Lens	F=2.54-2.73, f=18.18-21.84mm										
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)										
Throw Ratio	1.64-1.97 (60" @ 2m)										
Image Size (Diagonal)	37"~300"										
Zoom Ratio	1.2:1										
Lamp Type	210 W										
Lamp (Nor/Eco Mode)*	4500/6000/6500 hours										
Keystone Adjustment	ID, Vertical +/- 40 degrees										
Projection Offset	110%±5%										
Resolution Support	VGA (640 x 480) to UXGA (1600 x 1200)										
Horizontal Frequency	15K~102KHz										
Vertical Scan Rate	23~120Hz										
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p										
Video Compatibility	NTSC, PAL, SECAM										
Interface	Computer in (D-sub 15pin) x 2 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (Mini Jack) x 2 Audio in (L/R) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 USB (Type Mini B) x 1 (Download & Page up/down) RJ45 x 1 (LAN control) RS232 (DB-9pin) x 1 IR Receiver x 2 (Front + rear)										
Dimensions(W x H x D)	11.3" x 4.5" x 9.2"										
Weight	5.28lbs (2.4 kg)										
Power Supply	AC 100 to 240 V, 50/60 Hz										
Power Consumption	306W (Typical), Standby<0.5W										
Audible Noise	33/28 dBA (Normal/Economic mode)										
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)										
Picture Modes	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2										
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord (by region) User Manual CD, Quick Start Guide, Warranty Card (by region) VGA(D-sub 15pin) Cable										
Accessories (Optional)	<table border="0"> <tbody> <tr> <td>Presentation Plus</td><td>5J.J9301.001</td></tr> <tr> <td>Spare Lamp Kit</td><td>5J.J6V05.001</td></tr> <tr> <td>Ceiling Mount</td><td>5J.J4N10.001</td></tr> <tr> <td>3D Glasses</td><td>5J.J7K25.001</td></tr> <tr> <td>Carry bag</td><td>5J.J3T09.001</td></tr> </tbody> </table>	Presentation Plus	5J.J9301.001	Spare Lamp Kit	5J.J6V05.001	Ceiling Mount	5J.J4N10.001	3D Glasses	5J.J7K25.001	Carry bag	5J.J3T09.001
Presentation Plus	5J.J9301.001										
Spare Lamp Kit	5J.J6V05.001										
Ceiling Mount	5J.J4N10.001										
3D Glasses	5J.J7K25.001										
Carry bag	5J.J3T09.001										
Limited Warranty	3-Year Parts/Labor; 1-Year or 2000 hours of lamp life										

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



MX703 02-08-13-BQus



BenQ America Corp.


15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 Tel: (949) 255-9500 www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved.
Product names, logos, brands, and other trademarks featured or referred to in this materials are the property of their respective trademark holders.
Specifications subject to change without notice.




MX703 Digital Projector

Distance Chart

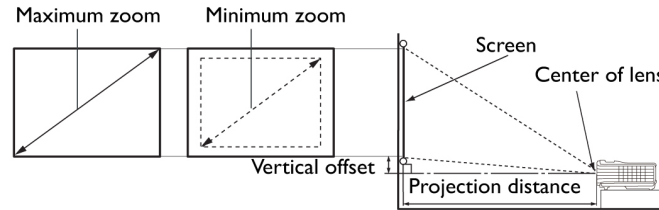


Screen Size				Projection distance (mm)			Vertical offset (inch)
Diagonal		W (inch)	H (inch)	Min distance (inch)	Average	Max distance (inch)	
Inch	mm			(Max zoom)		(Min zoom)	
40	1016	32	24	52.4	57.7	62.9	1.2
50	1270	40	30	65.6	72.1	78.7	1.5
60	1524	50	36	78.7	86.6	94.4	1.8
70	1778	56	42	91.8	101.0	110.2	2.1
80	2032	64	48	105.0	115.4	125.9	2.4
90	2286	72	54	118.0	129.9	141.7	2.7
100	2540	80	60	131.2	144.3	157.4	2.9
120	3048	96	72	157.5	173.2	188.9	3.6
150	3810	120	90	196.8	216.5	236.2	4.5
200	5080	160	120	262.5	288.7	314.9	5.9
250	6350	200	150	328.1	360.9	393.7	7.5
300	7620	240	180	393.7	433.0	472.4	9.0

Ceiling Mount Chart

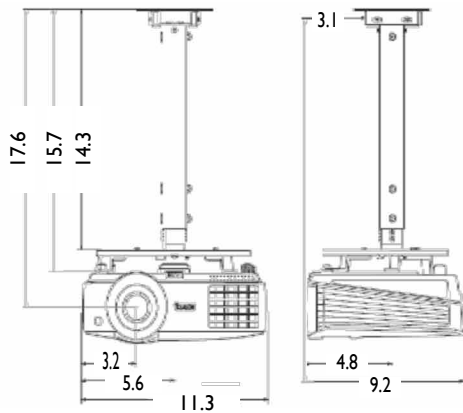

Ceiling Mount Screw: M4 x 8 (Max L = 8 mm)



Units: inch

Dimensions

