

DESIGNED FOR EDUCATION | **MX710** Future Proof • Excellent Image Quality • Affordable



SNMP
RJLink™



Features


- Native XGA (1024 x 768) Resolution
- 2700 ANSI Lumens, 5300:1 Contrast Ratio
- LAN Control/Display, USB Reader/Display
- Built-In 10W Speaker, Microphone-In
- 3D-Ready, Wireless Display (Optional)

Top / Front View



Input and Output Terminals

Back

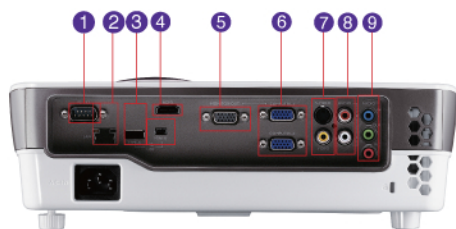

- 1 RS-232 x1
- 2 RJ45 x1
- 3 USB Type A & Mini B
- 4 HDMI x1
- 5 RGB Output x1
- 6 RGB In/Component x2
- 7 S-Video / Video
- 8 Audio R/L x1
- 9 Audio In & Out/Mic-In

Specifications

EDUCATION

| | |
|------------------------|--|
| Native Resolution | XGA (1024 x 768) |
| Brightness | 2700 ANSI Lumens |
| Contrast Ratio | 5300:1 (Full on/Full off) |
| Keystone | Auto Keystone; Manual Vertical +/- 40 Degree |
| Aspect Ratio | Native 4:3 (5 selectable aspect ratio) |
| Color | Full 16.7 Million colors palette |
| Lens | F = 2.59 ~ 2.87 |
| Zoom Ratio | Manual Zoom, 1.3:1 |
| Image Size (Diagonal) | 32" - 300" |
| Throw Ratio | 1.5 to 1.97 (65" @ 6.5 Feet) |
| Lamp Life | 210W, 4000/5000 hours (Normal/Eco-Mode) |
| PC Compatibility | VGA (640 x 480) to UXGA (1600 x 1200) |
| HDTV Compatibility | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility | NTSC, PAL, SECAM |
| Horizontal Frequency | 31-92 kHz |
| Vertical Scan Rate | 48-120 Hz |
| Input Terminals PC/AV | Analog RGB/Component: D-Sub 15 Pin x2 LAN Networking: RJ45 x1 (LAN Display) USB Type A x1 (Reader) USB Type Mini-B x1 (Display) HDMI (v1.3) x1 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2 Microphone in: Mini Jack x1, Stereo Mini Jack x1 |
| Output Terminals PC/AV | Analog RGB: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W x1 |
| Control Terminals | Serial Connector: RS-232 9 Pin (Male) RJ45 x1 (LAN Control) USB Connector: Type Mini-B (for service only) |
| Dimensions (W x H x D) | 12.24" x 4.09" x 9.6" |
| Weight | 5.94 lbs (2.7 kg) |
| Power Supply | 100 to 240 VAC, 50/60 Hz |
| Power Consumption | 336W (Max), Standby <1W |
| Noise Level | 30/26 dBA (Normal/Economical Mode) |
| Display Languages | Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese |
| Picture Mode | Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode |
| Functions | 3D-Ready/LAN Control & Display/USB Display & Reader/ Built-In 10W Speaker/Microphone-In/Digital Zoom 2x/ Closed Captioning/Quick Cooling/Panel Lock Key/Window 7 Compatible/Wireless Display (Optional) |
| Accessories (Standard) | Quick Start Guide/User Manual (CD)/Remote Control/ Power Cord/VGA Cable/Soft Carrying Case |
| Accessories (Optional) | Presentation Plus/Spare Lamp Kit/Universal Ceiling Mount |
| Lamp P/N | 5J.J3T05.001 |
| Limited Warranty | 3-Years Parts & Labor / 1-Year or 2000 hours of lamp life |

MX710_DM_BQus_3/11



BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

BenQ
Enjoyment Matters