

DIGITAL PROJECTOR | MX711




Features

- Native XGA (1024x768) Resolution
- 3200 ANSI Lumens; 5300:1 Contrast Ratio
- Built-In 10W Speaker; Microphone-In
- LAN Control/Display, USB Reader/Display
- 3D Ready, Wireless Display (Optional)



Input and Output Terminals

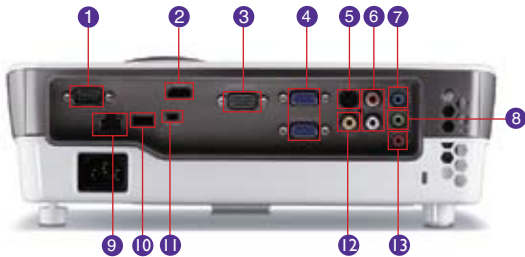

- | | |
|----------------------------------|------------------------------|
| 1 RS232 (DB 9-pin) | 8 Audio Out (Mini Jack) |
| 2 HDMI V1.3 | 9 LAN (RJ45) |
| 3 Monitor Out (D-sub 15pin) | 10 USB (Type-A) |
| 4 Computer In 1 & 2 (D-sub15pin) | 11 USB (Type Mini-B) |
| 5 S-Video in (Mini DIN 4pin) | 12 Video In (RCA) |
| 6 Audio In L&R (RCA) | 13 Microphone In (Mini Jack) |
| 7 Audio In (Mini Jack) | |

Specifications

Native Resolution	XGA (1024 x 768)	
Brightness	3200 ANSI lumens	
Contrast Ratio	5300:1 (Full on/Full off)	
Keystone	Manual & Auto Keystone Vertical \pm 40 Degree	
Aspect Ratio	4:3 Native (5 selectable aspect ratio)	
Color	Full 16.7 million color palette	
Lens	F=2.59~2.87	
Zoom Ratio	Manual Zoom, 1.3:1	
Image Size (Diagonal)	32" to 300"	
Throw Ratio	1.5 to 1.97(65"@6.56ft.)	
Lamp	230W 3500/5000hrs(Normal/Economic mode)	
Computer Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-92 kHz	
Vertical Scan Rate	48-120 Hz	
Input Terminals	PC:	Analog RGB: D-sub 15 pin x 2 (shared with Component) LAN Networking: RJ-45 x1 (LAN Display) USB connector: Type A x1 (USB Reader) USB Type mini B x1 (USB display)
	AV:	HDMI V1.3 x 1 S-Video: Mini Din 4 pin x1 Composite Video: RCA x1
	Audio:	Audio L/R : RCA x 1(set) Stereo Mini Jack x 1, Mic Input x1
Output Terminals	PC:	D-sub 15 pin x 1 Variable Audio Out : Stereo Mini Jack x1
	Audio:	10W x1
Control Terminal	Serial Connector : RS232 x 1 RJ45 x 1 (LAN Control) USB mini Type B x1(Page up/down) shared	
Dimensions (W x H x D)	12.24 x 4.09 x 9.6 inches (311 x 104 x 244 mm)	
Weight	5.94 lbs (2.7kg)	
Power Supply	100 to 240 VAC, 50/60 Hz	
Power Consumption	Max 306W, Standby < 1W	
Audible Noise	32/27dBA (Normal/Economic mode)	
On-Screen Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/ Indonesian/ Italian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/ Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)	
Picture Modes	Dynamic Mode, Cinema Mode, sRGB Mode Presentation Mode, User 1 Mode, User 2 Mode	
Functions	BrilliantColor™	Blank
	VIDI™	Panel Key Lock
Accessories (Standard)	3D Color Management	Auto Off
	Crestron LAN Control	Security Password
	Closed Captioning	HDTV Compatible
	Digital Zoom (x2)	High Altitude Mode
	Variable Audio Out	"Q?" Hot Key for FAQ
	Quick Cooling	3D Ready
	Quick Auto Search	Freeze
	Quick Start Guide	VGA(D-sub) Cable
	Manual CD	Power Cord
	Remote Control W/Battery	Soft Carry Case
Accessories (Optional)	Spare Lamp Kit; Wireless Dongle; Universal Ceiling Mount	
Lamp P/N	P/N: 5J.J3V05.001	
Limited Warranty	3-Year Parts & Labor / 1-Year or 2000 hours of lamp life	

*Lamp life results will vary depending on environmental conditions and usage.

MX711 8-01-11-US



BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 ☎ Tel: (949) 255-9500 🌐 www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.



Enjoyment Matters