

DESIGNED FOR EDUCATION

MX750

Future Proof • Excellent Image Quality • Affordable



Features

- Native XGA (1024 x 768) Resolution
- 3000 ANSI Lumens, 3000:1 Contrast Ratio
- LAN Control/Display, USB Reader/Display
- 1.6x Zoom Ratio, 20W Speaker Built-In
- 3D-Ready, Wireless Display (Optional)

Top / Front-Left View

Top




Front-Left



Input and Output Terminals

Back

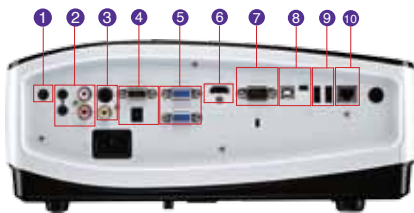

- | | |
|--------------------------|-------------------------------|
| ① Audio-Out x1 | ⑥ HDMI x1 |
| ② Audio In & MIC-In | ⑦ RS-232 x1 |
| ③ S-Video/Video | ⑧ USB Type B and Mini B |
| ④ RGB Output/12V Trigger | ⑨ USB Type A x2 |
| ⑤ RGB Input/Component x2 | ⑩ RJ45 x1 (Control & Display) |

Specifications

EDUCATION

Native Resolution	XGA (1024 x 768)
Brightness	3000 ANSI Lumens
Contrast Ratio	3000:1 (Full on/Full off)
Keystone	Auto Keystone; Manual Vertical +/- 40 Degree
Aspect Ratio	4:3 Native (5 Aspect Ratio Selectable)
Color	Full 16.7 Million colors palette
Lens	F = 2.68 ~ 2.84
Zoom Ratio	Manual Zoom; 1.6:1
Image Size (Diagonal)	26" ~ 352"
Throw Ratio	1.39 - 2.23 (70" @ 6.5 Feet)
Lamp Life	225W, 3000/4000 hours (Normal/Economical Mode)
PC Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-93 kHz
Vertical Scan Rate	48-120 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x2 LAN Networking: RJ45 x1 (LAN Display) USB (Type A) x2 (Reader) USB (Type B Mini) x1 (Display) HDMI (v1.3) x1
Output Terminals PC/AV	S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Microphone: Built-In Stereo Min-Jack x1 Audio L/R: RCA x2 Stereo Mini-Jack x1
Control Terminals	Component: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W x2, 12V Trigger
Dimensions (W x H x D)	Serial Connector: RS-232 9 Pin (Male) RJ45 x1 (LAN Control) Type Mini B (Page Up/Down)
Weight	12.97" x 5.11" x 9.78"
Power Supply	8 lbs (3.6 kg)
Power Consumption	100 to 240 VAC, 50/60 Hz
Noise Level	280W (Typical), Standby <1W
Display Languages	29/27 dBA (Normal/Economical Mode)
Picture Mode	Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese
Functions	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Accessories (Standard)	3D Ready/LAN Control/LAN Display/USB Display/USB Reader/Built-In 20W Speaker and Microphone Jack/Digital Zoom 2x/Closed Captioning/Panel Key Lock/Window 7 Compatible/Wireless Display(Optional)/High Altitude Mode
Accessories (Optional)	User Manual (CD)/Quick Start Guide/VGA Cable/Power Cord/ Remote Control with Battery/Soft Carrying Case
Lamp P/N	Wireless Dongle/Presentation Plus/SpareLamp Kit/ Ceiling Mount
Limited Warranty	5J.J2V05.001
	3-Years Parts/Labor / 1-Year or 2000 hours of lamp life

MX750_DM_BQus_3/11



BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

BenQ
Enjoyment Matters