

PROFESSIONAL PROJECTOR | MX761



SNMP



Features

- Native XGA (1024 x 768) Resolution
- 4200 ANSI Lumens, 5300:1 Contrast Ratio
- 1.6x Zoom Ratio, Lens Shift, Auto Keystone
- LAN Control/Display, USB Reader/Display
- 3D-Ready, Wireless Display (Optional)

Top / Front View




Top



Front

Input and Output Terminals

Back

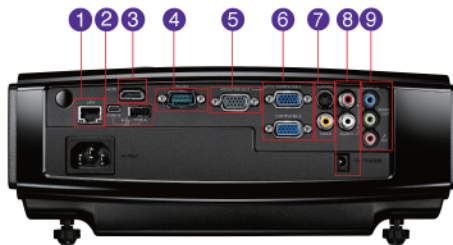

- 1 RJ45 (Control/Display)
- 2 USB Type A & Mini-B
- 3 HDMI x1
- 4 RS-232 x1
- 5 RGB Output x1
- 6 RGB In/Component x2
- 7 S-Video / Video
- 8 Audio R/L & 12V Trigger
- 9 Audio In & Out/Mic-In

Specifications

PRO AV

Native Resolution	XGA (1024 x 768)
Brightness	4200 ANSI Lumens
Contrast Ratio	5300:1 (Full on/Full off)
Keystone	Auto Keystone & Manual Vertical +/- 40 Degree
Aspect Ratio	4:3 Native, (5 Aspect Ratio Selectable)
Color	Full 1.07 Billion colors palette
Lens	F = 2.45 ~ 3.07, Lens Shift Vertical 110 ~ 130%
Zoom Ratio	Manual Zoom, 1.6:1
Image Size (Diagonal)	18" - 300"
Throw Ratio	1.4 to 2.24 (70"@ 6.5 feet)
Lamp Life	300W, 2000/3000 hours (Normal/Eco-Mode)
PC Compatibility	VGA (640 x 480) to UXGA (1600 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-99 kHz
Vertical Scan Rate	48-120 Hz
Input Terminals PC/AV	Analog RGB: D-Sub 15 Pin x2 LAN Network: RJ45 x1 (LAN Display) USB (Type A) x1 (Reader) USB (Type Mini-B) x1 (Display) HDMI (v1.3) x1 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2, Stereo Mini-Jack x1 Microphone-in: Mini-Jack x1
Output Terminals PC/AV	Analog RGB: D-Sub 15 Pin x1, 12V Trigger x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W Speaker x2
Control Terminals	Serial Connector: RS-232 9 Pin x1 (Male), RJ45 (LAN Control) USB Type Mini B (Page Up/Down)
Dimensions (W x H x D)	11.4" x 5.03" x 9.9"
Weight	7.26 lbs (3.3kg)
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	419W (Typical), Standby <1W
Noise Level	35/30 dBA (Normal/Eco-Mode)
Display Languages	Bulgarian/Croatian/Czech/Danish/Dutch/English/Finnish/ French/German/Hungarian/Italian/Japanese/Korean/ Norwegian/Polish/Romanian/Russian/Simplified Chinese/ Spanish/Swedish/Turkish/Thai/Traditional Chinese
Picture Mode	Dynamic Mode/Presentation Mode/sRGB Mode/Cinema Mode/User 1 Mode/ User 2 Mode
Functions	3D-Ready/Panel Key Lock/ "Q" Hot Key for FAQ/Security Password/Quick Cooling/Digital Zoom 2x/Quick Auto Search/High Altitude Mode/Closed Captioning/PC-Free/3D Color Management/Variable Audio Out
Accessories (Standard)	Quick Start Guide/User Manual (CD)/Remote Control/Power Cord/VGA Cable/Soft Carrying Case
Accessories (Optional)	Wireless Dongle/Spare Lamp Kit/Ceiling Mount
Lamp P/N	5J.J3J05.001
Limited Warranty	3-Year Parts & Labor/ 1-Year or 2000 hours of lamp life

MX761_DM_BQus_3/11



BenQ America Corp.

15375 Barranca Parkway, Suite A-205, Irvine, CA 92618 • Tel: (949) 255-9500 • www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

BenQ
Enjoyment Matters