

DIGITAL
PROJECTOR

SU917




Features

- Native WUXGA (1920 x 1200) Resolution
- 5,000 ANSI Lumens
- 13,000:1 Contrast Ratio
- Dual HDMI with MHL
- 2D Keystone with Corner Fit
- Vertical Lens Shift
- LAN Control and Display
- Optional Wireless Display



Input and Output Terminals

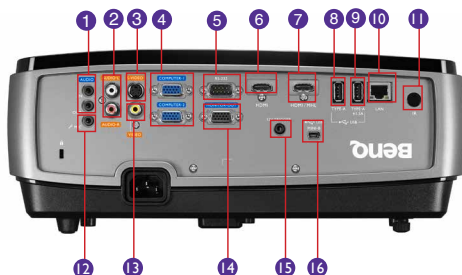

- | | |
|--------------------------------|----------------------------------|
| 1 Audio in/Out (Mini Jack) | 9 USB (Type A, Wireless Display) |
| 2 Audio In L & R (RCA) | 10 LAN |
| 3 S-Video In (Mini DIN 4pin) | 11 IR Receiver |
| 4 Computer 1 / 2 (D-sub 15pin) | 12 Mic |
| 5 RS232 (DB-9pin) | 13 Composite Video in (RCA) |
| 6 HDMI | 14 Monitor out (D-sub 15pin) |
| 7 HDMI/MHL | 15 12V Trigger |
| 8 USB (Type A) | 16 USB (Type mini B) |

Specifications

Projection System	DLP																																				
Native Resolution	WUXGA(1920x1200)																																				
Brightness	5000 AL																																				
Contrast Ratio	13000:1																																				
Display Color	1.07 Billion Colors																																				
Lens	F=2.42~2.95, f=20.77~31.13mm																																				
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)																																				
Throw Ratio	1.37~2.05 (Wide 60°±3% @ 1.8m)																																				
Image Size (Diagonal)	30"~300"																																				
Zoom Ratio	1.5x																																				
Lamp Type	340W																																				
Lamp (Normal/Economic/SmartEco Mode)*	2300/3000/3500 hours																																				
Keystone Adjustment	2D, Horizontal +/- 30 degrees, Vertical +/- 30 degrees																																				
Projection Offset	120%-145%																																				
Resolution Support	VGA(640 x 480) to WUXGA(1920 x 1200)																																				
Horizontal Frequency	15~102KHz																																				
Vertical Scan Rate	23~120Hz																																				
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM																																				
Interface	<table border="0"> <tr> <td>Computer in (D-sub 15pin)</td> <td>x 2(Share with component)</td> </tr> <tr> <td>Monitor out (D-sub 15pin)</td> <td>x 1</td> </tr> <tr> <td>Composite Video in (RCA)</td> <td>x 1</td> </tr> <tr> <td>S-Video in (Mini DIN 4pin)</td> <td>x 1</td> </tr> <tr> <td>HDMI</td> <td>x 2</td> </tr> <tr> <td>MHL</td> <td>x 1</td> </tr> <tr> <td>Audio in (RCA)</td> <td>x 1</td> </tr> <tr> <td>Audio in (Mini Jack)</td> <td>x 1</td> </tr> <tr> <td>Audio out (Mini Jack)</td> <td>x 1</td> </tr> <tr> <td>Speaker</td> <td>10W x 1</td> </tr> <tr> <td>Microphone (Mini Jack)</td> <td>x 1</td> </tr> <tr> <td>USB (Type mini B)</td> <td>x 1 (Download & page/down)</td> </tr> <tr> <td>USB (Type A)</td> <td>x 1 (Charger)</td> </tr> <tr> <td>USB (Type A)</td> <td>x 1 (Wireless Display)</td> </tr> <tr> <td>LAN (RJ45)</td> <td>x 1</td> </tr> <tr> <td>RS232 (DB-9pin)</td> <td>x 1</td> </tr> <tr> <td>12V Trigger</td> <td>x 1</td> </tr> <tr> <td>IR Receiver</td> <td>x 2 (Front and Rear)</td> </tr> </table>	Computer in (D-sub 15pin)	x 2(Share with component)	Monitor out (D-sub 15pin)	x 1	Composite Video in (RCA)	x 1	S-Video in (Mini DIN 4pin)	x 1	HDMI	x 2	MHL	x 1	Audio in (RCA)	x 1	Audio in (Mini Jack)	x 1	Audio out (Mini Jack)	x 1	Speaker	10W x 1	Microphone (Mini Jack)	x 1	USB (Type mini B)	x 1 (Download & page/down)	USB (Type A)	x 1 (Charger)	USB (Type A)	x 1 (Wireless Display)	LAN (RJ45)	x 1	RS232 (DB-9pin)	x 1	12V Trigger	x 1	IR Receiver	x 2 (Front and Rear)
Computer in (D-sub 15pin)	x 2(Share with component)																																				
Monitor out (D-sub 15pin)	x 1																																				
Composite Video in (RCA)	x 1																																				
S-Video in (Mini DIN 4pin)	x 1																																				
HDMI	x 2																																				
MHL	x 1																																				
Audio in (RCA)	x 1																																				
Audio in (Mini Jack)	x 1																																				
Audio out (Mini Jack)	x 1																																				
Speaker	10W x 1																																				
Microphone (Mini Jack)	x 1																																				
USB (Type mini B)	x 1 (Download & page/down)																																				
USB (Type A)	x 1 (Charger)																																				
USB (Type A)	x 1 (Wireless Display)																																				
LAN (RJ45)	x 1																																				
RS232 (DB-9pin)	x 1																																				
12V Trigger	x 1																																				
IR Receiver	x 2 (Front and Rear)																																				
Dimensions (WxHxD)	13.3" x 10.2" x 5.8" / 339.3 x 260.3 x 147.3 mm																																				
Weight	8.16 lbs / 3.7kg																																				
Power Supply	AC100 to 240 V, 50 to 60 Hz																																				
Power Consumption	390W(Normal), 330W (Eco), Network standby <6.0W Standby<0.5W																																				
Audible Noise	36/34 dBA (Normal/Economic mode)																																				
Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)																																				
Picture Mode	Dynamic/Presentation/sRGB/Cinema(3D)/User 1/User 2																																				
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord (by region), User Manual CD, Quick Start Guide, Warranty Card (by region), VGA(D-sub 15pin) Cable																																				
Accessories (Optional)	<table border="0"> <tr> <td>Spare Lamp Kit</td> <td>P/N: 5J.JCT05.001</td> </tr> <tr> <td>Ceiling Mount Kit</td> <td>P/N: 5J.JAM10.001</td> </tr> <tr> <td>3D Glasses</td> <td>P/N: 5J.J9H25.001</td> </tr> <tr> <td>Remote Control</td> <td>P/N: 5J.JA606.001</td> </tr> </table>	Spare Lamp Kit	P/N: 5J.JCT05.001	Ceiling Mount Kit	P/N: 5J.JAM10.001	3D Glasses	P/N: 5J.J9H25.001	Remote Control	P/N: 5J.JA606.001																												
Spare Lamp Kit	P/N: 5J.JCT05.001																																				
Ceiling Mount Kit	P/N: 5J.JAM10.001																																				
3D Glasses	P/N: 5J.J9H25.001																																				
Remote Control	P/N: 5J.JA606.001																																				
UPC / Part #	8400460-3096-4 / 9H.JCT77.35A																																				
Limited Warranty	3 Years Parts/Labor; 1 Year or 2000 hours of lamp life.																																				

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



BenQ.us • BenQ.ca

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.


SU917 112415



Because it matters

SU917 Digital Projector




Distance Chart

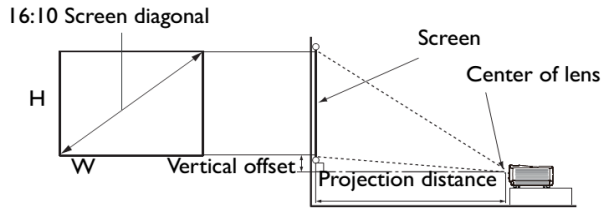

Screen Size			Distance from screen (inch/mm)			Vertical offset (inch/mm) 120% / 145%	
Diagonal Inch	Diagonal mm	Width (inch/mm)	Height (inch/mm)	Min distance (max. zoom)	Average		Max distance (min. zoom)
40	1016	34 / 862	21 / 538	46.1 / 1171	58.8 / 1494	71.5 / 1817	2.1/4.7 / 54/121
60	1524	50 / 1292	32 / 808	70.1 / 1783	89.2 / 2267	108.2 / 2750	3.1/7.1 / 81/182
80	2032	67 / 1723	42 / 1077	94.3 / 2396	119.6 / 3040	145.0 / 3683	4.2/9.5 / 108/242
100	2540	84 / 2154	53 / 1346	118.4 / 3008	150.0 / 3812	181.7 / 4616	5.3/11.9 / 135/303
120	3048	101 / 2585	63 / 1615	142.5 / 3620	180.5 / 4585	218.5 / 5550	6.3/14.2 / 162/363
150	3810	127 / 3231	79 / 2019	178.7 / 4539	226.1 / 5744	273.5 / 6949	7.9/17.8 / 202/454
200	5080	169 / 4308	106 / 2692	238.9 / 6070	302.2 / 7676	365.4 / 9282	10.5/23.8 / 269/606
250	6350	212 / 5385	132 / 3365	299.9 / 7601	378.2 / 9608	457.2 / 11615	13.2/29.8 / 337/757
300	7620	254 / 6462	159 / 4039	359.4 / 9131	454.3 / 11540	549.1 / 13948	15.9/35.7 / 404/909

Ceiling Mount Chart

Units: inch / mm

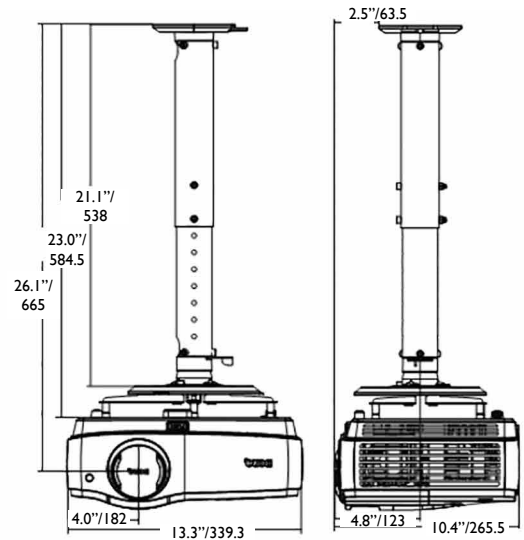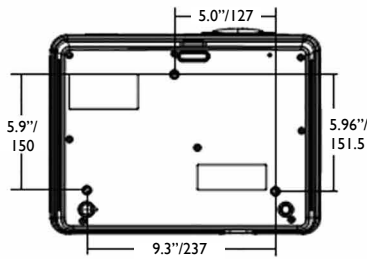

Dimensions

Units: inch / mm



Because it matters