

DIGITAL
PROJECTOR

W1080ST




Features

- Native Full HD 1080P (1920x1080) Resolution
- 2,000 ANSI Lumens, 10,000:1 High Contrast Ratio
- Short Throw Lens
- SmartEco™ Power Saving Technology
- Various 3D Format and nVidia 3DTV Play
- REC 709 Color Performance



Input and Output Terminals

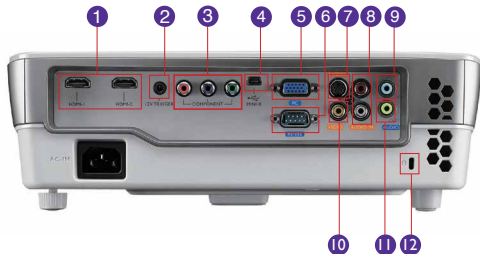

- | | |
|-----------------------------|------------------------------|
| 1 HDMI 1 & 2 | 7 S-Video In (Mini DIN 4pin) |
| 2 DC 12V Trigger | 8 Audio In L & R (RCA) |
| 3 Component Video In (RCA) | 9 Audio In (Mini Jack) |
| 4 USB (Mini B) | 10 Component Video in |
| 5 Computer in (D-sub 15pin) | 11 Audio Out (Mini Jack) |
| 6 RS232 (DB-9pin) | 12 Security Bar |

Specifications

Projection System	DLP®
Native Resolution	1080p (1920x1080)
Brightness	2,000 ANSI lumens
Contrast Ratio	10,000:1
Display Color	1.07 Billion Colors
Lens	F= 2.6-2.78, f=10.2-12.24mm
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
Throw Ratio	0.69-0.83 (65.7" @ 1M)
Image Size (Diagonal)	38"-300"
Zoom Ratio	1.2:1
Lamp Type	240W
Lamp (Normal/Economic Mode)*	3500/5000/6000 hours
Keystone Adjustment	1D, Vertical +/- 40 degrees
Projection Offset	105%±5%
Resolution Support	WUXGA_RB(1920 x 1200) *RB = Reduced blanking
Horizontal Frequency	15K-102KHz
Vertical Scan Rate	23-120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Video Compatibility: NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 1 HDMI x 2 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 Component Video in x 1 Audio in (Mini Jack) x 1 Audio L/R in (RCA) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 USB (Type Mini B) x 1 RS232 (DB-9pin) x 1 DC 12V Trigger x 1
Dimensions (WxHxD)	12.28" x 4.09 x 9.6"
Weight	6.2 lbs
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	359W (max), Standby < 0.5W
Audible Noise	33/30 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	Dynamic / Standard / Cinema / 3D / User 1 / User 2 / User 3
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA (D-sub 15pin) Cable, Carry Bag
Accessories (Optional)	Spare Lamp Kit P/N: 5J.J7L05.001 Ceiling Mount P/N: 5J.J4N10.001 3D Glasses P/N: 5J.J7L25.002 Remote P/N: 5J.J7K06.001
UPC / Part #	8400460-2571-7 / 9H.J7M77.17A
Limited Warranty	1 Year Parts/Labor; 180 days or 500 hours of lamp life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



W1080ST 10-15-14-BQus



BenQ America Corp.
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.




Because it matters

WI080ST Digital Projector

Distance Chart


Floor Installation

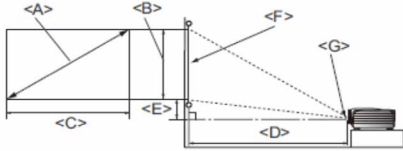

<F>: Screen

<G>: Center of lens

Ceiling Installation

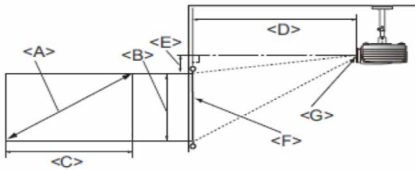

<F>: Screen



<G>: Center of lens

The screen aspect ratio is 16:9 and the projected picture is 16:9

Screen Dimensions			Projection Distance <D> (inch)			Lowest/Highest lens position <E> (inch)	
Diagonal <A>		Height 	Width <C>	Min Distance	Average		Max Distance
Inch	mm	(inch)	(inch)	(with max zoom)			(with min zoom)
30	762	15	26	18	20	22	.35
40	1016	20	35	24	26	28	.47
50	1270	25	44	30	33	36	.62
60	1524	30	52	36	40	43	.74
70	1778	34	61	42	46	50	.86
80	2032	39	70	48	53	58	.98
90	2286	44	78	54	60	65	1.1
100	2540	49	87	60	66	72	1.2
110	2794	54	96	66	73	80	1.3
120	3048	59	104	72	80	86	1.4
130	3302	64	113	78	86	94	1.6
140	3556	68	122	84	92	101	1.7
150	3810	74	130	90	98	108	1.8
160	4064	78	140	96	105	115	1.9
170	4318	83	148	101	112	122	2.1
180	4572	88	157	108	119	129	2.2
190	4826	93	165	114	125	137	2.3
200	5080	98	174	120	132	144	2.4
250	6350	122	218	150	164	180	3.1
300	7620	147	261	180	198	216	3.7

Ceiling Mount Chart

Ceiling Mount Screws:
M4 (Max. L = 25 mm,
Min. L = 20 mm)

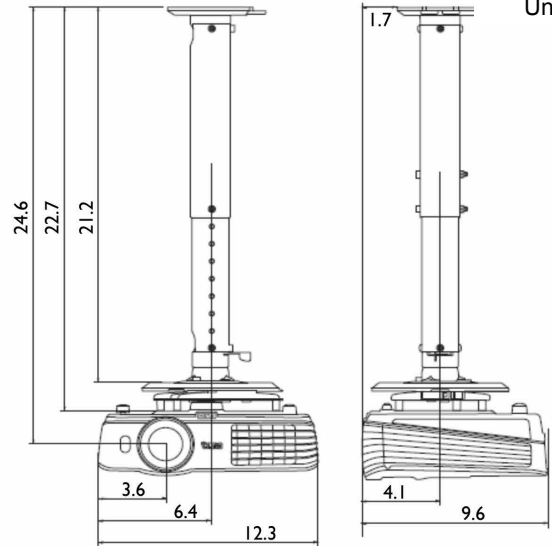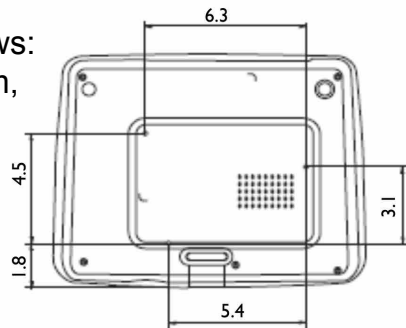

Units: inch

Dimensions



Units: inch



Because it matters