




Features

- Native XGA Resolution (1024x768)
- 3,700 ANSI Lumens
- 13,000:1 Contrast Ratio
- SmartEco™ Power Saving Technology
- 2D Keystone with Corner Fit
- LAN Control and Display
- Optional Wireless Display



Input and Output Terminals

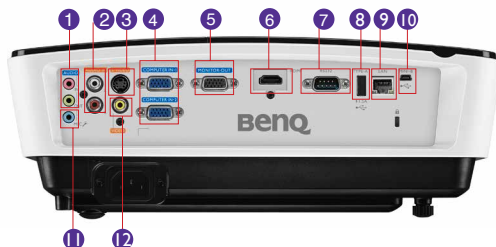

- | | |
|-------------------------------------|-----------------------------|
| 1 Audio In & Out (Mini Jack) | 7 RS232 (DB-9pin) |
| 2 Audio in (L/R) | 8 USB (Type A) |
| 3 S-Video (Mini DIN 4-pin) | 9 LAN |
| 4 Computer In - I / 2 (D-sub 15pin) | 10 USB (Type mini-B) |
| 5 Monitor Out (D-sub 15pin) | 11 Mic |
| 6 HDMI | 12 Composite Video in (RCA) |

Specifications

Projection System	DLP
Native Resolution	XGA (1024x768)
Brightness	3,700 ANSI Lumen
Contrast Ratio	13,000:1
Display Color	1.07 Billion Colors
Lens	F=2.5~3.12, f=16~25.46mm
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)
Throw Ratio	1.4~2.3 (Wide 60"±3% @ 1.7m)
Image Size Diagonal	60"~300"
Zoom Ratio	1.6:1
Lamp Type	260W
Lamp(Normal/Economic/SmartEco Mode)*	2000/3500/5000 hours
Keystone Adjustment	2D, Horizontal +/- 30 degrees, Vertical +/- 30 degrees
Projection Offset	130%±5%
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin) x 2(Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (RCA) x 1 Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 Microphone (Mini Jack) x 1 USB (Type mini B) x 1 (Download & page/down) USB (Type A) x 1 (Charger) LAN (RJ45) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1
Dimensions (WxHxD)	327.3 x 136.7 x 232.8 mm
Weight	2.6kg (5.73lbs)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	310W (Normal), 270W(Eco), Standby<0.5W
Audible Noise	35/33 dBA (Normal/Economic mode)
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)
Picture Mode	Dynamic/Presentation/sRGB/Cinema/User 1/User 2
Accessories (Standard)	Lens Cover, Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA(D-sub 15pin) Cable
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JCV05.001 Ceiling Mount P/N: 5J.J4N10.001 3D Glasses P/N: 5J.J9H25.001
UPC Code / Part #	8400460-3097-1 / 9H.JCV77.33A
Limited Warranty	3 Years Parts & Labor / 1 Year or 2,000 hours of lamp life

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.



MX723 11-24-14-BQ.ca



BenQ Canada Corp.

Tel: (416) 363-2367 www.BenQ.ca


BenQ is a registered trademark of BenQ Corp. DLP is a registered trademark of Texas Instruments. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.



Because it matters


MX723 Digital Projector

Distance Chart

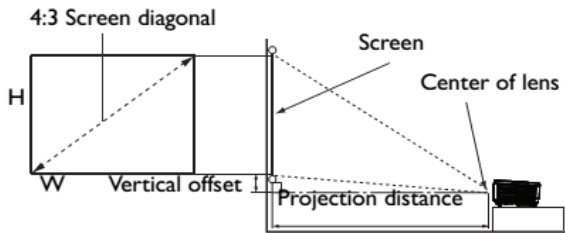

Screen Size				Distance from screen (mm)			Vertical offset (mm)
Diagonal		Width (mm)	Height (mm)	Min distance	Average	Max length	
Inch	mm			(max. zoom)		(min. zoom)	
40	1016	813	610	1138	1544	1951	91
60	1524	1219	914	1707	2316	2926	137
80	2032	1626	1219	2276	3089	3901	183
100	2540	2032	1524	2845	3861	4877	229
120	3048	2438	1829	3414	4633	5852	274
150	3810	3048	2286	4267	5791	7315	343
200	5080	4064	3048	5690	7722	9754	457
250	6350	5080	3810	7112	9652	12192	572
300	7620	6096	4572	8534	11582	14630	686

Ceiling Mount Chart

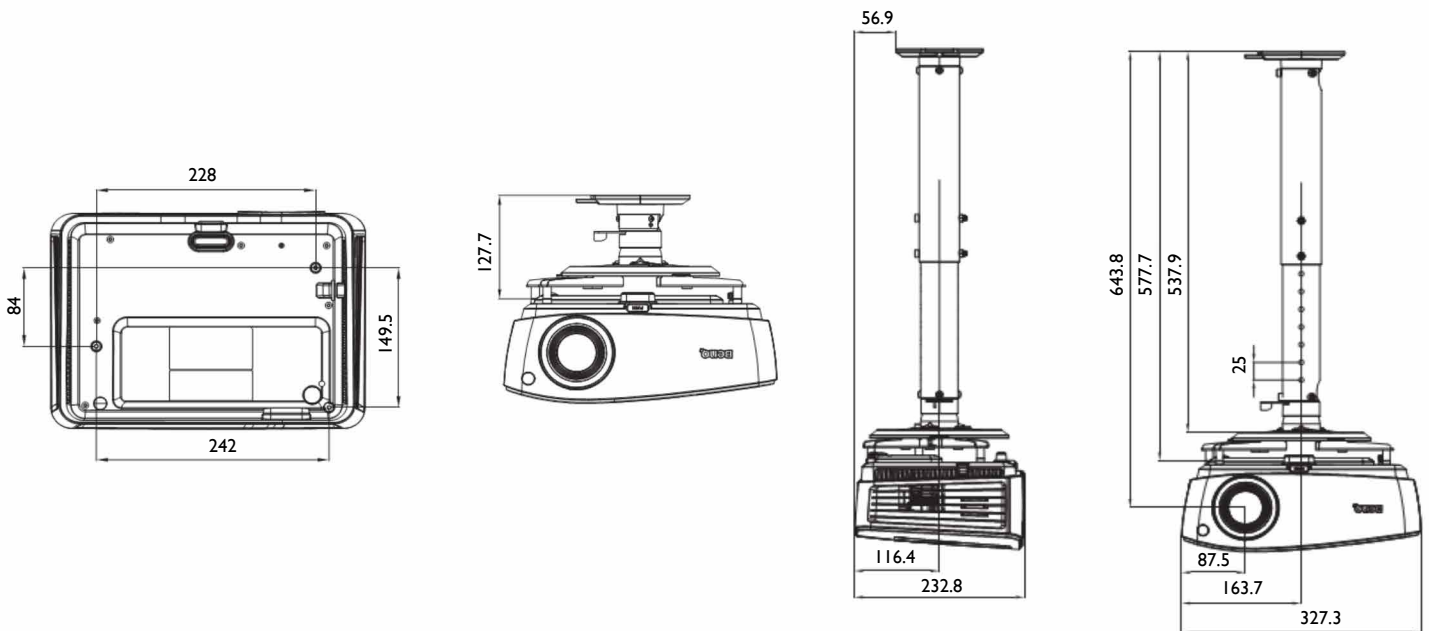

Dimensions

Units: mm

