



**Model Name** **MW767 Digital Projector**

**Unique selling point** **Trade Mark**

- \* Designed for Education
- \* Easy Installation & Control
- \* Easy Maintenance
- \* High Brightness
- \* Qpresenter APP




<b>Projection System</b>	DLP	
<b>Native Resolution</b>	WXGA(1280x800)	
<b>Brightness</b>	4200AL	
<b>Contrast Ratio</b>	13000:1	
<b>Display Color</b>	1.07 Billion Colors	
<b>Lens</b>	F=2.42-2.98, f=20.7-31.13mm	
<b>Aspect Ratio</b>	Native 16:10 (5 aspect ratio selectable)	
<b>Throw Ratio</b>	1.45-2.24 (63"@2m)	
<b>Image Size (Diagonal)</b>	47"-300"	
<b>Zoom Ratio</b>	1.5:1	
<b>Lamp Type</b>	310W	
<b>Lamp(Normal/Economic/SmartEco Mode)*</b>	2500/3000/3500 hours	
<b>Keystone Adjustment</b>	1D, Vertical +/- 40 degrees	
<b>Projection Offset</b>	125% ±5%	
<b>Resolution Support</b>	VGA(640 x 480) to UXGA(1600 x 1200)	
<b>Horizontal Frequency</b>	27K~102KHz	
<b>Vertical Scan Rate</b>	23~120Hz	
<b>Compatibility</b>	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
<b>Interface</b>	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	HDMI	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	Audio in (Mini Jack)	x 2
	Audio L/R in (RCA)	x 1
	Audio out (Mini Jack)	x 1
	Microphone in (Mini Jack)	x 1
	Speaker	20W x 1
	LAN (RJ45)	x 1 (LAN Control & LAN Display & Audio)
	USB (Type A)	x 2 (USB Reader & Wireless Display & Remote Desktop)
	USB (Type mini B)	x 1 (USB Display & Download)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 2 (Front+Top)
<b>Dimensions</b>	Dimensions(W x H x D)	329x 137.2 x 256.2mm
	Weight	3.9kg
<b>Power</b>	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	340W(typical), Standby<0.5W
<b>Audible Noise</b>	38/36 dBA (Normal/Economic mode)	
<b>On-Screen Display Languages</b>	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
<b>Picture Modes</b>	Dynamic/Presentation/sRGB/Cinema/User 1/User 2	
<b>Accessories</b>	<b>Standard</b>	<b>Optional</b>
	Remote Control w/ Battery	Presentation Plus P/N: 65J9306.002
	Power Cord (by region)	Spare Lamp Kit P/N: 5J6R05.001
	User Manual CD	Ceiling Mount P/N: 5J2K01.001
	Quick Start Guide	3D Glasses P/N: 5JJ0T14.011
	Warranty Card (by region)	Carry bag
	VGA(D-sub 15pin) Cable	

\*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

# MW767 Digital Projector


## Distance Chart

### MW767

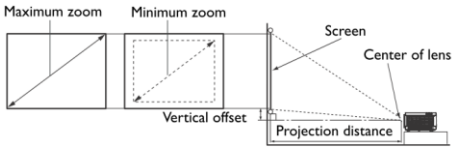


Screen size				Distance from screen (cm)			Vertical offset (cm)
Diagonal		W (cm)	H (cm)	Min length (max. zoom)	Average	Max length (min. zoom)	
Inch	cm						
40	102	86	54	1.24	1.58	1.92	6.7
60	152	129	81	1.88	2.39	2.89	10.1
80	203	172	108	2.52	3.20	3.87	13.5
100	254	215	135	3.16	4.01	4.85	16.8
150	381	323	202	4.77	6.03	7.29	25.2
200	508	431	269	6.38	8.06	9.74	33.7
250	635	538	337	7.98	10.08	12.18	42.1
300	762	646	404	9.59	12.11	14.63	50.5

## Wall mount/Ceiling mount Chart

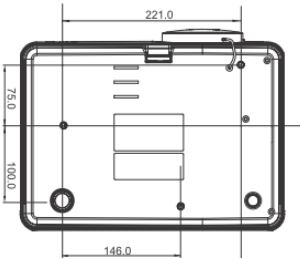

**Ceiling mount screw: M4**  
(Max L = 25 mm; Min L = 20 mm)

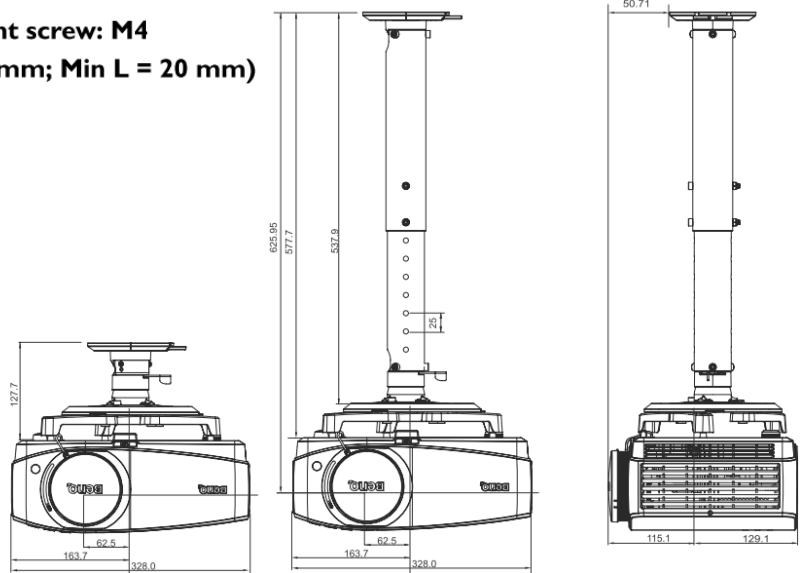

## Dimension

